



# MI-ComPAC<sup>TM</sup>

## Military DC-DC Power Supplies

### Product Highlights

The MI-ComPAC is a complete single, dual, or triple output DC-DC power supply that delivers up to 300W from inputs of 28Vdc or 270Vdc.

The MI-ComPAC meets the conducted emissions and conducted susceptibility specifications of MIL-STD-461C/D/E and offers complete input transient, surge, and spike protection to the most severe levels of MIL-STD-1275A, 704A.

Reverse polarity protection and over/undervoltage lockout provide additional safeguards against potentially damaging line conditions. The MI-ComPAC also features a master disable.

### Features

- ✧ Inputs: 28Vdc per MIL-STD-704A, MIL-STD-1275A  
270Vdc per MIL-STD-704D/E
- ✧ Outputs: 1 to 3, 2 to 48Vdc
- ✧ Up to 5W/in<sup>3</sup>
- ✧ MIL-STD-461C/D/E EMI compliance
- ✧ High efficiency
- ✧ Remote sense
- ✧ ZVS/ZCS power architecture
- ✧ Low noise FM control
- ✧ Reverse polarity protection
- ✧ Size — 1- up: 8.6" x 2.5" x 0.99" (219,2 x 64,5 x 25,1mm)
- ✧ Size — 2- up: 8.6" x 4.9" x 0.99" (219,2 x 126,0 x 25,1mm)
- ✧ Size — 3- up: 8.6" x 7.3" x 0.99" (219,2 x 187,45 x 25,1mm)

### Configuration Chart

| Single Output |  |            |                     |  | Number of Modules |
|---------------|--|------------|---------------------|--|-------------------|
|               |  |            |                     |  |                   |
| MI-LC         |  | 50 – 100W  | 8.6" x 2.5" x 0.99" |  | 1                 |
| MI-MC         |  | 150 – 200W | 8.6" x 4.9" x 0.99" |  | 2                 |
| MI-NC         |  | 300W       | 8.6" x 7.3" x 0.99" |  | 3                 |
| Dual Output   |  |            |                     |  |                   |
|               |  |            |                     |  |                   |
| MI-PC         |  | 100 – 200W | 8.6" x 4.9" x 0.99" |  | 2                 |
| MI-QC         |  | 200 – 300W | 8.6" x 7.3" x 0.99" |  | 3                 |
| Triple Output |  |            |                     |  |                   |
|               |  |            |                     |  |                   |
| MI-RC         |  | 150 – 300W | 8.6" x 7.3" x 0.99" |  | 3                 |

**Conduction Cooled Models Available Add "-CC" to the end of the part number.**

(Consult factory for details.)

| Input Voltage |                           | Output Voltage |           |           | Product Grade      |  |
|---------------|---------------------------|----------------|-----------|-----------|--------------------|--|
| Nominal       | Range                     | Z = 2V         | T = 6.5V  | N = 18.5V | I = -40°C to +85°C |  |
| 2 = 28Vdc     | 18 – 50V                  | Y = 3.3V       | R = 7.5V  | 3 = 24V   | M = -55°C to +85°C |  |
| 6 = 270Vdc    | 125 – 400V <sup>(1)</sup> | 0 = 5V         | M = 10V   | L = 28V   |                    |  |
|               |                           | X = 5.2V       | 1 = 12V   | J = 36V   |                    |  |
|               |                           | W = 5.5V       | P = 13.8V | K = 40V   |                    |  |
|               |                           | V = 5.8V       | 2 = 15V   | 4 = 48V   |                    |  |

| Output Power / Current |          | Output Power / Current |          | Output Power / Current |         |
|------------------------|----------|------------------------|----------|------------------------|---------|
|                        | ≥5V <5V  |                        | ≥5V <5V  |                        | ≥5V <5V |
| Y =                    | 50W 10A  | V =                    | 150W 30A | S =                    | 300W —  |
| X =                    | 75W 15A  | U =                    | 200W —   | P =                    | — 90A   |
| W =                    | 100W 20A | S =                    | — 60A    |                        |         |
| V =                    | — 30A    |                        |          |                        |         |

<sup>(1)</sup> These units rated at 75% load from 125-150Vin: 5Vout @ 100W; 2Vout and 3.3Vout @ 30A.

## Specifications

(At  $T_{BP} = 25^{\circ}\text{C}$ , nominal line and 75% load, unless otherwise specified)

| PARAMETER                                                            | MIN                                                            | TYP                | MAX               | UNITS                 | NOTES                                                                    |
|----------------------------------------------------------------------|----------------------------------------------------------------|--------------------|-------------------|-----------------------|--------------------------------------------------------------------------|
| <b>Input Characteristics</b>                                         |                                                                |                    |                   |                       |                                                                          |
| 28Vdc input modules                                                  |                                                                |                    |                   |                       |                                                                          |
| Steady state input                                                   | 18                                                             | 28                 | 50                | Vdc                   |                                                                          |
| Low line lockout                                                     |                                                                |                    | 16                | Vdc                   | Automatic recovery                                                       |
| Input spike limit                                                    | -600                                                           |                    | +600              | Vdc                   | 20 $\mu$ s, 50 $\Omega$ per MIL-STD-704A                                 |
|                                                                      | -250                                                           |                    | +250              | Vdc                   | 100 $\mu$ s, 15mJ per MIL-STD-1275A                                      |
| Input surge limit                                                    |                                                                |                    | 100               | Vdc                   | 60ms, 0.5 $\Omega$ per MIL-STD-1275A                                     |
| Overvoltage shutdown                                                 | 50                                                             |                    |                   | Vdc                   | 100ms automatic recovery                                                 |
| Reverse polarity protection                                          |                                                                |                    |                   |                       | Shunt diode: input fuse required                                         |
| Recommended fuse                                                     |                                                                |                    | 10 <sup>(1)</sup> | Amps                  | F03A type                                                                |
| 270Vdc input modules                                                 |                                                                |                    |                   |                       |                                                                          |
| Steady state input                                                   | 125                                                            | 270                | 400               | Vdc                   |                                                                          |
| Low line lockout                                                     |                                                                |                    | 125               | Vdc                   | Automatic recovery                                                       |
| Input spike limit                                                    |                                                                |                    | +800              | Vdc                   | 20 $\mu$ s, 50 $\Omega$                                                  |
|                                                                      | -600                                                           |                    | +600              | Vdc                   | 100 $\mu$ s, 15mJ                                                        |
| Input surge limit                                                    |                                                                |                    | 500               | Vdc                   | 100ms, 0.5 $\Omega$                                                      |
| Overvoltage shutdown                                                 | 400                                                            |                    |                   | Vdc                   | 100 $\mu$ s automatic recovery                                           |
| Reverse polarity protection                                          |                                                                |                    |                   |                       | Shunt diode: input fuse required                                         |
| Recommended fuse                                                     |                                                                |                    | 2 <sup>(1)</sup>  | Amps                  | F03A type                                                                |
| All models                                                           |                                                                |                    |                   |                       |                                                                          |
| No load power dissipation                                            |                                                                | 1.5 <sup>(1)</sup> | 2 <sup>(1)</sup>  | Watts                 |                                                                          |
| Master disable input current <sup>(2)</sup><br>(Absolute max., 20mA) | 4                                                              |                    |                   | mA                    | Sink; disables all outputs                                               |
| Inrush current                                                       |                                                                | 110                | 125               | %, $I_{in}$           | Steady state $I_{in}$ , 10ms                                             |
| <b>EMC Characteristics; MIL-STD-461C/D/E</b>                         |                                                                |                    |                   |                       |                                                                          |
| Input power leads                                                    |                                                                |                    |                   |                       |                                                                          |
| Conducted emissions                                                  | CE01, CE03, CE07<br>CE101, CE102<br>CE101                      |                    |                   |                       | MIL-STD-461C — 1-up<br>MIL-STD-461D — 1-up<br>MIL-STD-461E — 2-up & 3-up |
| Conducted susceptibility                                             | CS01, CS02, CS06<br>CS101, CS114, CS116<br>CS101, CS114, CS116 |                    |                   |                       | MIL-STD-461C — 1-up<br>MIL-STD-461D — 1-up<br>MIL-STD-461E — 2-up & 3-up |
| <b>Output Characteristics</b>                                        |                                                                |                    |                   |                       |                                                                          |
| Setpoint accuracy                                                    |                                                                | 0.5                | 1.0               | % Vnom                |                                                                          |
| Load/line regulation                                                 |                                                                | 0.2                | 0.5               | % Vnom                | LL to HL, NL to 10%<br>LL to HL, 10% to FL                               |
|                                                                      |                                                                | 0.05               | 0.2               | % Vnom                |                                                                          |
| Output temperature drift                                             |                                                                | 0.01               | 0.02              | %/ $^{\circ}\text{C}$ |                                                                          |
| Output noise – p-p                                                   |                                                                | 1.0                | 1.5               | % Vnom                | Whichever is greater<br>20MHz BW                                         |
|                                                                      |                                                                | 100                | 150               | mV                    |                                                                          |
| Output voltage trimming <sup>(3)</sup>                               | 50                                                             |                    | 110               | % Vnom                |                                                                          |
| Remote sense compensation                                            | 0.5                                                            |                    |                   | Vdc                   |                                                                          |
| OVP setpoint                                                         | 115                                                            | 125                | 135               | % Vnom                | Latching                                                                 |
| Current limit                                                        | 105                                                            |                    | 125               | % Inom                | Auto restart                                                             |
| Short circuit current <sup>(4)</sup>                                 | 20                                                             |                    | 130               | % Inom                |                                                                          |
| <b>Isolation Characteristics</b>                                     |                                                                |                    |                   |                       |                                                                          |
| Input to output                                                      | 4,242                                                          |                    |                   | Vrms                  | 1 min.                                                                   |
| Input to case                                                        |                                                                |                    |                   |                       |                                                                          |
| 28Vdc input                                                          | 2,121                                                          |                    |                   | Vrms                  | 1 min.                                                                   |
| 270Vdc input                                                         | 2,500                                                          |                    |                   | Vrms                  | 1 min.                                                                   |
| Output to case                                                       | 500                                                            |                    |                   | Vrms                  | 1 min.                                                                   |
| <b>Thermal Characteristics</b>                                       |                                                                |                    |                   |                       |                                                                          |
| Efficiency                                                           |                                                                | 81                 |                   | %                     |                                                                          |
| Operating temperature, case                                          |                                                                |                    | +85               | $^{\circ}\text{C}$    | See product grade                                                        |
| Storage temperature                                                  |                                                                |                    | +100              | $^{\circ}\text{C}$    | See product grade                                                        |
| Shutdown temperature                                                 | +90                                                            | +95                | +105              | $^{\circ}\text{C}$    | Cool and recycle power to restart                                        |
| <b>Mechanical Specifications</b>                                     |                                                                |                    |                   |                       |                                                                          |
| Weight                                                               |                                                                |                    |                   |                       |                                                                          |
| 1-up                                                                 |                                                                | 1.2 (544)          |                   | pounds (grams)        |                                                                          |
| 2-up                                                                 |                                                                | 2.4 (1248)         |                   | pounds (grams)        |                                                                          |
| 3-up                                                                 |                                                                | 3.6 (1633)         |                   | pounds (grams)        |                                                                          |
| Connector screw torque                                               |                                                                | 3.5 (0.4)          |                   | inches-pounds (N-M)   |                                                                          |



<sup>(1)</sup> Per internal module configuration.

<sup>(2)</sup> Multiply minimum x 2 for 2-ups and x 3 for 3-ups.

<sup>(3)</sup> 10V, 12V, and 15V outputs, standard trim range  $\pm 10\%$ . Consult factory for wider trim range.


<sup>(4)</sup> Output ranges of 5V or less incorporate foldback current limiting, outputs of 10V and above incorporate straight line current limiting.

## Long Term Safe Operating Area Curves\*

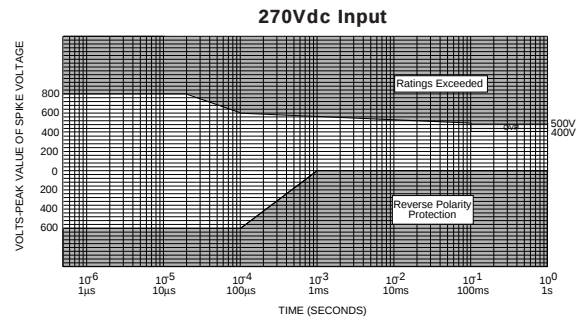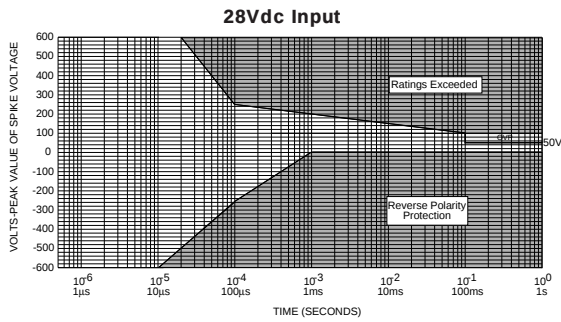

\* 1% duty cycle max., for short duration transient capability refer to specifications

## Disable Circuit

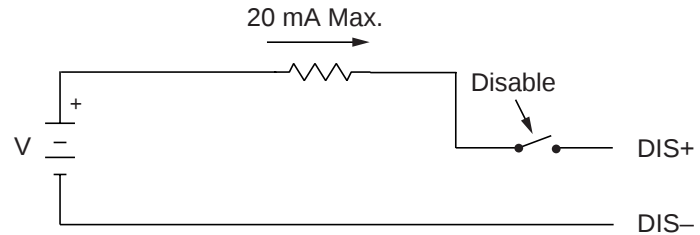

### Disable Current

- 4mA DC minimum for 1-up ComPAC
- 8mA DC minimum for 2-up ComPAC
- 12mA DC minimum for 3-up ComPAC

The MI-ComPAC incorporates an optically isolated master disable input which will shut down the MI-ComPAC when a current is driven through the disable terminals.

## Thermal Considerations

### Thermal Impedance — Case-to-Air (°C/W)


|                                                 | Standard Units |      |      | With Optional Heat Sink <sup>(1)</sup> |      |      |
|-------------------------------------------------|----------------|------|------|----------------------------------------|------|------|
|                                                 | 1-up           | 2-up | 3-up | 1-up                                   | 2-up | 3-up |
| Free Air (Horiz.)                               | 3.6            | 1.7  | 1.4  | 2.1                                    | 1.3  | 1.0  |
| <b>Forced Convection Through Heat Sink Fins</b> |                |      |      |                                        |      |      |
| 50 LFM                                          | 2.7            | 1.4  | 1.3  | 1.5                                    | 1.1  | 0.9  |
| 100 LFM                                         | 2.3            | 1.3  | 1.1  | 1.2                                    | 0.9  | 0.7  |
| 250 LFM                                         | 1.6            | 1.0  | 0.8  | 0.7                                    | 0.5  | 0.4  |
| 500 LFM                                         | 1.2            | 0.7  | 0.6  | 0.4                                    | 0.3  | 0.3  |
| 750 LFM                                         | 0.9            | 0.5  | 0.5  | 0.3                                    | 0.2  | 0.2  |
| 1000 LFM                                        | 0.8            | 0.4  | 0.4  | 0.2                                    | 0.2  | 0.2  |

- Thermal impedance, chassis-to-air, is provided for 1-up, 2-up and 3-up MI-ComPAC package configurations as a function of air flow.
- Case temperature = (total power dissipated x thermal impedance) + ambient temperature.
- Watts dissipated per output = (output power ÷ efficiency) – output power.


<sup>(1)</sup> To order optional heat sink add -H1 to part number

## Inputs


## Outputs

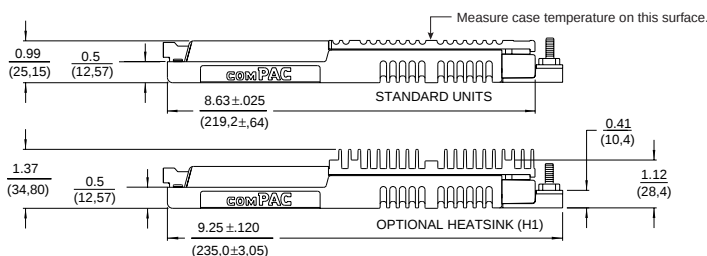


### 1-Up

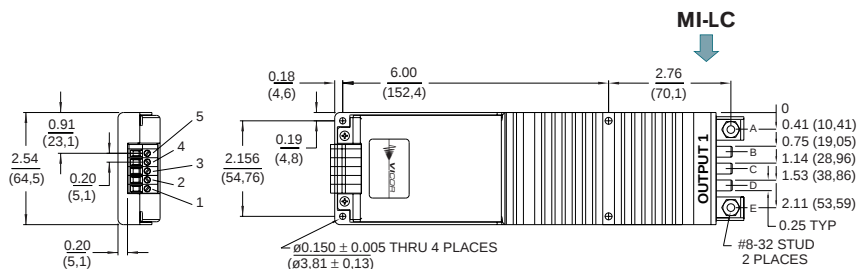

### 2-Up

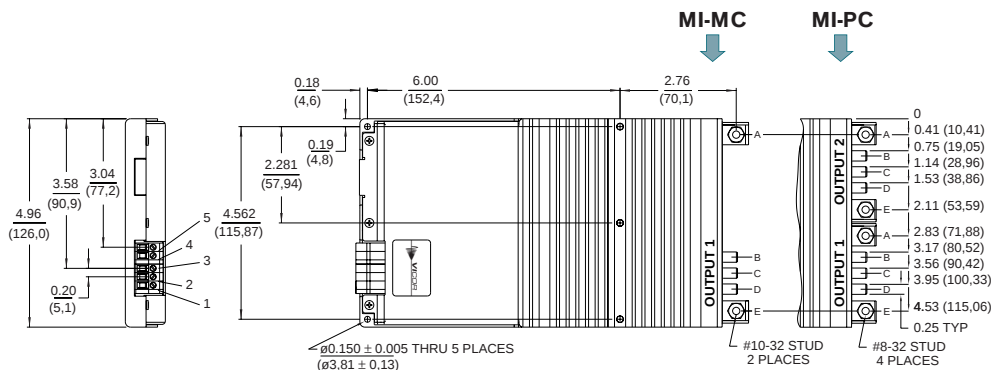

### 3-Up

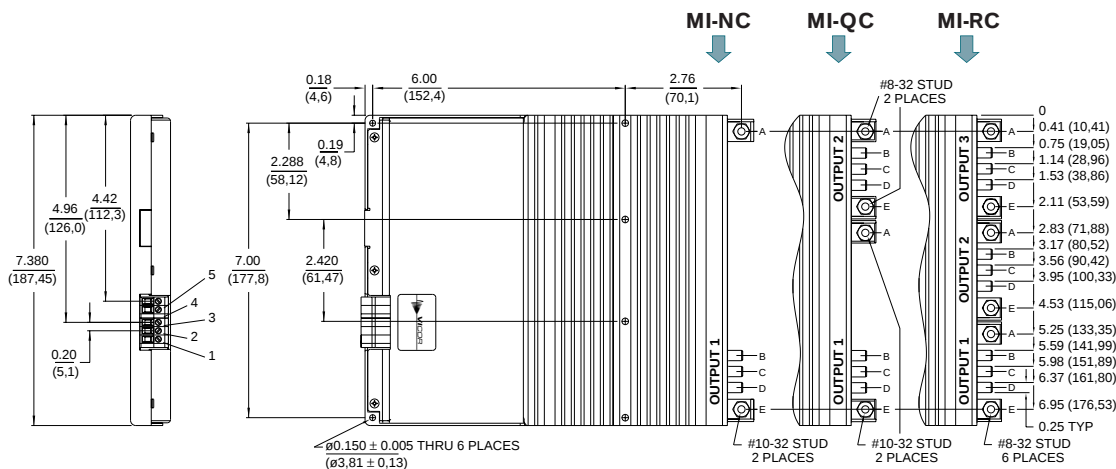

#### Inputs

- 1 -Ground
- 2 -Input
- 3 +Input
- 4 Disable-
- 5 Disable+

#### Outputs

- |           |           |           |
|-----------|-----------|-----------|
| Output #1 | Output #2 | Output #3 |
| A +Output | A +Output | A +Output |
| B +Sense  | B +Sense  | B +Sense  |
| C Trim    | C Trim    | C Trim    |
| D -Sense  | D -Sense  | D -Sense  |
| E -Output | E -Output | E -Output |