

A new series of easy-to-use models for standard- and double-distance

- Stainless steel and brass housing
- Two housing length for each type
- Pre-wired and Plug-in connector types
- Short-circuit protection and reverse polarity protection



Sensor 500 Ordering Information

Note: The tables below contain part numbers for those Proximity Sensors involved in the Sensor 500 Program only. A complete listing of all E2EL part numbers can be found on the following pages.

■ CABLE TYPES

Brass housing

| Item | | | | Part numbers | | | |
|----------|--------|--------------|------------------|--------------|-------------|-------------|-------------|
| Diameter | Length | Mounting | Sensing Distance | Output | | | |
| | | | | NPN/NO | NPN/NC | PNP/NO | PNP/NC |
| ∅6.5 | 30 mm | Shielded | 1.5 mm | E2EL-C1R5E1 | E2EL-C1R5E2 | E2EL-C1R5F1 | E2EL-C1R5F2 |
| | 32 mm | Non-shielded | 2.0 mm | E2EL-C2ME1 | E2EL-C2ME2 | E2EL-C2MF1 | E2EL-C2MF2 |
| M8 | 30 mm | Shielded | 1.5 mm | E2EL-X1R5E1 | E2EL-X1R5E2 | E2EL-X1R5F1 | E2EL-X1R5F2 |
| | 32 mm | Non-shielded | 2.0 mm | E2EL-X2ME1 | E2EL-X2ME2 | E2EL-X2MF1 | E2EL-X2MF2 |
| M12 | 41 mm | Shielded | 2.0 mm | E2EL-X2E1 | E2EL-X2E2 | E2EL-X2F1 | E2EL-X2F2 |
| | | Non-shielded | 4.0 mm | E2EL-X4ME1 | E2EL-X4ME2 | E2EL-X4MF1 | E2EL-X4MF2 |
| M18 | 40 mm | Shielded | 5.0 mm | E2EL-X5E1 | E2EL-X5E2 | E2EL-X5F1 | E2EL-X5F2 |
| | | Non-shielded | 8.0 mm | E2EL-X8ME1 | E2EL-X8ME2 | E2EL-X8MF1 | E2EL-X8MF2 |

■ PLUG TYPES

Brass housing

| Item | | | | Part numbers | | | |
|---------------------|--------|--------------|------------------|----------------|----------------|----------------|----------------|
| Diameter/Connection | Length | Mounting | Sensing Distance | Output | | | |
| | | | | NPN / NO | NPN / NC | PNP / NO | PNP / NC |
| ∅6.5/Plug M8 | 45 mm | Shielded | 1.5 mm | E2EL-C1R5E1-M3 | E2EL-C1R5E2-M3 | E2EL-C1R5F1-M3 | E2EL-C1R5F2-M3 |
| | 47 mm | Non-shielded | 2.0 mm | E2EL-C2ME1-M3 | E2EL-C2ME2-M3 | E2EL-C2MF1-M3 | E2EL-C2MF2-M3 |
| M8/Plug M8 | 45 mm | Shielded | 1.5 mm | E2EL-X1R5E1-M3 | E2EL-X1R5E2-M3 | E2EL-X1R5F1-M3 | E2EL-X1R5F2-M3 |
| | 47 mm | Non-shielded | 2.0 mm | E2EL-X2ME1-M3 | E2EL-X2ME2-M3 | E2EL-X2MF1-M3 | E2EL-X2MF2-M3 |
| M12/Plug M12 | 49 mm | Shielded | 2.0 mm | E2EL-X2E1-M1 | E2EL-X2E2-M1 | E2EL-X2F1-M1 | E2EL-X2F2-M1 |
| | | Non-shielded | 4.0 mm | E2EL-X4ME1-M1 | E2EL-X4ME2-M1 | E2EL-X4MF1-M1 | E2EL-X4MF2-M1 |
| M18/Plug M12 | 53 mm | Shielded | 5.0 mm | E2EL-X5E1-M1 | E2EL-X5E2-M1 | E2EL-X5F1-M1 | E2EL-X5F2-M1 |
| | | Non-shielded | 8.0 mm | E2EL-X8ME1-M1 | E2EL-X8ME2-M1 | E2EL-X8MF1-M1 | E2EL-X8MF2-M1 |

Ordering Information

Note: The tables below contain a complete listing of all E2EL part numbers. For information on Proximity Sensors involved in the **Sensor 500** Program refer to the previous page.

■ CABLE TYPES

Brass housing

| Item | | | | Part numbers | | | |
|----------|--------|--------------|------------------|---------------|---------------|---------------|---------------|
| Diameter | Length | Mounting | Sensing Distance | Output | | | |
| | | | | NPN/NO | NPN/NC | PNP/NO | PNP/NC |
| Ø6.5 | 30 mm | Shielded | 1.5 mm | E2EL-C1R5E1 | E2EL-C1R5E2 | E2EL-C1R5F1 | E2EL-C1R5F2 |
| | 32 mm | Non-shielded | 2.0 mm | E2EL-C2ME1 | E2EL-C2ME2 | E2EL-C2MF1 | E2EL-C2MF2 |
| | 45 mm | Shielded | 1.5 mm | E2EL-C1R5E1-L | E2EL-C1R5E2-L | E2EL-C1R5F1-L | E2EL-C1R5F2-L |
| | 47 mm | Non-shielded | 2.0 mm | E2EL-C2ME1-L | E2EL-C2ME2-L | E2EL-C2MF1-L | E2EL-C2MF2-L |
| M8 | 30 mm | Shielded | 1.5 mm | E2EL-X1R5E1 | E2EL-X1R5E2 | E2EL-X1R5F1 | E2EL-X1R5F2 |
| | 32 mm | Non-shielded | 2.0 mm | E2EL-X2ME1 | E2EL-X2ME2 | E2EL-X2MF1 | E2EL-X2MF2 |
| | 45 mm | Shielded | 1.5 mm | E2EL-X1R5E1-L | E2EL-X1R5E2-L | E2EL-X1R5F1-L | E2EL-X1R5F2-L |
| | 47 mm | Non-shielded | 2.0 mm | E2EL-X2ME1-L | E2EL-X2ME2-L | E2EL-X2MF1-L | E2EL-X2MF2-L |
| M12 | 41 mm | Shielded | 2.0 mm | E2EL-X2E1 | E2EL-X2E2 | E2EL-X2F1 | E2EL-X2F2 |
| | | Shielded | 4.0 mm | E2EL-X4E1-D | E2EL-X4E2-D | E2EL-X4F1-D | E2EL-X4F2-D |
| | | Non-shielded | 4.0 mm | E2EL-X4ME1 | E2EL-X4ME2 | E2EL-X4MF1 | E2EL-X4MF2 |
| | 53 mm | Shielded | 2.0 mm | E2EL-X2E1-L | E2EL-X2E2-L | E2EL-X2F1-L | E2EL-X2F2-L |
| | | Shielded | 4.0 mm | E2EL-X4E1-DL | E2EL-X4E2-DL | E2EL-X4F1-DL | E2EL-X4F2-DL |
| | | Non-shielded | 4.0 mm | E2EL-X4ME1-L | E2EL-X4ME2-L | E2EL-X4MF1-L | E2EL-X4MF2-L |
| M18 | 40 mm | Shielded | 5.0 mm | E2EL-X5E1 | E2EL-X5E2 | E2EL-X5F1 | E2EL-X5F2 |
| | | Shielded | 8.0 mm | E2EL-X8E1-D | E2EL-X8E2-D | E2EL-X8F1-D | E2EL-X8F2-D |
| | | Non-shielded | 8.0 mm | E2EL-X8ME1 | E2EL-X8ME2 | E2EL-X8MF1 | E2EL-X8MF2 |
| | 73 mm | Shielded | 5.0 mm | E2EL-X5E1-L | E2EL-X5E2-L | E2EL-X5F1-L | E2EL-X5F2-L |
| | | Shielded | 8.0 mm | E2EL-X8E1-DL | E2EL-X8E2-DL | E2EL-X8F1-DL | E2EL-X8F2-DL |
| | | Non-shielded | 8.0 mm | E2EL-X8ME1-L | E2EL-X8ME2-L | E2EL-X8MF1-L | E2EL-X8MF2-L |
| M30 | 40 mm | Shielded | 10.0 mm | E2EL-X10E1 | E2EL-X10E2 | E2EL-X10F1 | E2EL-X10F2 |
| | | Non-shielded | 15.0 mm | E2EL-X15ME1 | E2EL-X15ME2 | E2EL-X15MF1 | E2EL-X15MF2 |
| | 80 mm | Shielded | 10.0 mm | E2EL-X10E1-L | E2EL-X10E2-L | E2EL-X10F1-L | E2EL-X10F2-L |
| | | Non-shielded | 15.0 mm | E2EL-X15ME1-L | E2EL-X15ME2-L | E2EL-X15MF1-L | E2EL-X15MF2-L |

Stainless steel housing

| Item | | | | Part numbers | | | |
|----------|--------|----------|------------------|---------------|---------------|---------------|---------------|
| Diameter | Length | Mounting | Sensing Distance | Output | | | |
| | | | | NPN/NO | NPN/NC | PNP/NO | PNP/NC |
| Ø6.5 | 30 mm | Shielded | 2.0 mm | E2EL-C2E1-DS | E2EL-C2E2-DS | E2EL-C2F1-DS | E2EL-C2F2-DS |
| | 45 mm | Shielded | 2.0 mm | E2EL-C2E1-DSL | E2EL-C2E2-DSL | E2EL-C2F1-DSL | E2EL-C2F2-DSL |
| M8 | 30 mm | Shielded | 2.0 mm | E2EL-X2E1-DS | E2EL-X2E2-DS | E2EL-X2F1-DS | E2EL-X2F2-DS |
| | 45 mm | Shielded | 2.0 mm | E2EL-X2E1-DSL | E2EL-X2E2-DSL | E2EL-X2F1-DSL | E2EL-X2F2-DSL |
| M12 | 41 mm | Shielded | 4.0 mm | E2EL-X4E1-DS | E2EL-X4E2-DS | E2EL-X4F1-DS | E2EL-X4F2-DS |
| | 53 mm | Shielded | 4.0 mm | E2EL-X4E1-DSL | E2EL-X4E2-DSL | E2EL-X4F1-DSL | E2EL-X4F2-DSL |
| M18 | 40 mm | Shielded | 8.0 mm | E2EL-X8E1-DS | E2EL-X8E2-DS | E2EL-X8F1-DS | E2EL-X8F2-DS |
| | 73 mm | Shielded | 8.0 mm | E2EL-X8E1-DSL | E2EL-X8E2-DSL | E2EL-X8F1-DSL | E2EL-X8F2-DSL |

■ PLUG TYPES

Brass housing

| Item | | | | Part numbers | | | |
|-------------------------|--------|--------------|---------------------|-----------------|-----------------|-----------------|-----------------|
| Diameter/ Connection | Length | Mounting | Sensing Distance | Output | | | |
| | | | | NPN / NO | NPN / NC | PNP / NO | PNP / NC |
| ∅6.5/Plug M8 | 45 mm | Shielded | 1.5 mm | E2EL-C1R5E1-M3 | E2EL-C1R5E2-M3 | E2EL-C1R5F1-M3 | E2EL-C1R5F2-M3 |
| | 47 mm | Non-shielded | 2.0 mm | E2EL-C2ME1-M3 | E2EL-C2ME2-M3 | E2EL-C2MF1-M3 | E2EL-C2MF2-M3 |
| | 54 mm | Shielded | 1.5 mm | E2EL-C1R5E1-M3L | E2EL-C1R5E2-M3L | E2EL-C1R5F1-M3L | E2EL-C1R5F2-M3L |
| | 56 mm | Non-shielded | 2.0 mm | E2EL-C2ME1-M3L | E2EL-C2ME2-M3L | E2EL-C2MF1-M3L | E2EL-C2MF2-M3L |
| M8/Plug M8 | 45 mm | Shielded | 1.5 mm | E2EL-X1R5E1-M3 | E2EL-X1R5E2-M3 | E2EL-X1R5F1-M3 | E2EL-X1R5F2-M3 |
| | 47 mm | Non-shielded | 2.0 mm | E2EL-X2ME1-M3 | E2EL-X2ME2-M3 | E2EL-X2MF1-M3 | E2EL-X2MF2-M3 |
| | 54 mm | Shielded | 1.5 mm | E2EL-X1R5E1-M3L | E2EL-X1R5E2-M3L | E2EL-X1R5F1-M3L | E2EL-X1R5F2-M3L |
| | 56 mm | Non-shielded | 2.0 mm | E2EL-X2ME1-M3L | E2EL-X2ME2-M3L | E2EL-X2MF1-M3L | E2EL-X2MF2-M3L |
| M8/Plug M12 | 44 mm | Shielded | 1.5 mm | E2EL-X1R5E1-M1 | E2EL-X1R5E2-M1 | E2EL-X1R5F1-M1 | E2EL-X1R5F2-M1 |
| | 46 mm | Non-shielded | 2.0 mm | E2EL-X2ME1-M1 | E2EL-X2ME2-M1 | E2EL-X2MF1-M1 | E2EL-X2MF2-M1 |
| | 60 mm | Shielded | 1.5 mm | E2EL-X1R5E1-M1L | E2EL-X1R5E2-M1L | E2EL-X1R5F1-M1L | E2EL-X1R5F2-M1L |
| | 62 mm | Non-shielded | 2.0 mm | E2EL-X2ME1-M1L | E2EL-X2ME2-M1L | E2EL-X2MF1-M1L | E2EL-X2MF2-M1L |
| M12/Plug M12 | 49 mm | Shielded | 2.0 mm | E2EL-X2E1-M1 | E2EL-X2E2-M1 | E2EL-X2F1-M1 | E2EL-X2F2-M1 |
| | | Shielded | 4.0 mm | E2EL-X4E1-DM1 | E2EL-X4E2-DM1 | E2EL-X4F1-DM1 | E2EL-X4F2-DM1 |
| | | Non-shielded | 4.0 mm | E2EL-X4ME1-M1 | E2EL-X4ME2-M1 | E2EL-X4MF1-M1 | E2EL-X4MF2-M1 |
| | 60 mm | Shielded | 2.0 mm | E2EL-X2E1-M1L | E2EL-X2E2-M1L | E2EL-X2F1-M1L | E2EL-X2F2-M1L |
| | | Shielded | 4.0 mm | E2EL-X4E1-DM1L | E2EL-X4E2-DM1L | E2EL-X4F1-DM1L | E2EL-X4F2-DM1L |
| | | Non-shielded | 4.0 mm | E2EL-X4ME1-M1L | E2EL-X4ME2-M1L | E2EL-X4MF1-M1L | E2EL-X4MF2-M1L |
| M18/Plug M12 | 53 mm | Shielded | 5.0 mm | E2EL-X5E1-M1 | E2EL-X5E2-M1 | E2EL-X5F1-M1 | E2EL-X5F2-M1 |
| | | Shielded | 8.0 mm | E2EL-X8E1-DM1 | E2EL-X8E2-DM1 | E2EL-X8F1-DM1 | E2EL-X8F2-DM1 |
| | | Non-shielded | 8.0 mm | E2EL-X8ME1-M1 | E2EL-X8ME2-M1 | E2EL-X8MF1-M1 | E2EL-X8MF2-M1 |
| | 80 mm | Shielded | 5.0 mm | E2EL-X5E1-M1L | E2EL-X5E2-M1L | E2EL-X5F1-M1L | E2EL-X5F2-M1L |
| | | Shielded | 8.0 mm | E2EL-X8E1-DM1L | E2EL-X8E2-DM1L | E2EL-X8F1-DM1L | E2EL-X8F2-DM1L |
| | | Non-shielded | 8.0 mm | E2EL-X8ME1-M1L | E2EL-X8ME2-M1L | E2EL-X8MF1-M1L | E2EL-X8MF2-M1L |
| M30/Plug M12 | 55 mm | Shielded | 10.0 mm | E2EL-X10E1-M1 | E2EL-X10E2-M1 | E2EL-X10F1-M1 | E2EL-X10F2-M1 |
| | | Non-shielded | 15.0 mm | E2EL-X15ME1-M1 | E2EL-X15ME2-M1 | E2EL-X15MF1-M1 | E2EL-X15MF2-M1 |
| | 80 mm | Shielded | 10.0 mm | E2EL-X10E1-M1L | E2EL-X10E2-M1L | E2EL-X10F1-M1L | E2EL-X10F2-M1L |
| | | Non-shielded | 15.0 mm | E2EL-X15ME1-M1L | E2EL-X15ME2-M1L | E2EL-X15MF1-M1L | E2EL-X15MF2-M1L |

Stainless steel housing

| Item | | | | Part numbers | | | |
|-------------------------|--------|----------|---------------------|-----------------|-----------------|-----------------|-----------------|
| Diameter/ Connection | Length | Mounting | Sensing Distance | Output | | | |
| | | | | NPN / NO | NPN / NC | PNP / NO | PNP / NC |
| M8/Plug M8 | 54 mm | Shielded | 2.0 mm | E2EL-X2E1-DM3SL | E2EL-X2E2-DM3SL | E2EL-X2F1-DM3SL | E2EL-X2F2-DM3SL |
| M12/Plug M12 | 49 mm | Shielded | 4.0 mm | E2EL-X4E1-DM1S | E2EL-X4E2-DM1S | E2EL-X4F1-DM1S | E2EL-X4F2-DM1S |
| | | Shielded | 4.0 mm | E2EL-X4E1-DM1SL | E2EL-X4E2-DM1SL | E2EL-X4F1-DM1SL | E2EL-X4F2-DM1SL |
| M18/Plug M12 | 53 mm | Shielded | 8.0 mm | E2EL-X8E1-DM1S | E2EL-X8E2-DM1S | E2EL-X8F1-DM1S | E2EL-X8F2-DM1S |
| | | Shielded | 8.0 mm | E2EL-X8E1-DM1SL | E2EL-X8E2-DM1SL | E2EL-X8F1-DM1SL | E2EL-X8F2-DM1SL |

Specifications

■ BRASS TYPE

| Type | Ø6.5 | | M8 | | M12 | | | M18 | | | M30 | | |
|---|---|--|-------|---------------------|---------|---|-----|---------|---------|---------------------------------------|---------|---------|--|
| Operating voltage | 10 to 35 VDC | | | | | | | | | | | | |
| Rated supply voltage | 24 VDC | | | | | | | | | | | | |
| Current consumption | max. 15 mA at 24 VDC | | | | | | | | | | | | |
| Sensing object | Ferrous metals | | | | | | | | | | | | |
| Mounting ((s)hielded, (n)on-shielded) (see note) | s | n | s | n | s | s | n | s | s | n | s | n | |
| Operating distance in mm | 1.5 | 2.0 | 1.5 | 2.0 | 2.0 | 4.0 | 4.0 | 5.0 | 8.0 | 8.0 | 10.0 | 15.0 | |
| Tolerance of operating distance | ±10% | | | | | | | | | | | | |
| Standard target size in mm (L x W x H in mm, FE 37) | 6.5x6.5x1 | | 8x8x1 | | 12x12x1 | | | 18x18x1 | 24x24x1 | | 30x30x1 | 45x45x1 | |
| Differential travel | 1 % ... 15 % of operating distance | | | | | | | | | | | | |
| Max. response frequency in kHz | 5.0 | | 5.0 | | 2.0 | 0.6 | 1.0 | 0.5 | 0.3 | 0.5 | 0.25 | 0.15 | |
| Control output | Type | E2EL- ... E1 type: NPN-NO E2 type: NPN-NC F1 type: PNP-NO F2 type: PNP-NC | | | | | | | | | | | |
| | Max-Load | 200 mA | | | | | | | | | | | |
| | Max-on-state Voltage drop | 2.5 VDC (at 200mA load current and with 2 m cable) | | | | | | | | | | | |
| Circuit protection | Reverse polarity, output short-circuit | | | | | | | | | | | | |
| Indicator | Operating indicator (yellow LED) | | | | | | | | | | | | |
| Ambient temperature | Operating: -25° to 70°C | | | | | | | | | | | | |
| Humidity | 35 to 95 % RH | | | | | | | | | | | | |
| Influence of temperature | ± 10 % max. of Sn at 23°C in temperature range of -25° to 70°C | | | | | | | | | | | | |
| Dielectric strength | 1,500 VAC, 50/60 Hz for 1 min. between current carry parts and case | | | | | | | | | | | | |
| Electromagnetic compatibility EMC | EN 60947-5-2 | | | | | | | | | | | | |
| Vibration resistance | 10 to 70 Hz, 1.5 mm double amplitude for 1 hour each in X, Y and Z directions | | | | | | | | | | | | |
| Shock resistance | 300 m/s ² (approx. 30 G) for 6 times each in X, Y and Z directions | | | | | | | | | | | | |
| Enclosure rating | IP 67 (EN 60947-1) | | | | | | | | | | | | |
| Connection | Pre-wired | 2 m PVC-cable, 3 x 0.14 mm ² | | | | 2 m PVC-cable, 3 x 0.25 mm ² | | | | 2m PVC-cable, 3 x 0.5 mm ² | | | |
| | Connector | M8 plug | | M8 plug M12 plug | | M12 plug | | | | | | | |
| Weight in g | Pre-wired | long | 45 | 50 | 75 | | | 115 | | | 260 | | |
| | | short | 43 | 48 | 70 | | | 100 | | | 200 | | |
| | Connector | long | 10 | 15 | 25 | | | 60 | | | 155 | | |
| | | short | 8 | 13 | 20 | | | 50 | | | 110 | | |
| Material | Case | Brass | | | | | | | | | | | |
| | Sensing face | PBTP | | | | | | | | | | | |

Note: For detailed mounting instruction please refer to *Installation* section.


■ STAINLESS STEEL TYPE

| Type | Ø6.5 | | M8 | | M12 | | M18 | | |
|--|--|--|-------|---------|---------|---|---------|--|--|
| Operating voltage | 10 to 35 VDC | | | | | | | | |
| Rated supply voltage | 24 VDC | | | | | | | | |
| Current consumption | max. 15 mA at 24 VDC | | | | | | | | |
| Mounting (see note) | Shielded | | | | | | | | |
| Sensing object | Ferrous metals | | | | | | | | |
| Operating distance in mm | 2.0 | | 2.0 | | 4.0 | | 8.0 | | |
| Tolerance of operating distance | ±10% | | | | | | | | |
| Standard target size (L x W x H in mm, FE 37) | 6.5x6.5x1 | | 8x8x1 | | 12x12x1 | | 24x24x1 | | |
| Differential travel | 1 % ... 15 % of operating distance | | | | | | | | |
| Max. response frequency in kHz | 4.0 | | 4.0 | | 0.6 | | 0.25 | | |
| Control output | Type | E2EL- ... E1 type: NPN-NO E2 type: NPN-NC F1 type: PNP-NO F2 type: PNP-NC | | | | | | | |
| | Max-Load | 200 mA | | | | | | | |
| | Max-on-state Voltage drop | 2.5 VDC (at 200mA load current and with 2 m cable) | | | | | | | |
| Circuit protection | Reverse polarity, output short-circuit | | | | | | | | |
| Indicator | Operating indicator (yellow LED) | | | | | | | | |
| Ambient temperature | Operating: -25° to 70°C | | | | | | | | |
| Humidity | 35 to 95 % RH | | | | | | | | |
| Influence of temperature | ± 10 % max. of Sn at 23°C in temperature range of -25° to 70°C | | | | | | | | |
| Dielectric strength | 1,500 VAC, 50/60 Hz for 1 min. between current carry parts and case | | | | | | | | |
| Electromagnetic compatibility EMC | EN 60947-5-2 | | | | | | | | |
| Vibration resistance | Destruction: 10 to 70 Hz, 1.5 mm double amplitude for 1 hour each in X, Y and Z directions | | | | | | | | |
| Shock resistance | Destruction: 300 m/s ² (approx. 30 G) for 6 times each in X, Y and Z directions | | | | | | | | |
| Enclosure rating | IP 67 (EN 60947-1) | | | | | | | | |
| Connection | Pre-wired | 2 m PVC-cable, 3 x 0.14 mm ² | | | | 2 m PVC-cable, 3 x 0.25 mm ² | | | |
| | Connector | - | | M8 plug | | M12 plug | | | |
| Weight in g | Pre-wired | long | 45 | 50 | 75 | 120 | | | |
| | | short | 43 | 48 | 70 | 105 | | | |
| | Connector | long | - | 10 | 25 | 65 | | | |
| | | short | - | - | 20 | 55 | | | |
| Material | Case | stainless steel 1.4305 / AISI 303 | | | | | | | |
| | Sensing face | PBTP | | | | | | | |

Note: For detailed mounting instruction please refer to *Installation* Section.


Engineering Data

STANDARDIZED CHARACTERISTIC FOR LATERAL APPROACH

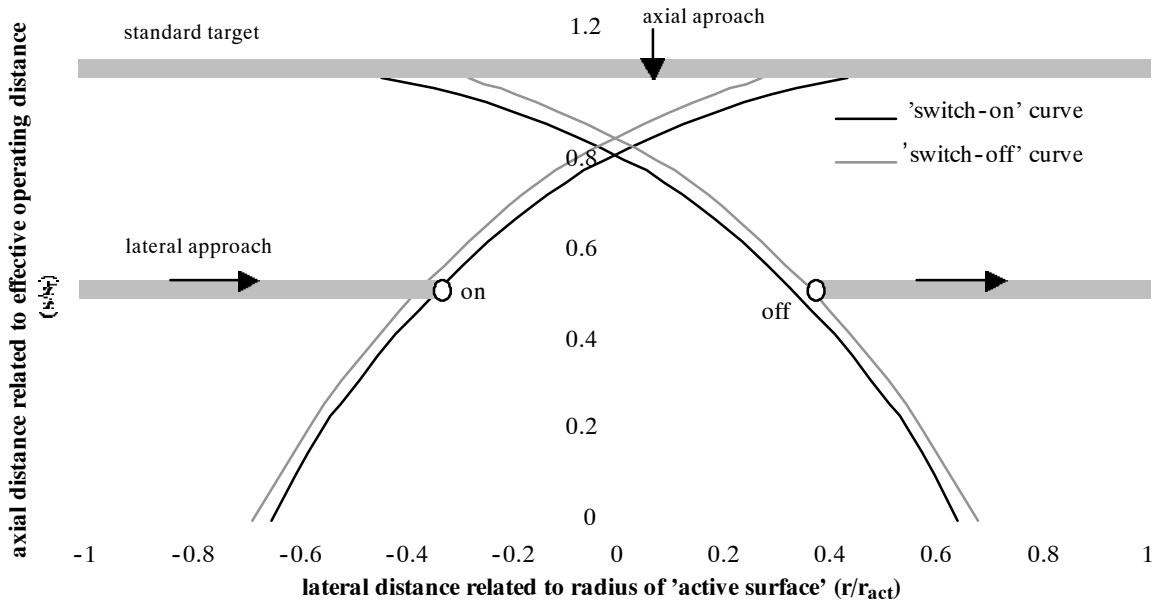


OUTPUT CIRCUIT DIAGRAM AND TIMING CHART

E2EL-X□E□
NPN Output

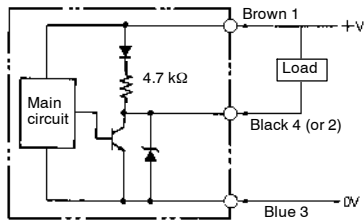

E2EL-X□F□
PNP Output

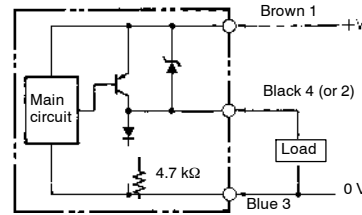

E2EL-X□E□
NPN Output


| | NO | NC |
|------------------|-----|---------|
| Sensing object | Yes | No |
| Yellow indicator | Lit | Not lit |
| Control output | ON | OFF |

E2EL-X□F□
PNP Output

| | NO | NC |
|------------------|-----|---------|
| Sensing object | Yes | No |
| Yellow indicator | Lit | Not lit |
| Control output | ON | OFF |


PIN ARRANGEMENT AT CONNECTOR TYPES

1. Connector M8 (viewed to plug pins)




2. Connector M12 (viewed to plug pins)

NO

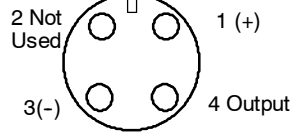

NC

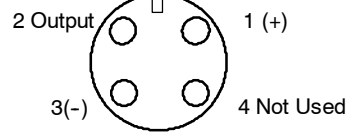


Dimensions

- Note:**
- All units are in millimeters unless otherwise indicated.
 - Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions. Values in parentheses () are cumulative values and may exceed tolerance of ± 0.4 mm.
 - The square \square in the models represents the output configuration. Refer to *Ordering Information*.

Cable Types


E2EL- C1 \square R5 2M, E2EL- C2 \square - DS

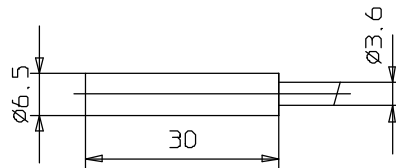


E2EL- C2M \square




E2EL- C1R5 \square - L 2M, E2EL- C2 \square - DSL

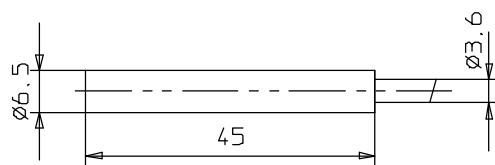


E2EL- C2M \square - L

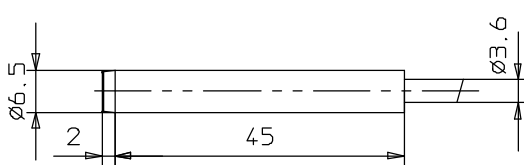


E2EL- X1R5 \square 2M, E2EL- X2 \square - DS

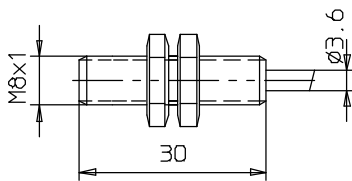


E2EL- X2M \square

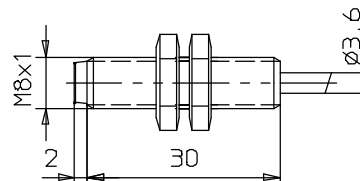


E2EL- X1R5 \square - L 2M, E2EL- X2 \square - DSL

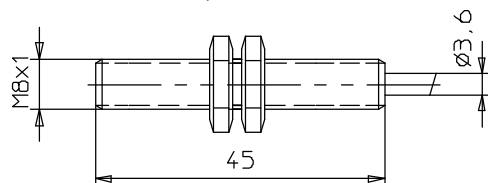


E2EL- X2M \square - L

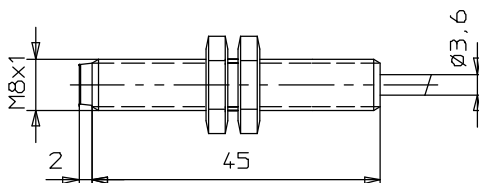


E2EL-X2□ 2M, E2EL-X4□-D 2M, E2EL-X4□-DS

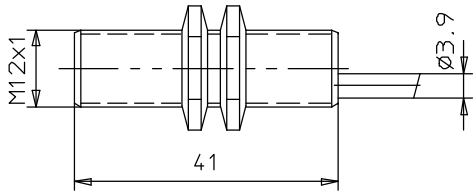


E2EL-X4M□

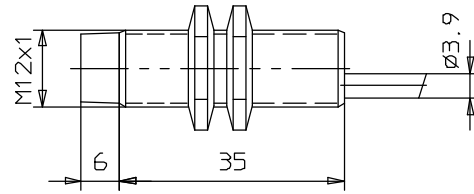


E2EL-X2□-L 2M, E2EL-X4□-DL 2M, E2EL-X4□-DSL

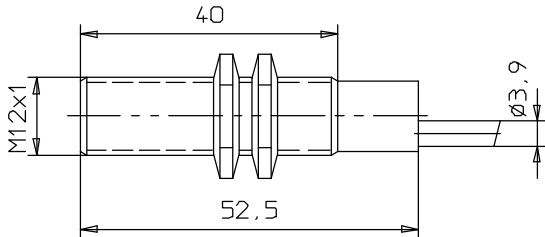


E2EL-X4M□-L

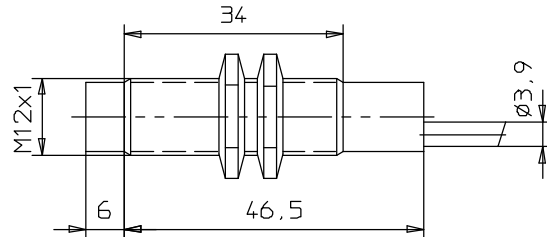


E2EL-X5□ 2M, E2EL-X8□-D 2M, E2EL-X8□-DS

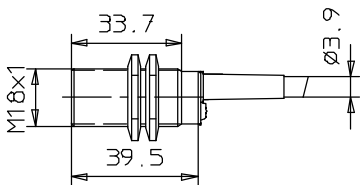


E2EL-X8M□

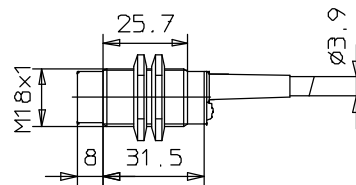


E2EL-X5□-L 2M, E2EL-X8□-DL 2M, E2EL-X8□-DSL

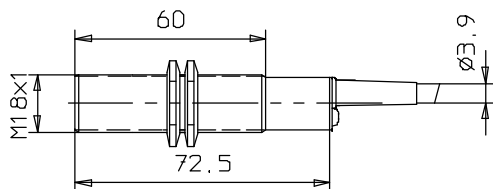


E2EL-X8M□-L

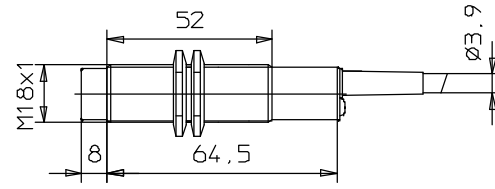


E2EL-X10□

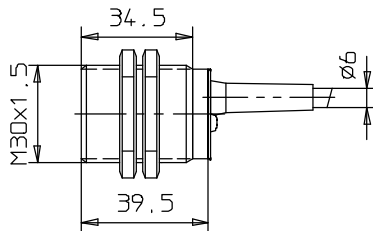


E2EL-X15M□

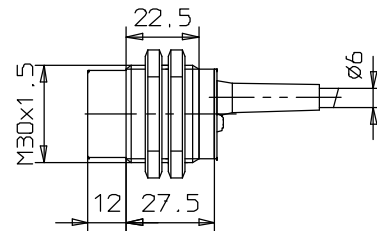

E2EL-X10□-L

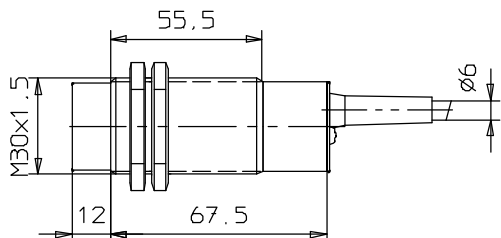


E2EL-X15M□-L

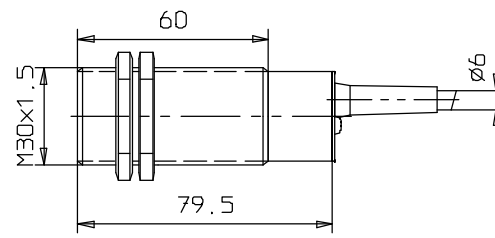


Plug Types


E2EL-C1R5□-M3

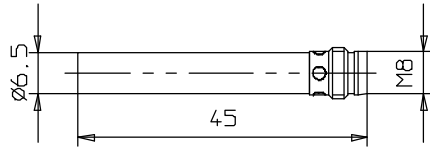


E2EL-C2M□-M3

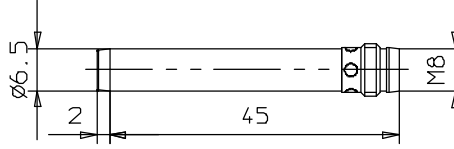


E2EL-C1R5□-M3L

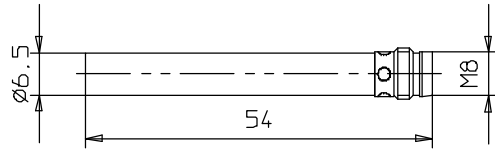


E2EL-C2M□-M3L

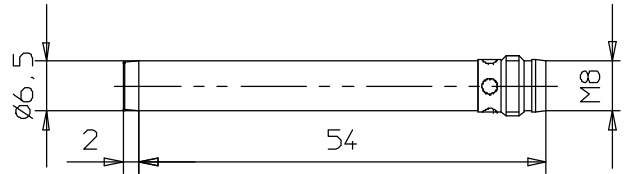


E2EL-X1R5□-M3

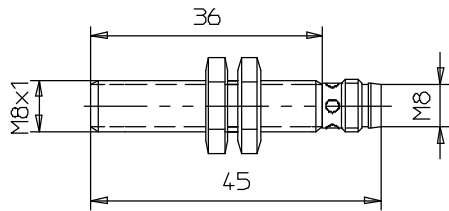


E2EL-X2M□-M3

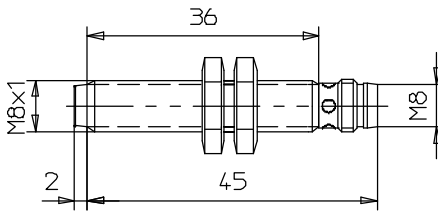


E2EL-X1R5□-M3L, E2EL-X2□DM3S

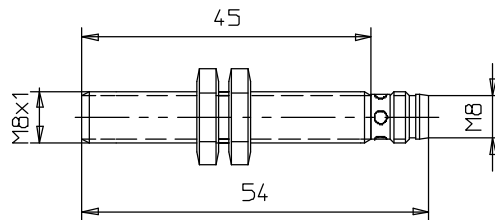


E2EL-X2M□-M3L

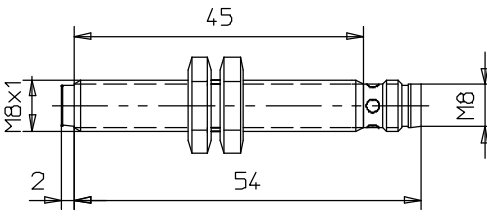


E2EL-X1R5□-M1

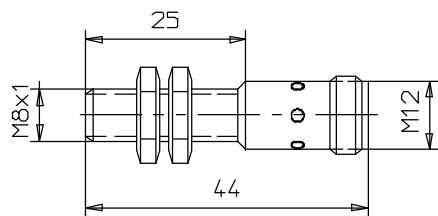


E2EL-X2M□-M1

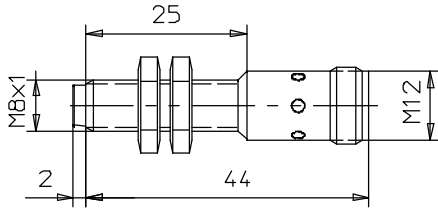


E2EL-X1R5□-M1L

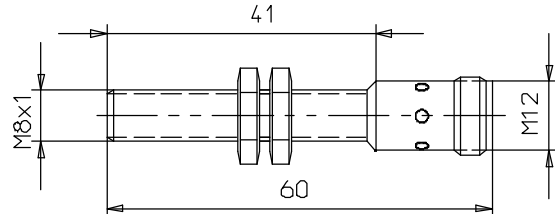


E2EL-X2M□-M1L

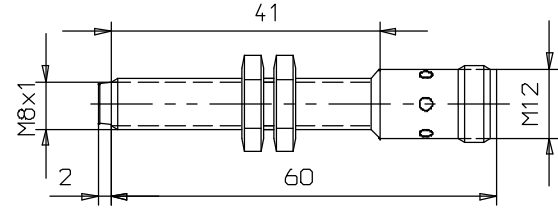


E2EL-X2□-M1, E2EL-X4□-DM1, E2EL-X4□-DM1S

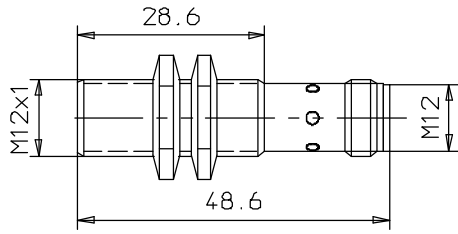


E2EL-X4M□-M1

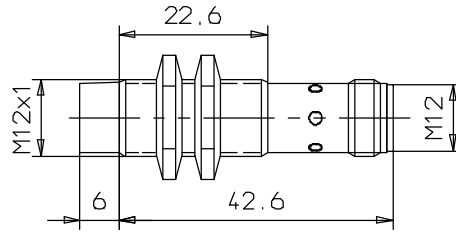


E2EL-X2□-M1L, E2EL-X4□-DM1L, E2EL-X4□-DM1SL

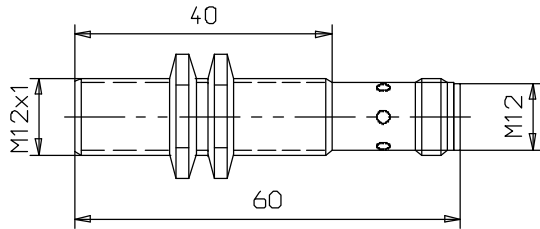


E2EL-X4M□-M1L

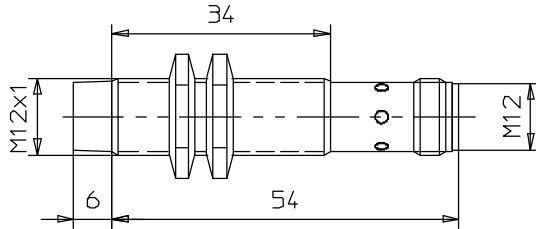


E2EL-X5□-M1, E2EL-X8□-DM1, E2EL-X8□-DM1S




E2EL-X8M□-M1

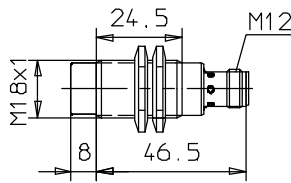


E2EL-X5□-M1L, E2EL-X8□-DM1L, E2EL-X8□-DM1SL

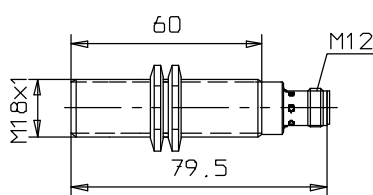


E2EL-X8M□-M1L

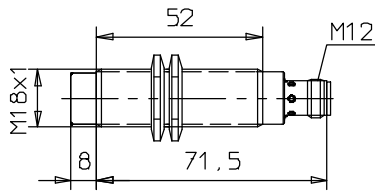


E2EL-X10□-M1

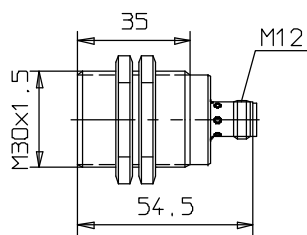


E2EL-X15M□-M1



E2EL-X10□-M1L

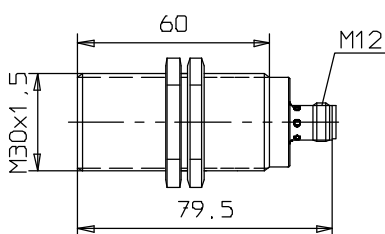

E2EL-X15M□-M1L

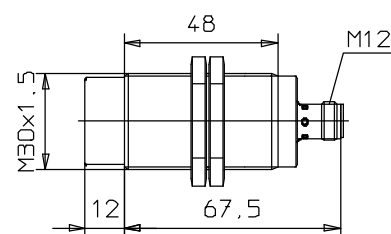

Installation

■ CAUTION

| Item | Examples |
|---|----------|
| Power Supply Do not impose an excessive voltage on the E2EL, otherwise it may explode or burn. Do not impose 24 VAC on any E2EL model, otherwise it may explode or burn. | |
| Load short-circuit Do not short-circuit the load, or the E2EL may explode or burn. The E2EL's short-circuit protection function is valid, if the polarity of the supply voltage imposed is incorrect and within the rated voltage range. | |
| Wiring Be sure to wire the E2EL and load correctly, otherwise it may explode or burn. | |

■ CORRECT USE

Installation

Power Reset Time

The Proximity Sensor is ready to operate within 100 ms after power is supplied. If power supplies are connected to the Proximity Sensor and load respectively, be sure to supply power to the Proximity Sensor before supplying power to the load.

Power OFF

The Proximity Sensor may output a pulse signal when it is turned off. Therefore, it is recommended to turn off the load before turning off the Proximity Sensor.

Power Supply Transformer

When using a DC power supply, make sure that the DC power supply has an insulated transformer. Do not use a DC power supply with an auto-transformer.

Sensing Object

Metal Coating:

The sensing distance of the Proximity Sensor vary with the metal coating on sensing objects.

Wiring

High-tension Lines

Wiring through Metal Conduit

If there a power or high-tension line near the cord of the Proximity Sensor, wire the cord through an independent metal conduit to prevent against Proximity Sensor damage or malfunctioning.

Core Tractive Force

Do not pull cords with the tractive force exceeding the following:
 pull force (N) = 20 x cable diameter (mm)

Mounting

The Proximity Sensor must not be subjected to excessive shock with a hammer when it is installed, otherwise the Proximity Sensor may be damaged or lose the water-resistivity.

Environment

Water- Resistivity

Do not use the Proximity Sensor underwater, outdoors or in the rain.

Operating Environment

Be sure to use the Proximity Sensor within operating ambient temperature range and do not use the Proximity Sensor outdoors so that its reliability and life expectancy can be maintained. Although the Proximity Sensor is water resistive, a cover to protect the Proximity Sensor from water or soluble machining oil is recommended so that its reliability and life expectancy can be maintained. Do not use the Proximity Sensor in an environment with chemical gas (e. G., strong alkaline or acid gases including nitric, chromic, and concentrated sulfuric acid gases).

| Item | Examples | Item |
|-----------------------------|---|--|
| AND (serial connection) | <p style="text-align: center;">Correct</p> | <p>The Sensors connected together must satisfy the following conditions:</p> $i_L + (N-1) \times i = \text{Upper-limit of control output of each Sensor}$ $V_S - N \times V_R = \text{Load operating voltage}$ <p> $N =$ No. of Sensors $V_R =$ Residual voltage of each Sensor $V_S =$ Supply voltage $i =$ Current consumption of the Sensor $i_L =$ Load current </p> <p>If the MY Relay, which operate at 24 VDC, is used as a load for example, a maximum of two Proximity Sensors can be connected to the load.</p> |
| OR (parallel connection) | <p style="text-align: center;">Correct</p> | <p>The number of Sensors connected in parallel varies with the Proximity Sensor model.</p> |

Effects of Surrounding Metal

Shielded types

Shielded types allow direct installation on metal plates in an embedded manner without performance change. A minimum distance of $3s_n$ is required between the active surface and a metallic surface in front of the device. (Fig. 1).

For SUS shielded types the following minimum distances are required to avoid performance change (see Fig.2 and table below):

| Shielded SUS Types | Free zone |
|--------------------|-----------|
| E2EL-C2□-DS | 0.5 mm |
| E2EL-X2□-DS | 0.5 mm |
| E2EL-X4□-D□S | 1.0 mm |
| E2EL-X8□-D□S | 2.0 mm |

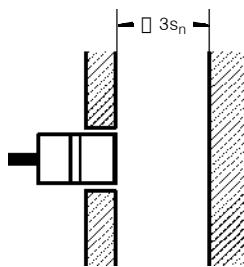


Fig.1: Shielded type (except SUS)




Fig.2: Shielded SUS type

Non-shielded types

Installation of non-shielded types in metal require the minimum distances according to Fig. 3.

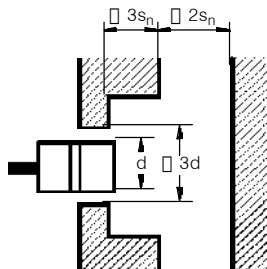


Fig.3: Non-shielded type

NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.

OMRON[®]

OMRON ELECTRONICS LLC

One East Commerce Drive
Schaumburg, IL 60173

1-800-55-OMRON

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.omron.com/oei>
Canada - <http://www.omron.com/oci>

OMRON CANADA, INC.

885 Milner Avenue
Scarborough, Ontario M1B 5V8

416-286-6465