



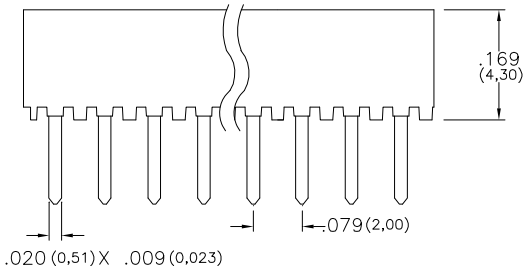
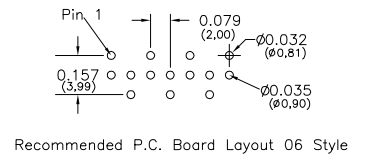



# Major League Electronics .079 cl Box Contact Socket Strip

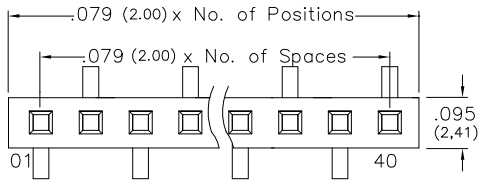

(-02) TOP ENTRY

(-06) DUAL ENTRY

Tails may be clipped to achieve desired pin length

## Ordering Information

BCSS-2  - S -  -  -  - LF

Pins Per Row  
01 - 40  
Row Specification  
S = Single Row

Lead Free

Polarized Position  
Leave blank if not needed  
If required, specify empty pin position, e.g. 012 for Pin 12

Pin Options	
Top Entry	02
Dual Entry	06

Plating Options	
G	10µ Gold on Contact Area / Flash on Tail
T	Matte Tin All Over
GT	10µ Gold on Contact Area / Matte Tin on Tail
H	30µ Gold on Contact Area / Matte Tin on Tail
F	Gold Flash over Entire Pin

Mates with:  
BSTC,  
BSTCM,  
BSTCR,  
BSTCRSM,  
BSTS,  
TBSTC,  
TBSTCM,  
TBSTCR,  
TBSTCRSM,  
TBSTS,  
TBSTCM,  
TBSTSC,  
TSHC,  
TSHCR,  
TSHCRE,  
TSHCRSM,  
TSHR,  
TSHRE,  
TSHS,  
TSHSCM,  
TTSHC,  
TTSHCR,  
TTSHCRE,  
TTSHR,  
TTSHRE,  
TTSHS,  
TTSHSM

## Specifications


Insertion Force - Single Contact only - H Plating:  
3.7oz. (1.03N) avg with .0197 (0.50mm) sq. pin  
Withdrawal Force - Single Contact only - H Plating:  
2.2oz. (0.61N) avg with .0197 (0.50mm) sq. pin  
Current Rating: 2.0 Ampere  
Insulation Resistance: 1000MΩ Min.  
Dielectric Withstanding: 500V AC  
Contact Resistance: 10 mΩ Max.  
Operating Temperature: -40°C to + 105°C  
Max. Process Temperature:  
Peak: 260°C up to 10 secs.  
Process: 230°C up to 60 secs.  
Wave: 260°C up to 6 secs.  
Manual Solder: 350°C up to 5 secs.

## Materials

Contact Material: Phosphor Bronze  
Insulator Material: Nylon 6T  
Plating: Au or Sn over 50µ" (1.27) Ni

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice



BCSS-2-SV SERIES

.079 cl Single Row  
Box Contact Socket Strip

15 FEB 07

Scale  
NTS

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS IN INCHES (MM)  
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100  
TWO PLACE DECIMALS ±.010  
THREE PLACE DECIMALS ±.005  
FOUR PLACE DECIMALS ±.0020  
ANGLES  
±5°



4235 Earnings Way, New Albany, Indiana, 47150, USA  
1-800-782-3486 (USA/Canada/Mexico)  
Tel: 812-944-7244  
Fax: 812-944-7268  
E-mail: mle@mlelectronics.com  
Web: www.mlelectronics.com

Edition  
1

Sheet  
1/1