



Defense  
and Aerospace

**KEMET**  
CHARGED.™

# Ceramic Leaded Capacitors

|                          | <b>KEMET Series</b>                          | <b>Page</b> |
|--------------------------|--|-------------|
| Performance Information  |  | 1-6         |
| MIL-PRF-20               | C052G/C062G/C114G/<br>C124G/192G/C202G/C222G | 7-12        |
| MIL-PRF-39014/01/02/05   | C052T/C062T/C114T/<br>C124T/192T/C202T/C222T | 13-18       |
| MIL-C-11015              | C052K/C062K/C114K/<br>C124K/192K/C202K/C222K | 13-18       |
| Ceramic Leaded Packaging |  | 19-21       |

**ELECTRICAL CHARACTERISTICS**

The fundamental electrical properties of multilayer ceramic capacitors are as follows:

**Polarity:** Multilayer ceramic capacitors are not polar, and may be used with DC voltage applied in either direction.


**Rated Voltage:** This term refers to the maximum continuous DC working voltage permissible across the entire operating temperature range. Multilayer ceramic capacitors are not extremely sensitive to voltage, and brief applications of voltage above rated will not result in immediate failure. However, reliability will be reduced by exposure to sustained voltages above rated.

**Capacitance:** The standard unit of capacitance is the farad. For practical capacitors, it is usually expressed in microfarads (10<sup>-6</sup> farad), nanofarads (10<sup>-9</sup> farad), or picofarads (10<sup>-12</sup> farad). Standard measurement conditions are as follows:

|                           |                            |
|---------------------------|----------------------------|
| Class I (up to 1,000 pF): | 1MHz and 1.2 VRMS maximum. |
| Class I (over 1,000 pF):  | 1kHz and 1.2 VRMS maximum. |
| Class II:                 | 1 kHz and 1.0 0.2 VRMS.    |
| Class III:                | 1 kHz and 0.5 0.1 VRMS.    |

Like all other practical capacitors, multilayer ceramic capacitors also have resistance and inductance. A simplified schematic for the equivalent circuit is shown in Figure 1. Other significant electrical characteristics resulting from these additional properties are as follows:

**Figure 1**

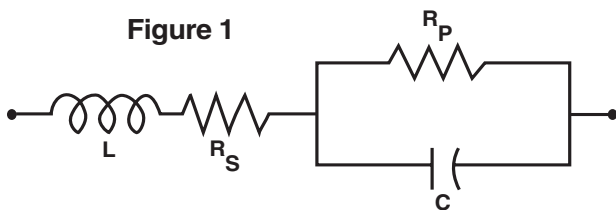

**C = Capacitance**      **RS = Equivalent Series Resistance (ESR)**  
**L = Inductance**      **RP = Insulation Resistance (IR)**

**Impedance:** Since the parallel resistance (Rp) is normally very high, the total impedance of the capacitor is:

$$Z = \sqrt{R_S^2 + (X_C - X_L)^2}$$

- Where**    **Z = Total Impedance**  
               **RS = Equivalent Series Resistance**  
               **XC = Capacitive Reactance =  $\frac{1}{2\pi fC}$**   
               **XL = Inductive Reactance =  $2\pi fL$**


The variation of a capacitor’s impedance with frequency determines its effectiveness in many applications.

**Dissipation Factor:** Dissipation Factor (DF) is a measure of the losses in a capacitor under AC application. It is the ratio of the equivalent series resistance to the capacitive reactance, and is usually expressed in percent. It is usually measured simultaneously with capacitance, and under the same conditions. The vector diagram in Figure 2 illustrates the relationship between DF, ESR, and impedance. The reciprocal of the dissipation factor is called the “Q”, or quality factor. For convenience, the “Q” factor is often used for very low values of dissipation factor. DF is sometimes called the “loss tangent” or “tangent δ”, as derived from this diagram.

**Figure 2**

$$DF = \frac{ESR}{X_C}$$

$$X_C = \frac{1}{2\pi fC}$$

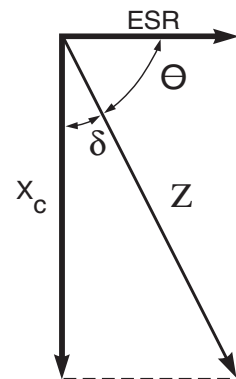

**Insulation Resistance:** Insulation Resistance (IR) is the DC resistance measured across the terminals of a capacitor, represented by the parallel resistance (Rp) shown in Figure 1. For a given dielectric type, electrode area increases with capacitance, resulting in a decrease in the insulation resistance. Consequently, insulation resistance is usually specified as the “RC” (IR x C) product, in terms of ohm-farads or megohm-microfarads. The insulation resistance for a specific capacitance value is determined by dividing this product by the capacitance. However, as the nominal capacitance values become small, the insulation resistance calculated from the RC product reaches values which are impractical. Consequently, IR specifications usually include both a minimum RC product and a maximum limit on the IR calculated from that value. For example, a typical IR specification might read “1,000 megohm-microfarads or 100 gigohms, whichever is less.”

Insulation Resistance is the measure of a capacitor to resist the flow of DC leakage current. It is sometimes referred to as “leakage resistance.” The DC leakage current may be calculated by dividing the applied voltage by the insulation resistance (Ohm’s Law).

**Dielectric Withstanding Voltage:** Dielectric withstanding voltage (DWW) is the peak voltage which a capacitor is designed to withstand for short periods of time without damage. All KEMET multilayer ceramic capacitors will withstand a test voltage of 2.5 x the rated voltage for 60 seconds.

KEMET specification limits for these characteristics at standard measurement conditions are shown on page 2. Variations in these properties caused by changing conditions of temperature, voltage, frequency, and time are covered in the following sections.

**TABLE 1**  
**EIA TEMPERATURE CHARACTERISTIC CODES**  
**FOR CLASS I DIELECTRICS**


| Significant Figure of Temperature Coefficient |               | Multiplier Applied to Temperature Coefficient |               | Tolerance of Temperature Coefficient * |               |
|---|---------------|---|---------------|--|---------------|
| PPM per Degree C                              | Letter Symbol | Multiplier                                    | Number Symbol | PPM per Degree C                       | Letter Symbol |
| 0.0   | C             | -1  | 0             | 3 0                                    | G             |
| 0.3   | B             | -10   | 1             | 60                                     | H             |
| 0.9   | A             | -100  | 2             | 120                                    | J             |
| 1.0   | M             | -1000   | 3             | 250                                    | K             |
| 1.5   | P             | -100000                                       | 4             | 500                                    | L             |
| 2.2   | R             | +1  | 5             | 1000                                   | M             |
| 3.3   | S             | +10   | 6             | 2500                                   | N             |
| 4.7   | T             | +100  | 7             |  |               |
| 7.5   | U             | +1000   | 8             |  |               |
|   |               | +10000  | 9             |  |               |

\* These symmetrical tolerances apply to a two-point measurement of temperature coefficient: one at 25°C and one at 85°C. Some deviation is permitted at lower temperatures. For example, the PPM tolerance for C0G at -55 is +30 / -72 PPM.


**TABLE 2**  
**EIA TEMPERATURE CHARACTERISTIC CODES**  
**FOR CLASS II & III DIELECTRICS**

| Low Temperature Rating |               | High Temperature Rating |               | Maximum Capacitance Shift |               |
|------------------------|---------------|-------------------------|---------------|---------------------------|---------------|
| Degree Celcius         | Letter Symbol | Degree Celcius          | Number Symbol | Percent                   | Letter Symbol |
| +10C                   | Z             | +45C                    | 2             | ±1.0%                     | A             |
| -30C                   | Y             | +65C                    | 4             | ±1.5%                     | B             |
| -55C                   | X             | +85C                    | 5             | ±2.2%                     | C             |
|                        |               | +105C                   | 6             | ±3.3%                     | D             |
|                        |               | +125C                   | 7             | ±4.7%                     | E             |
|                        |               | +150C                   | 8             | ±7.5%                     | F             |
|                        |               | +200C                   | 9             | ±10.0%                    | P             |
|                        |               |                         |               | ±15.0%                    | R             |
|                        |               |                         |               | ±22.0%                    | S             |
|                        |               |                         |               | +22/-33%                  | T             |
|                        |               |                         |               | +22/-56%                  | U             |
|                        |               |                         |               | +22/-82%                  | V             |

**EFFECT OF TEMPERATURE**

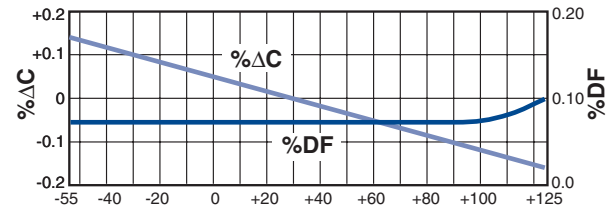

**Figure 3.** Temperature °C  
**Capacitance & DF vs Temperature - C0G**

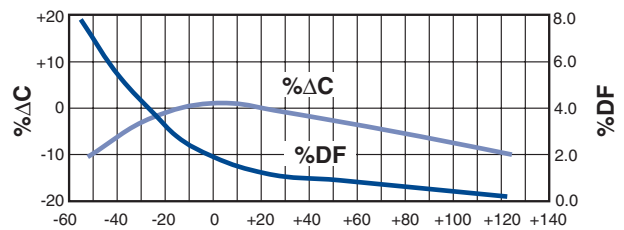


**Figure 4.** Temperature °C  
**Capacitance & DF vs Temperature - X7R**

**SPECIFIED ELECTRICAL LIMITS**

| PARAMETER  | TEMPERATURE CHARACTERISTICS  |                       |
|--|------------------------------|-----------------------|
|  | C0G                          | X7R                   |
| Dissipation Factor: Measured at following conditions:<br>C0G - 1 kHz and 1 vrms if capacitance > 1000 pF<br>1 Mhz and 1 vrms if capacitance ≤ 1000 pF<br>X7R - 1 kHz and 1 vrms* or if extended cap range 0.5 vrms | 0.15%                        | 2.5%                  |
| Dielectric Strength: 2.5 times rated DC voltage  | Pass Subsequent IR Test      |                       |
| Insulation Resistance (IR): At rated DC voltage, or whichever of the two is smaller  | 1,000 MΩ-μF or 100 GΩ        | 1,000 MΩ-μF or 100 GΩ |
| Temperature Characteristics: Range, °C<br>Capacitance Change without DC voltage  | -55 to +125<br>0 ± 30 ppm/°C | -55 to +125<br>±15%   |

\* 1 MHz and 1 vrms if capacitance ≤ 100 pF on military product.

**EFFECT OF APPLIED VOLTAGE**

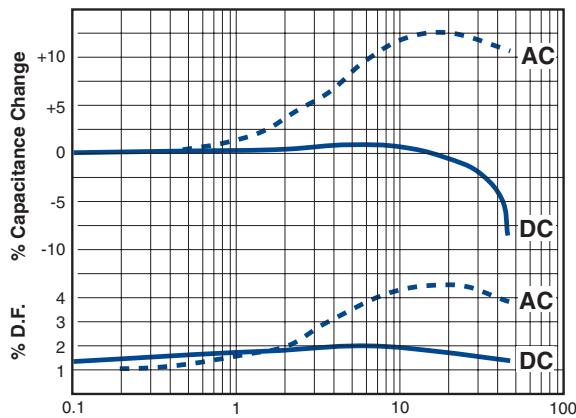

**Figure 6. AC or DC Volts Applied**  
**Typical Effects of 1000 Hz AC and DC Voltage Level on Capacitance and Dissipation Factor - X7R**

*Note: C0G Dielectric capacitance and dissipation factor are stable with voltage.*

**Effect of Temperature:** Both capacitance and dissipation factor are affected by variations in temperature. The maximum capacitance change with temperature is defined by the temperature characteristic. However, this only defines a “box” bounded by the upper and lower operating temperatures and the minimum and maximum capacitance values. Within this “box”, the variation with temperature depends upon the specific dielectric formulation. Typical curves for KEMET capacitors are shown in Figures 3 and 4. These figures also include the typical change in dissipation factor for KEMET capacitors.

Insulation resistance decreases with temperature. Typically, the insulation resistance at maximum rated temperature is 10% of the 25°C value.

**Effect of Voltage:** Class I ceramic capacitors are not affected by variations in applied AC or DC voltages. For Class II and III ceramic capacitors, variations in voltage affect only the capacitance and dissipation factor. The application of DC voltage higher than 5 vdc reduces both the capacitance and dissipation factor. The application of AC voltages up to 10-20 Vac tends to increase both capacitance and dissipation factor. At higher AC voltages, both capacitance and dissipation factor begin to decrease.

Typical curves showing the effect of applied AC and DC voltage are shown in Figure 6 for KEMET X7R capacitors.

**Effect of Frequency:** Frequency affects both capacitance and dissipation factor. Typical curves for KEMET multilayer ceramic capacitors are shown in Figures 8 and 9.

The variation of impedance with frequency is an important consideration in the application of multilayer ceramic capacitors. Total impedance of the capacitor is the vector of the capacitive reactance, the inductive reactance, and the ESR, as illustrated in Figure 2. As frequency increases, the capacitive reactance decreases. However, the series inductance (L) shown in Figure 1 produces inductive reactance, which increases with frequency. At some frequency, the impedance ceases to be capacitive and becomes inductive. This point, at the bottom of the V-shaped impedance versus frequency curves, is the self-resonant frequency. At the self-resonant frequency, the reactance is zero, and the impedance consists of the ESR only.

Typical impedance versus frequency curves for KEMET multilayer ceramic capacitors are shown in Figures 10 and 11. These curves apply to KEMET capacitors in chip form, without leads. Lead configuration and lead length have a significant impact on the series inductance. The lead inductance is approximately 10nH/inch, which is large compared to the inductance of the chip. The effect of this additional inductance is a decrease in the self-resonant frequency, and an increase in impedance in the inductive region above the self-resonant frequency.

**Effect of Time:** The capacitance of Class II and III dielectrics change with time as well as with temperature, voltage and frequency. This change with time is known as “aging.” It is caused by gradual realignment of the crystalline structure of the ceramic dielectric material as it is cooled below its Curie temperature, which produces a loss of capacitance with time. The aging process is predictable and follows a logarithmic decay. Typical aging rates for C0G and X7R dielectrics are as follows:

|     |                         |
|-----|-------------------------|
| C0G | None                    |
| X7R | 2.0% per decade of time |

Typical aging curves for X7R dielectrics is shown in Figure 12.

The aging process is reversible. If the capacitor is heated to a temperature above its Curie point for some period of time, de-aging will occur and the capacitor will regain the capacitance lost during the aging process. The amount of de-aging depends on both the elevated temperature and the length of time at that temperature. Exposure to 150°C for one-half hour or 125°C for two hours is usually sufficient to return the capacitor to its initial value.

Because the capacitance changes rapidly immediately after de-aging, capacitance measurements are usually delayed for at least 10 hours after the de-aging process, which is often referred to as the “last heat.” In addition, manufacturers utilize

the aging rates to set factory test limits which will bring the capacitance within the specified tolerance at some future time, to allow for customer receipt and use. Typically, the test limits are adjusted so that the capacitance will be within the specified tolerance after either 1,000 hours or 100 days, depending on the manufacturer and the product type.

### POWER DISSIPATION

Power dissipation has been empirically determined for two representative KEMET series: C052 and C062. Power dissipation capability for various mounting configurations is shown in Table 3. This table was extracted from Engineering Bulletin F-2013, which provides a more detailed treatment of this subject.

Note that no significant difference was detected between the two sizes in spite of a 2 to 1 surface area ratio. Due to the materials used in the construction of multilayer ceramic capacitors, the power dissipation capability does not depend greatly on the surface area of the capacitor body, but rather on how well heat is conducted out of the capacitor lead wires. Consequently, this power dissipation capability is applicable to other leaded multilayer styles and sizes.

**TABLE 3  
POWER DISSIPATION CAPABILITY  
(Rise in Celsius degrees per Watt)**

| Mounting Configuration   | Power Dissipation of C052 & C062     |
|--|--------------------------------------|
| 1.00" leadwires attached to binding post of GR-1615 bridge (excellent heat sink)                                       | 90 Celsius degrees rise per Watt 10% |
| 0.25" leadwires attached to binding post of GR-1615 bridge   | 55 Celsius degrees rise per Watt 10% |
| Capacitor mounted flush to 0.062" glass-epoxy circuit board with small copper traces                                   | 77 Celsius degrees rise per Watt 10% |
| Capacitor mounted flush to 0.062" glass-epoxy circuit board with four square inches of copper land area as a heat sink | 53 Celsius degrees rise per Watt 10% |

As shown in Table 3, the power dissipation capability of the capacitor is very sensitive to the details of its use environment. The temperature rise due to power dissipation should not exceed 20°C. Using that constraint, the maximum permissible power dissipation may be calculated from the data provided in Table 3.

It is often convenient to translate power dissipation capability into a permissible AC voltage rating. Assuming a sinusoidal wave form, the RMS "ripple voltage" may be calculated from the following formula:

$$E = Z \times \sqrt{\frac{P_{MAX}}{R}}$$

Where **E = RMS Ripple Voltage (volts)**

**P = Power Dissipation (watts)**

**Z = Impedance**

**R = ESR**

The data necessary to make this calculation is included in Engineering Bulletin F-2013. However, the following criteria must be observed:

1. The temperature rise due to power dissipation should be limited to 20°C.
2. The peak AC voltage plus the DC voltage must not exceed the maximum working voltage of the capacitor.

Provided that these criteria are met, multilayer ceramic capacitors may be operated with AC voltage applied without need for DC bias.

### RELIABILITY

A well constructed multilayer ceramic capacitor is extremely reliable and, for all practical purposes, has an infinite life span when used within the maximum voltage and temperature ratings. Capacitor failure may be induced by sustained operation at voltages that exceed the rated DC voltage, voltage spikes or transients that exceed the dielectric withstanding voltage, sustained operation at temperatures above the maximum rated temperature, or the excessive temperature rise due to power dissipation.

Failure rate is usually expressed in terms of percent per 1,000 hours or in FITS (failure per billion hours). Some KEMET series are qualified under U.S. military established reliability specifications MIL-PRF-20, MIL-PRF-123, MIL-PRF-39014, and MIL-PRF-55681. Failure rates as low as 0.001% per 1,000 hours are available for all capacitance / voltage ratings covered by these specifications. These specifications and accompanying Qualified Products List should be consulted for details.

For series not covered by these military specifications, an internal testing program is maintained by KEMET Quality Assurance. Samples from each week's production are subjected to a 2,000 hour accelerated life test at 2 x rated voltage and maximum rated temperature. Based on the results of these tests, the average failure rate for all non-military series covered by this test program is currently 0.06% per 1,000 hours at maximum rated conditions. The failure rate would be much lower at typical use conditions. For example, using MIL-HDBK-217D this failure rate translates to 0.9 FITS at 50% rated voltage and 50°C.

Current failure rate details for specific KEMET multilayer ceramic capacitor series are available on request.

### MISAPPLICATION

Ceramic capacitors, like any other capacitors, may fail if they are misapplied. Typical misapplications include exposure to excessive voltage, current or temperature. If the dielectric layer of the capacitor is damaged by misapplication the electrical energy of the circuit can be released as heat, which may damage the circuit board and other components as well.

If potential for misapplication exists, it is recommended that precautions be taken to protect personnel and equipment during initial application of voltage. Commonly used precautions include shielding of personnel and sensing for excessive power drain during board testing.

**EFFECT OF FREQUENCY**

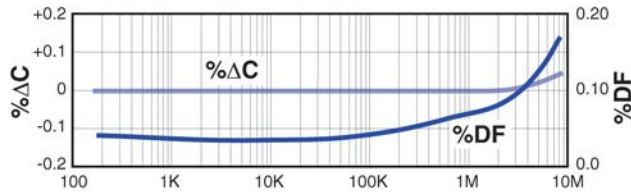


Figure 8. Frequency - Hertz  
Capacitance & DF vs Frequency - C0G

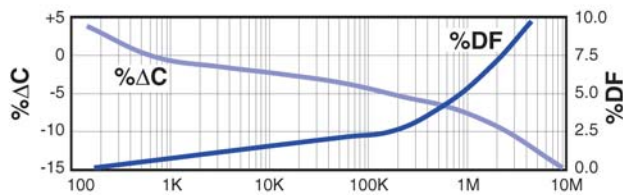


Figure 9. Frequency - Hertz  
Capacitance & DF vs Frequency - X7R

**EFFECT OF TIME**

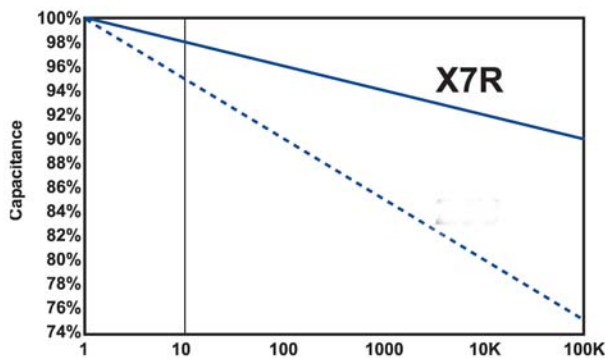


Figure 12 Typical Aging Rates for X7R

**IMPEDANCE VS FREQUENCY**

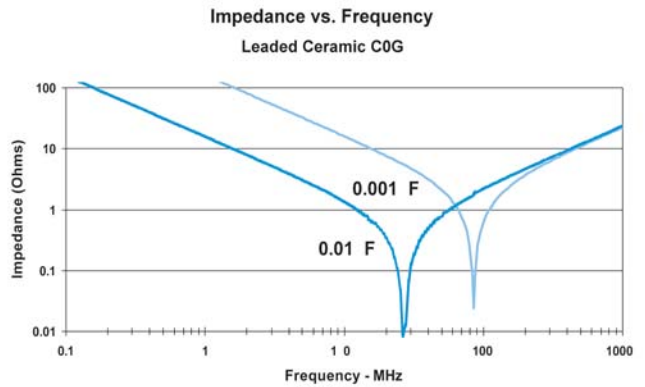


Figure 10. Impedance vs Frequency  
for C0G Dielectric

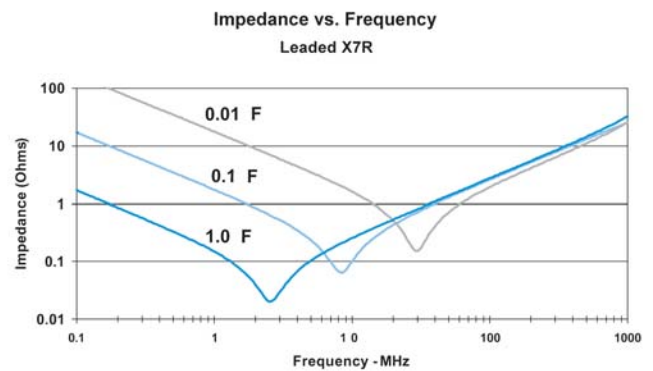


Figure 11. Impedance vs Frequency  
for X7R Dielectric

**GENERAL****Working Voltage:**

C0G – 50, 100 & 200 Volts  
X7R – 50, 100 & 200 Volts

**Temperature Characteristics:**

C0G – 0 30 PPM/°C from -55°C to +125°C  
X7R – 15% from -55°C to +125°C

**Capacitance Tolerance:**

C0G – ±0.5 pF, ±1%, ±2%, ±5%, ±10%, ±20%  
(±0.5 pF is tightest available tolerance)  
X7R – ±10%, ±20%, -0 +100%, -20% +80%

**Construction:**

Monolithic block of ceramic dielectric with interdigitated internal electrodes, encapsulated in a molded case, and having axial or radial leads. Meets flame test requirements of UL Standard 94V-0.

**Terminal Strength:**

EIA-198 Method 303 Condition A (2.2 kg)

**ELECTRICAL****Capacitance:**

Within specified tolerance when measured with 1 volt rms at 1 kHz (1000 pF or less at 1 MHz for C0G).

**Dissipation Factor:**

25°C at 1 kHz (1000 pF or less at 1 MHz for C0G).  
C0G – .15% maximum  
X7R – 2.5% maximum

**Insulation Resistance:**

After 2 minutes electrification at 25°C and rated voltage  
C0G – 100K megohms or 1000 megohm -  $\mu$ F, whichever is less.  
X7R – 100K megohms or 1000 megohm -  $\mu$ F, whichever is less.

**Dielectric Withstanding Voltage:**

250% of rated voltage for 5 seconds with current limited to 50 mA at 25°C.

**Life Test:**

2000 hours at 200% of rated voltage at 125°C. Post-Test limits at 25°C are:

**Capacitance Change:**

C0G – less than 3% or 0.25 pF, whichever is higher  
X7R – ±20% of initial value

**Dissipation Factor:**

C0G – .25% maximum  
X7R – 3.0% maximum

**Insulation Resistance:**

C0G – 10K megohms or 100 megohm -  $\mu$ F, whichever is less  
X7R – 10K megohms or 100 megohm -  $\mu$ F, whichever is less

**Dielectric Withstanding Voltage:**

250% of rated voltage for 5 seconds with current limited to 50 mA.

**ENVIRONMENTAL****Moisture Resistance:**

MIL-STD-202, Method 106, or EIA-198, Method 204, Condition A, except 20 cycles.

**Insulation Resistance:**

C0G – 10K megohms or 100 megohm -  $\mu$ F, whichever is less  
X7R – 10K megohms or 100 megohm -  $\mu$ F, whichever is less

**Dielectric Withstanding Voltage:**

250% of rated voltage for 5 seconds with current limited to 50 mA.

**Immersion Cycling:**

MIL-STD-202, Method 104, Condition B. Post-Test limits at 25°C are:

**Insulation Resistance:**

C0G – 10K megohms or 100 megohm -  $\mu$ F, whichever is less  
X7R – 10K megohms or 100 megohm -  $\mu$ F, whichever is less

**Solderability:**

MIL-STD-202, Method 208, Sn62 solder, 245°C for 5 1/2 seconds.

**Resistance to Soldering Heat:**


MIL-STD-202, Method 210, Condition B (260°C, 10 secs).  
Depth of immersion – to a minimum of .050" from the capacitor body.

**Lead Material:**

Axial: Solder-coated copper clad steel  
Radial: Solder-coated copper




## CAPACITOR OUTLINE DRAWINGS (AXIAL LEADS)

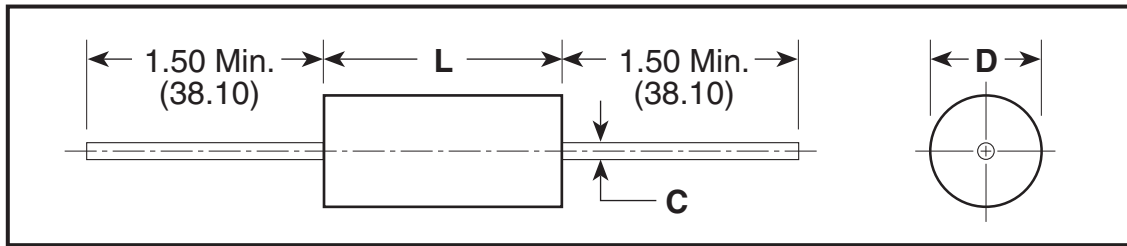

## DIMENSIONS – INCHES & (MILLIMETERS)

| CASE SIZE | MILITARY EQUIVALENT STYLES | L                         | D                        | C                                    |
|-----------|----------------------------|---------------------------|--------------------------|--------------------------------------|
| C114      | CC75, CCR75                | .160 ± .010 (4.06 ± .25)  | .090 ± .010 (2.29 ± .25) | .020, +.000, -.003 (.51, +.00, -.08) |
| C124      | CC76, CCR76                | .250 ± .010 (6.35 ± .25)  | .090 ± .010 (2.29 ± .25) | .020, +.000, -.003 (.51, +.00, -.08) |
| C192      | CC77, CCR77                | .390 ± .010 (9.91 ± .25)  | .140 ± .010 (3.56 ± .25) | .025, +.002, -.002 (.64, +.05, -.05) |
| C202      | CC78, CCR78                | .500 ± .020 (12.70 ± .51) | .250 ± .015 (6.35 ± .38) | .025, +.002, -.002 (.64, +.05, -.05) |
| C222      | CC79, CCR79                | .690 ± .030 (17.53 ± .76) | .350 ± .020 (8.89 ± .51) | .025, +.002, -.002 (.64, +.05, -.05) |

## CAPACITOR OUTLINE DRAWINGS (RADIAL LEADS)

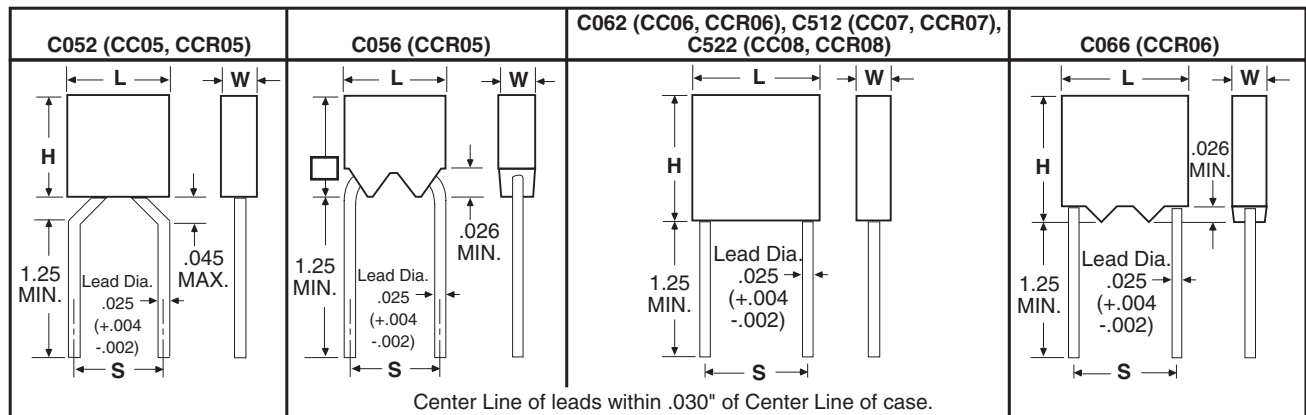


\* Leads are .625 minimum when tape and reel packaged

## DIMENSIONS – INCHES & (MILLIMETERS)

| CASE SIZE     | MILITARY EQUIVALENT STYLES | H HEIGHT                  | L LENGTH                  | W WIDTH                   | S LEAD SPACING            |
|---------------|----------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| C052/<br>C056 | CC05, CCR05                | .190 ± .010 (4.83 ± .25)  | .190 ± .010 (4.83 ± .25)  | .090 ± .010 (2.29 ± .25)  | .200 ± .015 (5.08 ± .38)  |
| C062/<br>C066 | CC06, CCR06                | .290 ± .010 (7.37 ± .25)  | .290 ± .010 (7.37 ± .25)  | .090 ± .010 (2.29 ± .25)  | .200 ± .015 (5.08 ± .38)  |
| C512          | CC07, CCR07                | .480 ± .020 (12.19 ± .51) | .480 ± .020 (12.19 ± .51) | .140 ± .010 (3.56 ± .25)* | .400 ± .020 (10.16 ± .51) |
| C522          | CC08, CCR08                | .480 ± .020 (12.19 ± .51) | .480 ± .020 (12.19 ± .51) | .240 ± .010 (6.10 ± .25)  | .400 ± .020 (10.16 ± .51) |

\* 0.200 (5.08) maximum for 100,000 pF only.

## ORDERING INFORMATION

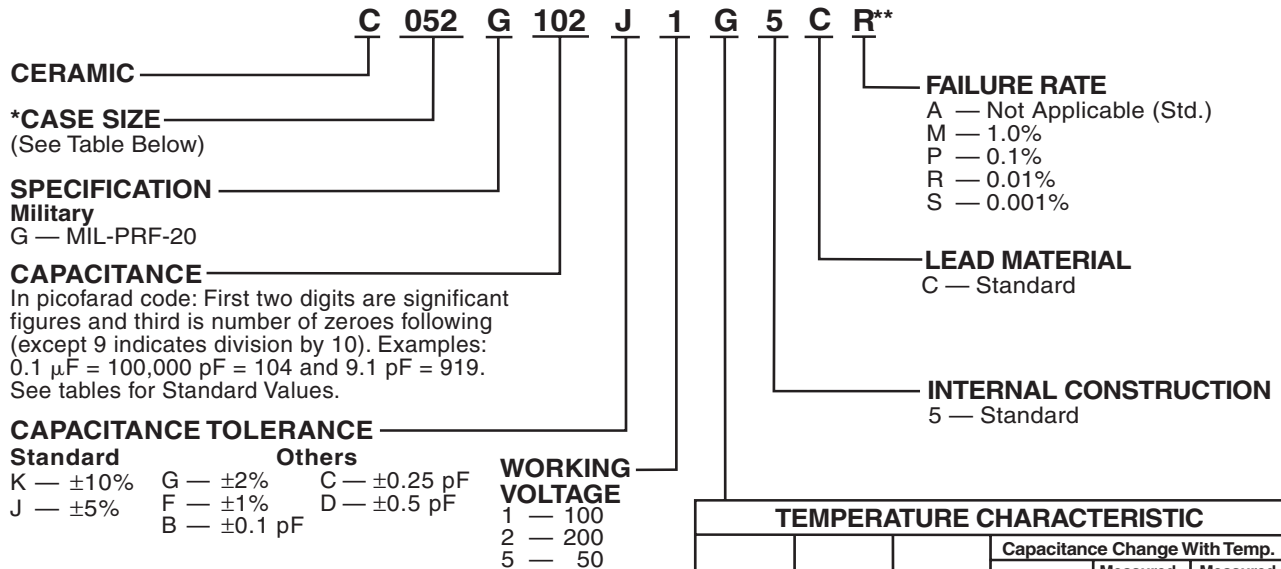

Standard tolerances for each Series are shown in the repetitive parts lists.

| *CASE SIZES |       |
|-------------|-------|
| RADIAL      | AXIAL |
| C052        | C114  |
| C056        | C124  |
| C062        | C192  |
| C066        | C202  |
| C512        | C222  |
| C522        |       |


| TEMPERATURE CHARACTERISTIC |                     |                |                               |                                  |                                    |
|----------------------------|---------------------|----------------|-------------------------------|----------------------------------|------------------------------------|
| KEMET Designator           | Military Equivalent | EIA Equivalent | Capacitance Change With Temp. |                                  |                                    |
|                            |                     |                | Temp. Range, °C               | Measured Without DC Bias Voltage | Measured With Bias (Rated Voltage) |
| G (Ultra Stable)           | *CG (See below)     | COG (NPO)      | -55 to +125                   | $\pm 30$ ppm/°C*                 | $\pm 30$ ppm/°C*                   |

\*CH —  $\pm 60$  ppm/°C 8.2 pF-18.0 pF.  
\*CJ —  $\pm 120$  ppm/°C 4.3 pF-7.5 pF.  
\*CK —  $\pm 250$  ppm/°C 2.2 pF-3.9 pF  
\*CX — not measurable 0.1 pF-2.0 pF.


**\*\*Part Number Example: C052G102J1G5CR (14 digits – no spaces)**

## CAPACITOR MARKING


### CC(R) 75, 76

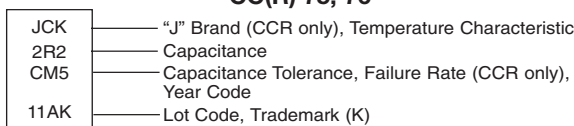


### CC(R) 77

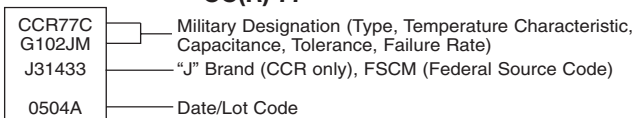


### CC(R) 78

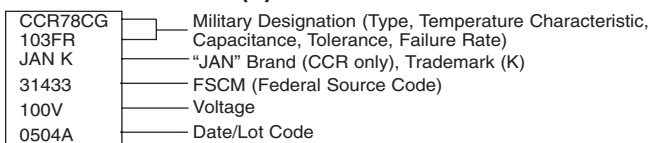


### CC(R) 79

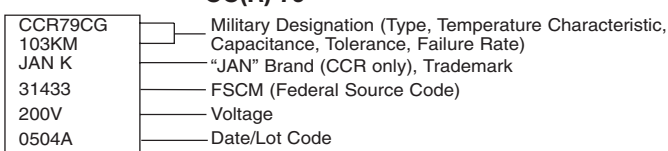


### CC(R) 05

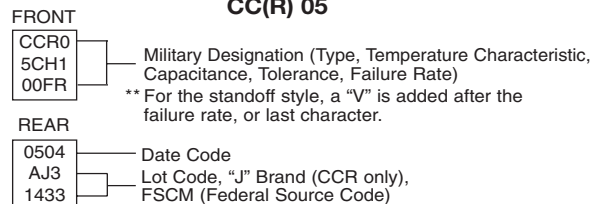


### CC(R) 06

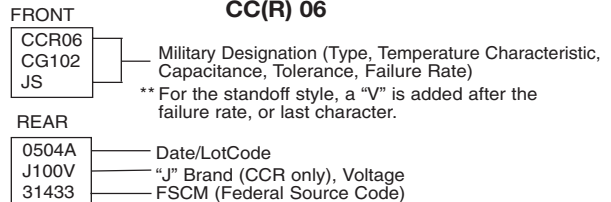

### CC(R) 07

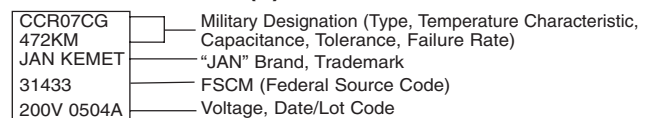

### CC(R) 08

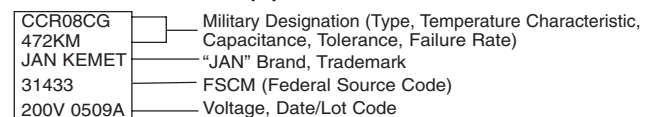

## RATINGS & PART NUMBER REFERENCE

| CAP. pF  | KEMET PART NUMBER  | MILITARY STYLE CC | MILITARY STYLE CCR |
|--|--------------------|-------------------|--------------------|
| <b>200 VOLT — C114 (CC(R)75 PER MIL-PRF-20/27)</b> |                    |                   |                    |
| 1.0  | C114G109(2)2G5C(1) | CC75CX1R0(2)      | CCR75CX1R0(2)(1)   |
| 1.1  | C114G119(2)2G5C(1) | CC75CX1R1(2)      | CCR75CX1R1(2)(1)   |
| 1.2  | C114G129(2)2G5C(1) | CC75CX1R2(2)      | CCR75CX1R2(2)(1)   |
| 1.3  | C114G139(2)2G5C(1) | CC75CX1R3(2)      | CCR75CX1R3(2)(1)   |
| 1.5  | C114G159(2)2G5C(1) | CC75CX1R5(2)      | CCR75CX1R5(2)(1)   |
| 1.6  | C114G169(2)2G5C(1) | CC75CX1R6(2)      | CCR75CX1R6(2)(1)   |
| 1.8  | C114G189(2)2G5C(1) | CC75CX1R8(2)      | CCR75CX1R8(2)(1)   |
| 2.0  | C114G209(2)2G5C(1) | CC75CX2R0(2)      | CCR75CX2R0(2)(1)   |
| 2.2  | C114G229(2)2G5C(1) | CC75CK2R2(2)      | CCR75CK2R2(2)(1)   |
| 2.4  | C114G249(2)2G5C(1) | CC75CK2R4(2)      | CCR75CK2R4(2)(1)   |
| 2.7  | C114G279(2)2G5C(1) | CC75CK2R7(3)      | CCR75CK2R7(3)(1)   |
| 3.0  | C114G309(3)2G5C(1) | CC75CK3R0(3)      | CCR75CK3R0(3)(1)   |
| 3.3  | C114G339(3)2G5C(1) | CC75CK3R3(3)      | CCR75CK3R3(3)(1)   |
| 3.6  | C114G369(3)2G5C(1) | CC75CK3R6(3)      | CCR75CK3R6(3)(1)   |
| 3.9  | C114G399(3)2G5C(1) | CC75CK3R9(3)      | CCR75CK3R9(3)(1)   |
| 4.3  | C114G439(3)2G5C(1) | CC75CJ4R3(3)      | CCR75CJ4R3(3)(1)   |
| 4.7  | C114G479(3)2G5C(1) | CC75CJ4R7(3)      | CCR75CJ4R7(3)(1)   |
| 5.1  | C114G519(3)2G5C(1) | CC75CJ5R1(3)      | CCR75CJ5R1(3)(1)   |
| 5.6  | C114G569(3)2G5C(1) | CC75CJ5R6(3)      | CCR75CJ5R6(3)(1)   |
| 6.2  | C114G629(3)2G5C(1) | CC75CJ6R2(3)      | CCR75CJ6R2(3)(1)   |
| 6.8  | C114G689(3)2G5C(1) | CC75CJ6R8(3)      | CCR75CJ6R8(3)(1)   |
| 7.5  | C114G759(3)2G5C(1) | CC75CJ7R5(3)      | CCR75CJ7R5(3)(1)   |
| 8.2  | C114G829(3)2G5C(1) | CC75CH8R2(3)      | CCR75CH8R2(3)(1)   |
| 9.1  | C114G919(3)2G5C(1) | CC75CH9R1(3)      | CCR75CH9R1(3)(1)   |
| 10.0   | C114G100(4)2G5C(1) | CC75CH100(4)      | CCR75CH100(4)(1)   |
| 11.0   | C114G110(4)2G5C(1) | CC75CH110(4)      | CCR75CH110(4)(1)   |
| 12.0   | C114G120(4)2G5C(1) | CC75CH120(4)      | CCR75CH120(4)(1)   |
| 13.0   | C114G130(4)2G5C(1) | CC75CH130(4)      | CCR75CH130(4)(1)   |
| 15.0   | C114G150(4)2G5C(1) | CC75CH150(4)      | CCR75CH150(4)(1)   |
| 16.0   | C114G160(4)2G5C(1) | CC75CH160(4)      | CCR75CH160(4)(1)   |
| 18.0   | C114G180(4)2G5C(1) | CC75CH180(4)      | CCR75CH180(4)(1)   |
| 20.0   | C114G200(4)2G5C(1) | CC75CG200(4)      | CCR75CG200(4)(1)   |
| 22.0   | C114G220(4)2G5C(1) | CC75CG220(4)      | CCR75CG220(4)(1)   |
| 24.0   | C114G240(4)2G5C(1) | CC75CG240(4)      | CCR75CG240(4)(1)   |
| 27.0   | C114G270(4)2G5C(1) | CC75CG270(4)      | CCR75CG270(4)(1)   |
| 30.0   | C114G300(4)2G5C(1) | CC75CG300(4)      | CCR75CG300(4)(1)   |
| 33.0   | C114G330(4)2G5C(1) | CC75CG330(4)      | CCR75CG330(4)(1)   |
| 36.0   | C114G360(4)2G5C(1) | CC75CG360(4)      | CCR75CG360(4)(1)   |
| 39.0   | C114G390(4)2G5C(1) | CC75CG390(4)      | CCR75CG390(4)(1)   |
| 43.0   | C114G430(4)2G5C(1) | CC75CG430(4)      | CCR75CG430(4)(1)   |
| 47.0   | C114G470(4)2G5C(1) | CC75CG470(4)      | CCR75CG470(4)(1)   |
| 51.0   | C114G510(4)2G5C(1) | CC75CG510(4)      | CCR75CG510(4)(1)   |
| 56.0   | C114G560(4)2G5C(1) | CC75CG560(4)      | CCR75CG560(4)(1)   |
| 62.0   | C114G620(4)2G5C(1) | CC75CG620(4)      | CCR75CG620(4)(1)   |
| 68.0   | C114G680(4)2G5C(1) | CC75CG680(4)      | CCR75CG680(4)(1)   |
| 75.0   | C114G750(4)2G5C(1) | CC75CG750(4)      | CCR75CG750(4)(1)   |

To complete Part Number, insert the following letters:  
 (1) Available Failure Rates: A (CC styles only); M, P, R & S (CCR styles only).  
 (2) Available Capacitance Tolerances: B, C.  
 (3) Available Capacitance Tolerances: B, C, D.  
 (4) Available Capacitance Tolerances: F, G, J.

| CAP. pF  | KEMET PART NUMBER  | MILITARY STYLE CC | MILITARY STYLE CCR |
|--|--------------------|-------------------|--------------------|
| <b>100 VOLT — C114 (CC(R)75 PER MIL-PRF-20/27)</b> |                    |                   |                    |
| 82.0   | C114G820(4)1G5C(1) | CC75CG820(4)      | CCR75CG820(4)(1)   |
| 91.0   | C114G910(4)1G5C(1) | CC75CG910(4)      | CCR75CG910(4)(1)   |
| 100.0  | C114G101(4)1G5C(1) | CC75CG101(4)      | CCR75CG101(4)(1)   |
| 110.0  | C114G111(4)1G5C(1) | CC75CG111(4)      | CCR75CG111(4)(1)   |
| 120.0  | C114G121(4)1G5C(1) | CC75CG121(4)      | CCR75CG121(4)(1)   |
| 130.0  | C114G131(4)1G5C(1) | CC75CG131(4)      | CCR75CG131(4)(1)   |
| 150.0  | C114G151(4)1G5C(1) | CC75CG151(4)      | CCR75CG151(4)(1)   |
| 160.0  | C114G161(4)1G5C(1) | CC75CG161(4)      | CCR75CG161(4)(1)   |
| 180.0  | C114G181(4)1G5C(1) | CC75CG181(4)      | CCR75CG181(4)(1)   |
| 200.0  | C114G201(4)1G5C(1) | CC75CG201(4)      | CCR75CG201(4)(1)   |
| 220.0  | C114G221(4)1G5C(1) | CC75CG221(4)      | CCR75CG221(4)(1)   |
| 240.0  | C114G241(4)1G5C(1) | CC75CG241(4)      | CCR75CG241(4)(1)   |
| <b>50 VOLT — C114 (CC(R)75 PER MIL-PRF-20/27)</b>  |                    |                   |                    |
| 270.0  | C114G271(4)5G5C(1) | CC75CG271(4)      | CCR75CG271(4)(1)   |
| 300.0  | C114G301(4)5G5C(1) | CC75CG301(4)      | CCR75CG301(4)(1)   |
| 330.0  | C114G331(4)5G5C(1) | CC75CG331(4)      | CCR75CG331(4)(1)   |
| 360.0  | C114G361(4)5G5C(1) | CC75CG361(4)      | CCR75CG361(4)(1)   |
| 390.0  | C114G391(4)5G5C(1) | CC75CG391(4)      | CCR75CG391(4)(1)   |
| 430.0  | C114G431(4)5G5C(1) | CC75CG431(4)      | CCR75CG431(4)(1)   |
| 470.0  | C114G471(4)5G5C(1) | CC75CG471(4)      | CCR75CG471(4)(1)   |
| 510.0  | C114G511(4)5G5C(1) | CC75CG511(4)      | CCR75CG511(4)(1)   |
| 560.0  | C114G561(4)5G5C(1) | CC75CG561(4)      | CCR75CG561(4)(1)   |
| 620.0  | C114G621(4)5G5C(1) | CC75CG621(4)      | CCR75CG621(4)(1)   |
| 680.0  | C114G681(4)5G5C(1) | CC75CG681(4)      | CCR75CG681(4)(1)   |
| <b>200 VOLT — C124 (CC(R)76 PER MIL-PRF-20/28)</b> |                    |                   |                    |
| 82.0   | C124G820(4)2G5C(1) | CC76CG820(4)      | CCR76CG820(4)(1)   |
| 91.0   | C124G910(4)2G5C(1) | CC76CG910(4)      | CCR76CG910(4)(1)   |
| 100.0  | C124G101(4)2G5C(1) | CC76CG101(4)      | CCR76CG101(4)(1)   |
| 110.0  | C124G111(4)2G5C(1) | CC76CG111(4)      | CCR76CG111(4)(1)   |
| 120.0  | C124G121(4)2G5C(1) | CC76CG121(4)      | CCR76CG121(4)(1)   |
| 130.0  | C124G131(4)2G5C(1) | CC76CG131(4)      | CCR76CG131(4)(1)   |
| <b>100 VOLT — C124 (CC(R)76 PER MIL-PRF-20/28)</b> |                    |                   |                    |
| 270.0  | C124G271(4)1G5C(1) | CC76CG271(4)      | CCR76CG271(4)(1)   |
| 300.0  | C124G301(4)1G5C(1) | CC76CG301(4)      | CCR76CG301(4)(1)   |
| 330.0  | C124G331(4)1G5C(1) | CC76CG331(4)      | CCR76CG331(4)(1)   |
| 360.0  | C124G361(4)1G5C(1) | CC76CG361(4)      | CCR76CG361(4)(1)   |
| 390.0  | C124G391(4)1G5C(1) | CC76CG391(4)      | CCR76CG391(4)(1)   |
| 430.0  | C124G431(4)1G5C(1) | CC76CG431(4)      | CCR76CG431(4)(1)   |
| 470.0  | C124G471(4)1G5C(1) | CC76CG471(4)      | CCR76CG471(4)(1)   |
| 510.0  | C124G511(4)1G5C(1) | CC76CG511(4)      | CCR76CG511(4)(1)   |
| 560.0  | C124G561(4)1G5C(1) | CC76CG561(4)      | CCR76CG561(4)(1)   |
| 620.0  | C124G621(4)1G5C(1) | CC76CG621(4)      | CCR76CG621(4)(1)   |
| 680.0  | C124G681(4)1G5C(1) | CC76CG681(4)      | CCR76CG681(4)(1)   |
| <b>50 VOLT — C124 (CC(R)76 PER MIL-PRF-20/28)</b>  |                    |                   |                    |
| 750.0  | C124G751(4)5G5C(1) | CC76CG751(4)      | CCR76CG751(4)(1)   |
| 820.0  | C124G821(4)5G5C(1) | CC76CG821(4)      | CCR76CG821(4)(1)   |
| 910.0  | C124G911(4)5G5C(1) | CC76CG911(4)      | CCR76CG911(4)(1)   |
| 1,000.0  | C124G102(4)5G5C(1) | CC76CG102(4)      | CCR76CG102(4)(1)   |
| <b>200 VOLT — C192 (CC(R)77 PER MIL-PRF-20/29)</b> |                    |                   |                    |
| 150.0  | C192G151(4)2G5C(1) | CC77CG151(4)      | CCR77CG151(4)(1)   |
| 160.0  | C192G161(4)2G5C(1) | CC77CG161(4)      | CCR77CG161(4)(1)   |
| 180.0  | C192G181(4)2G5C(1) | CC77CG181(4)      | CCR77CG181(4)(1)   |
| 200.0  | C192G201(4)2G5C(1) | CC77CG201(4)      | CCR77CG201(4)(1)   |
| 220.0  | C192G221(4)2G5C(1) | CC77CG221(4)      | CCR77CG221(4)(1)   |
| 240.0  | C192G241(4)2G5C(1) | CC77CG241(4)      | CCR77CG241(4)(1)   |
| 270.0  | C192G271(4)2G5C(1) | CC77CG271(4)      | CCR77CG271(4)(1)   |
| 300.0  | C192G301(4)2G5C(1) | CC77CG301(4)      | CCR77CG301(4)(1)   |
| 330.0  | C192G331(4)2G5C(1) | CC77CG331(4)      | CCR77CG331(4)(1)   |
| 360.0  | C192G361(4)2G5C(1) | CC77CG361(4)      | CCR77CG361(4)(1)   |
| 390.0  | C192G391(4)2G5C(1) | CC77CG391(4)      | CCR77CG391(4)(1)   |
| 430.0  | C192G431(4)2G5C(1) | CC77CG431(4)      | CCR77CG431(4)(1)   |
| 470.0  | C192G471(4)2G5C(1) | CC77CG471(4)      | CCR77CG471(4)(1)   |
| 510.0  | C192G511(4)2G5C(1) | CC77CG511(4)      | CCR77CG511(4)(1)   |
| 560.0  | C192G561(4)2G5C(1) | CC77CG561(4)      | CCR77CG561(4)(1)   |
| 620.0  | C192G621(4)2G5C(1) | CC77CG621(4)      | CCR77CG621(4)(1)   |
| 680.0  | C192G681(4)2G5C(1) | CC77CG681(4)      | CCR77CG681(4)(1)   |

## RATINGS & PART NUMBER REFERENCE

| CAP. pF  | KEMET PART NUMBER  | MILITARY STYLE CC | MILITARY STYLE CCR |
|--|--------------------|-------------------|--------------------|
| <b>100 VOLT – C192 (CC(R)77 PER MIL-PRF-20/29)</b> |                    |                   |                    |
| 750.0  | C192G751(4)1G5C(1) | CC77CG751(4)      | CCR77CG751(4)(1)   |
| 820.0  | C192G821(4)1G5C(1) | CC77CG821(4)      | CCR77CG821(4)(1)   |
| 910.0  | C192G911(4)1G5C(1) | CC77CG911(4)      | CCR77CG911(4)(1)   |
| 1,000.0  | C192G102(4)1G5C(1) | CC77CG102(4)      | CCR77CG102(4)(1)   |
| 1,100.0  | C192G112(4)1G5C(1) | CC77CG112(4)      | CCR77CG112(4)(1)   |
| 1,200.0  | C192G122(4)1G5C(1) | CC77CG122(4)      | CCR77CG122(4)(1)   |
| 1,300.0  | C192G132(4)1G5C(1) | CC77CG132(4)      | CCR77CG132(4)(1)   |
| 1,500.0  | C192G152(4)1G5C(1) | CC77CG152(4)      | CCR77CG152(4)(1)   |
| 1,600.0  | C192G162(4)1G5C(1) | CC77CG162(4)      | CCR77CG162(4)(1)   |
| 1,800.0  | C192G182(4)1G5C(1) | CC77CG182(4)      | CCR77CG182(4)(1)   |
| 2,000.0  | C192G202(4)1G5C(1) | CC77CG202(4)      | CCR77CG202(4)(1)   |
| 2,200.0  | C192G222(4)1G5C(1) | CC77CG222(4)      | CCR77CG222(4)(1)   |
| <b>50 VOLT – C192 (CC(R)77 PER MIL-PRF-20/29)</b>  |                    |                   |                    |
| 2,400.0  | C192G242(4)5G5C(1) | CC77CG242(4)      | CCR77CG242(4)(1)   |
| 2,700.0  | C192G272(4)5G5C(1) | CC77CG272(4)      | CCR77CG272(4)(1)   |
| 3,000.0  | C192G302(4)5G5C(1) | CC77CG302(4)      | CCR77CG302(4)(1)   |
| 3,300.0  | C192G332(4)5G5C(1) | CC77CG332(4)      | CCR77CG332(4)(1)   |
| 3,600.0  | C192G362(4)5G5C(1) | CC77CG362(4)      | CCR77CG362(4)(1)   |
| 3,900.0  | C192G392(4)5G5C(1) | CC77CG392(4)      | CCR77CG392(4)(1)   |
| 4,300.0  | C192G432(4)5G5C(1) | CC77CG432(4)      | CCR77CG432(4)(1)   |
| 4,700.0  | C192G472(4)5G5C(1) | CC77CG472(4)      | CCR77CG472(4)(1)   |
| 5,100.0  | C192G512(5)5G5C(1) | CC77CG512(5)      | CCR77CG512(5)(1)   |
| 5,600.0  | C192G562(5)5G5C(1) | CC77CG562(5)      | CCR77CG562(5)(1)   |
| <b>200 VOLT – C202 (CC(R)78 PER MIL-PRF-20/30)</b> |                    |                   |                    |
| 820.0  | C202G821(5)2G5C(1) | CC78CG821(5)      | CCR78CG821(5)(1)   |
| 1,000.0  | C202G102(5)2G5C(1) | CC78CG102(5)      | CCR78CG102(5)(1)   |
| 1,200.0  | C202G122(5)2G5C(1) | CC78CG122(5)      | CCR78CG122(5)(1)   |
| 1,500.0  | C202G152(5)2G5C(1) | CC78CG152(5)      | CCR78CG152(5)(1)   |
| 1,800.0  | C202G182(5)2G5C(1) | CC78CG182(5)      | CCR78CG182(5)(1)   |
| 2,200.0  | C202G222(5)2G5C(1) | CC78CG222(5)      | CCR78CG222(5)(1)   |
| 2,700.0  | C202G272(5)2G5C(1) | CC78CG272(5)      | CCR78CG272(5)(1)   |
| 3,300.0  | C202G332(5)2G5C(1) | CC78CG332(5)      | CCR78CG332(5)(1)   |

| CAP. pF  | KEMET PART NUMBER  | MILITARY STYLE CC | MILITARY STYLE CCR |
|--|--------------------|-------------------|--------------------|
| <b>100 VOLT – C202 (CC(R)78 PER MIL-PRF-20/30)</b> |                    |                   |                    |
| 3,900.0  | C202G392(5)1G5C(1) | CC78CG392(5)      | CCR78CG392(5)(1)   |
| 4,700.0  | C202G472(5)1G5C(1) | CC78CG472(5)      | CCR78CG472(5)(1)   |
| 5,600.0  | C202G562(5)1G5C(1) | CC78CG562(5)      | CCR78CG562(5)(1)   |
| 6,800.0  | C202G682(5)1G5C(1) | CC78CG682(5)      | CCR78CG682(5)(1)   |
| 8,200.0  | C202G822(5)1G5C(1) | CC78CG822(5)      | CCR78CG822(5)(1)   |
| 10,000.0   | C202G103(5)1G5C(1) | CC78CG103(5)      | CCR78CG103(5)(1)   |
| 12,000.0   | C202G123(5)1G5C(1) | CC78CG123(5)      | CCR78CG123(5)(1)   |
| <b>50 VOLT – C202 (CC(R)78 PER MIL-PRF-20/30)</b>  |                    |                   |                    |
| 15,000.0   | C202G153(5)5G5C(1) | CC78CG153(5)      | CCR78CG153(5)(1)   |
| 18,000.0   | C202G183(5)5G5C(1) | CC78CG183(5)      | CCR78CG183(5)(1)   |
| 22,000.0   | C202G223(5)5G5C(1) | CC78CG223(5)      | CCR78CG223(5)(1)   |
| 27,000.0   | C202G273(5)5G5C(1) | CC78CG273(5)      | CCR78CG273(5)(1)   |
| <b>200 VOLT – C222 (CC(R)79 PER MIL-PRF-20/31)</b> |                    |                   |                    |
| 3,900.0  | C222G392(5)2G5C(1) | CC79CG392(5)      | CCR79CG392(5)(1)   |
| 4,700.0  | C222G472(5)2G5C(1) | CC79CG472(5)      | CCR79CG472(5)(1)   |
| 5,600.0  | C222G562(5)2G5C(1) | CC79CG562(5)      | CCR79CG562(5)(1)   |
| 6,800.0  | C222G682(5)2G5C(1) | CC79CG682(5)      | CCR79CG682(5)(1)   |
| 8,200.0  | C222G822(5)2G5C(1) | CC79CG822(5)      | CCR79CG822(5)(1)   |
| 10,000.0   | C222G103(5)2G5C(1) | CC79CG103(5)      | CCR79CG103(5)(1)   |
| <b>100 VOLT – C222 (CC(R)79 PER MIL-PRF-20/31)</b> |                    |                   |                    |
| 15,000.0   | C222G153(5)1G5C(1) | CC79CG153(5)      | CCR79CG153(5)(1)   |
| 18,000.0   | C222G183(5)1G5C(1) | CC79CG183(5)      | CCR79CG183(5)(1)   |
| 22,000.0   | C222G223(5)1G5C(1) | CC79CG223(5)      | CCR79CG223(5)(1)   |
| 27,000.0   | C222G273(5)1G5C(1) | CC79CG273(5)      | CCR79CG273(5)(1)   |
| 33,000.0   | C222G333(5)1G5C(1) | CC79CG333(5)      | CCR79CG333(5)(1)   |
| 39,000.0   | C222G393(5)1G5C(1) | CC79CG393(5)      | CCR79CG393(5)(1)   |
| <b>50 VOLT – C222 (CC(R)79 PER MIL-PRF-20/31)</b>  |                    |                   |                    |
| 47,000.0   | C222G473(5)5G5C(1) | CC79CG473(5)      | CCR79CG473(5)(1)   |
| 56,000.0   | C222G563(5)5G5C(1) | CC79CG563(5)      | CCR79CG563(5)(1)   |
| 68,000.0   | C222G683(5)5G5C(1) | CC79CG683(5)      | CCR79CG683(5)(1)   |
| 82,000.0   | C222G823(5)5G5C(1) | CC79CG823(5)      | CCR79CG823(5)(1)   |

To complete Part Number, insert the following letters:  
 (1) Available Failure Rates: A (CC styles only); M, P, R & S (CCR styles only).  
 (2) Available Capacitance Tolerances: B, C.  
 (3) Available Capacitance Tolerances: B, C, D.  
 (4) Available Capacitance Tolerances: F, G, J.  
 (5) Available Capacitance Tolerances: F, G, J, K.

## RATINGS & PART NUMBER REFERENCE

| CAP. pF  | KEMET PART NUMBER    | MILITARY STYLE CC | MILITARY STYLE CCR  |
|--|----------------------|-------------------|---------------------|
| <b>200 VOLT — C052/C056 SIZE (CC(R)05 PER MIL-PRF-20/35)</b> |                      |                   |                     |
| 1.0  | C05(6)G109(2)2G5C(1) | CC05CX1R0(2)      | CCR05CX1R0(2)(1)(7) |
| 1.1  | C05(6)G119(2)2G5C(1) | CC05CX1R1(2)      | CCR05CX1R1(2)(1)(7) |
| 1.2  | C05(6)G129(2)2G5C(1) | CC05CX1R2(2)      | CCR05CX1R2(2)(1)(7) |
| 1.3  | C05(6)G139(2)2G5C(1) | CC05CX1R3(2)      | CCR05CX1R3(2)(1)(7) |
| 1.5  | C05(6)G159(2)2G5C(1) | CC05CX1R5(2)      | CCR05CX1R5(2)(1)(7) |
| 1.6  | C05(6)G169(2)2G5C(1) | CC05CX1R6(2)      | CCR05CX1R6(2)(1)(7) |
| 1.8  | C05(6)G189(2)2G5C(1) | CC05CX1R8(2)      | CCR05CX1R8(2)(1)(7) |
| 2.0  | C05(6)G209(2)2G5C(1) | CC05CX2R0(2)      | CCR05CX2R0(2)(1)(7) |
| 2.2  | C05(6)G229(2)2G5C(1) | CC05CX2R2(2)      | CCR05CX2R2(2)(1)(7) |
| 2.4  | C05(6)G249(2)2G5C(1) | CC05CX2R4(2)      | CCR05CX2R4(2)(1)(7) |
| 2.7  | C05(6)G279(2)2G5C(1) | CC05CX2R7(3)      | CCR05CX2R7(3)(1)(7) |
| 3.0  | C05(6)G309(2)2G5C(1) | CC05CX3R0(3)      | CCR05CX3R0(3)(1)(7) |
| 3.3  | C05(6)G339(2)2G5C(1) | CC05CX3R3(3)      | CCR05CX3R3(3)(1)(7) |
| 3.6  | C05(6)G369(2)2G5C(1) | CC05CX3R6(3)      | CCR05CX3R6(3)(1)(7) |
| 3.9  | C05(6)G399(2)2G5C(1) | CC05CX3R9(3)      | CCR05CX3R9(3)(1)(7) |
| 4.3  | C05(6)G439(2)2G5C(1) | CC05CJ4R3(3)      | CCR05CJ4R3(3)(1)(7) |
| 4.7  | C05(6)G479(2)2G5C(1) | CC05CJ4R7(3)      | CCR05CJ4R7(3)(1)(7) |
| 5.1  | C05(6)G519(2)2G5C(1) | CC05CJ5R1(3)      | CCR05CJ5R1(3)(1)(7) |
| 5.6  | C05(6)G569(2)2G5C(1) | CC05CJ5R6(3)      | CCR05CJ5R6(3)(1)(7) |
| 6.2  | C05(6)G629(2)2G5C(1) | CC05CJ6R2(3)      | CCR05CJ6R2(3)(1)(7) |
| 6.8  | C05(6)G689(2)2G5C(1) | CC05CJ6R8(3)      | CCR05CJ6R8(3)(1)(7) |
| 7.5  | C05(6)G759(2)2G5C(1) | CC05CJ7R5(3)      | CCR05CJ7R5(3)(1)(7) |
| 8.2  | C05(6)G829(2)2G5C(1) | CC05CH8R2(3)      | CCR05CH8R2(3)(1)(7) |
| 9.1  | C05(6)G919(2)2G5C(1) | CC05CH9R1(3)      | CCR05CH9R1(3)(1)(7) |
| 10.0   | C05(6)G100(4)2G5C(1) | CC05CH100(4)      | CCR05CH100(4)(1)(7) |
| 11.0   | C05(6)G110(4)2G5C(1) | CC05CH110(4)      | CCR05CH110(4)(1)(7) |
| 12.0   | C05(6)G120(4)2G5C(1) | CC05CH120(4)      | CCR05CH120(4)(1)(7) |
| 13.0   | C05(6)G130(4)2G5C(1) | CC05CH130(4)      | CCR05CH130(4)(1)(7) |
| 15.0   | C05(6)G150(4)2G5C(1) | CC05CH150(4)      | CCR05CH150(4)(1)(7) |
| 16.0   | C05(6)G160(4)2G5C(1) | CC05CH160(4)      | CCR05CH160(4)(1)(7) |
| 18.0   | C05(6)G180(4)2G5C(1) | CC05CH180(4)      | CCR05CH180(4)(1)(7) |
| 20.0   | C05(6)G200(4)2G5C(1) | CC05CG200(4)      | CCR05CG200(4)(1)(7) |
| 22.0   | C05(6)G220(4)2G5C(1) | CC05CG220(4)      | CCR05CG220(4)(1)(7) |
| 24.0   | C05(6)G240(4)2G5C(1) | CC05CG240(4)      | CCR05CG240(4)(1)(7) |
| 27.0   | C05(6)G270(4)2G5C(1) | CC05CG270(4)      | CCR05CG270(4)(1)(7) |
| 30.0   | C05(6)G300(4)2G5C(1) | CC05CG300(4)      | CCR05CG300(4)(1)(7) |
| 33.0   | C05(6)G330(4)2G5C(1) | CC05CG330(4)      | CCR05CG330(4)(1)(7) |
| 36.0   | C05(6)G360(4)2G5C(1) | CC05CG360(4)      | CCR05CG360(4)(1)(7) |
| 39.0   | C05(6)G390(4)2G5C(1) | CC05CG390(4)      | CCR05CG390(4)(1)(7) |
| 43.0   | C05(6)G430(4)2G5C(1) | CC05CG430(4)      | CCR05CG430(4)(1)(7) |
| 47.0   | C05(6)G470(4)2G5C(1) | CC05CG470(4)      | CCR05CG470(4)(1)(7) |
| 51.0   | C05(6)G510(4)2G5C(1) | CC05CG510(4)      | CCR05CG510(4)(1)(7) |

| CAP. pF  | KEMET PART NUMBER    | MILITARY STYLE CC | MILITARY STYLE CCR  |
|--|----------------------|-------------------|---------------------|
| <b>200 VOLT — C052/C056 SIZE (CC(R)05 PER MIL-PRF-20/35)</b> |                      |                   |                     |
| 56.0   | C05(6)G560(4)2G5C(1) | CC05CG560(4)      | CCR05CG560(4)(1)(7) |
| 62.0   | C05(6)G620(4)2G5C(1) | CC05CG620(4)      | CCR05CG620(4)(1)(7) |
| 68.0   | C05(6)G680(4)2G5C(1) | CC05CG680(4)      | CCR05CG680(4)(1)(7) |
| 75.0   | C05(6)G750(4)2G5C(1) | CC05CG750(4)      | CCR05CG750(4)(1)(7) |
| 82.0   | C05(6)G820(4)2G5C(1) | CC05CG820(4)      | CCR05CG820(4)(1)(7) |
| 91.0   | C05(6)G910(4)2G5C(1) | CC05CG910(4)      | CCR05CG910(4)(1)(7) |
| 100.0  | C05(6)G101(4)2G5C(1) | CC05CG101(4)      | CCR05CG101(4)(1)(7) |
| 110.0  | C05(6)G111(4)2G5C(1) | CC05CG111(4)      | CCR05CG111(4)(1)(7) |
| 120.0  | C05(6)G121(4)2G5C(1) | CC05CG121(4)      | CCR05CG121(4)(1)(7) |
| 130.0  | C05(6)G131(4)2G5C(1) | CC05CG131(4)      | CCR05CG131(4)(1)(7) |
| 150.0  | C05(6)G151(4)2G5C(1) | CC05CG151(4)      | CCR05CG151(4)(1)(7) |
| 160.0  | C05(6)G161(4)2G5C(1) | CC05CG161(4)      | CCR05CG161(4)(1)(7) |
| 180.0  | C05(6)G181(4)2G5C(1) | CC05CG181(4)      | CCR05CG181(4)(1)(7) |
| 200.0  | C05(6)G201(4)2G5C(1) | CC05CG201(4)      | CCR05CG201(4)(1)(7) |
| 220.0  | C05(6)G221(4)2G5C(1) | CC05CG221(4)      | CCR05CG221(4)(1)(7) |
| 240.0  | C05(6)G241(4)2G5C(1) | CC05CG241(4)      | CCR05CG241(4)(1)(7) |
| 270.0  | C05(6)G271(4)2G5C(1) | CC05CG271(4)      | CCR05CG271(4)(1)(7) |
| 300.0  | C05(6)G301(4)2G5C(1) | CC05CG301(4)      | CCR05CG301(4)(1)(7) |
| 330.0  | C05(6)G331(4)2G5C(1) | CC05CG331(4)      | CCR05CG331(4)(1)(7) |
| <b>100 VOLT — C052/C056 SIZE (CC(R)05 PER MIL-PRF-20/35)</b> |                      |                   |                     |
| 360.0  | C05(6)G361(4)1G5C(1) | CC05CG361(4)      | CCR05CG361(4)(1)(7) |
| 390.0  | C05(6)G391(4)1G5C(1) | CC05CG391(4)      | CCR05CG391(4)(1)(7) |
| 430.0  | C05(6)G431(4)1G5C(1) | CC05CG431(4)      | CCR05CG431(4)(1)(7) |
| 470.0  | C05(6)G471(4)1G5C(1) | CC05CG471(4)      | CCR05CG471(4)(1)(7) |
| 510.0  | C05(6)G511(4)1G5C(1) | CC05CG511(4)      | CCR05CG511(4)(1)(7) |
| 560.0  | C05(6)G561(4)1G5C(1) | CC05CG561(4)      | CCR05CG561(4)(1)(7) |
| 620.0  | C05(6)G621(4)1G5C(1) | CC05CG621(4)      | CCR05CG621(4)(1)(7) |
| 680.0  | C05(6)G681(4)1G5C(1) | CC05CG681(4)      | CCR05CG681(4)(1)(7) |
| 750.0  | C05(6)G751(4)1G5C(1) | CC05CG751(4)      | CCR05CG751(4)(1)(7) |
| 820.0  | C05(6)G821(4)1G5C(1) | CC05CG821(4)      | CCR05CG821(4)(1)(7) |
| 910.0  | C05(6)G911(4)1G5C(1) | CC05CG911(4)      | CCR05CG911(4)(1)(7) |
| 1,000.0  | C05(6)G102(4)1G5C(1) | CC05CG102(4)      | CCR05CG102(4)(1)(7) |
| 1,100.0  | C05(6)G112(4)1G5C(1) | CC05CG112(4)      | CCR05CG112(4)(1)(7) |
| 1,200.0  | C05(6)G122(4)1G5C(1) | CC05CG122(4)      | CCR05CG122(4)(1)(7) |
| 1,300.0  | C05(6)G132(4)1G5C(1) | CC05CG132(4)      | CCR05CG132(4)(1)(7) |
| 1,500.0  | C05(6)G152(4)1G5C(1) | CC05CG152(4)      | CCR05CG152(4)(1)(7) |
| 1,600.0  | C05(6)G162(4)1G5C(1) | CC05CG162(4)      | CCR05CG162(4)(1)(7) |
| 1,800.0  | C05(6)G182(4)1G5C(1) | CC05CG182(4)      | CCR05CG182(4)(1)(7) |
| <b>50 VOLT — C052/C056 SIZE (CC(R)05 PER MIL-PRF-20/35)</b>  |                      |                   |                     |
| 2,000.0  | C05(6)G202(4)5G5C(1) | CC05CG202(4)      | CCR05CG202(4)(1)(7) |
| 2,200.0  | C05(6)G222(4)5G5C(1) | CC05CG222(4)      | CCR05CG222(4)(1)(7) |
| 2,400.0  | C05(6)G242(4)5G5C(1) | CC05CG242(4)      | CCR05CG242(4)(1)(7) |
| 2,700.0  | C05(6)G272(4)5G5C(1) | CC05CG272(4)      | CCR05CG272(4)(1)(7) |
| 3,000.0  | C05(6)G302(4)5G5C(1) | CC05CG302(4)      | CCR05CG302(4)(1)(7) |
| 3,300.0  | C05(6)G332(4)5G5C(1) | CC05CG332(4)      | CCR05CG332(4)(1)(7) |

To complete Part Number, insert the following letters:

- (1) Available Failure Rates: A (CC styles only); M, P, R & S (CCR styles only).
- (2) Available Capacitance Tolerances: B, C.
- (3) Available Capacitance Tolerances: B, C, D.
- (4) Available Capacitance Tolerances: F, G, J.
- (5) Available Capacitance Tolerances: F, G, J, K.
- (6) Insert "2" for standard design, Style C052G
- Insert "6" for stand-off design, Style C056G
- (7) Add "V" for stand-off design, Style C056G

} Stand-offs are available only as CCR's, not available as CC.

And leave blank for the flat bottom design (C052G)


## RATINGS & PART NUMBER REFERENCE

| CAP. pF  | KEMET PART NUMBER    | MILITARY STYLE CC | MILITARY STYLE CCR  |
|--|----------------------|-------------------|---------------------|
| <b>200 VOLT – C062/C066 SIZE (CC(R)06 PER MIL-PRF-20/36)</b> |                      |                   |                     |
| 360.0  | C06(6)G361(4)2G5C(1) | CC06CG361(4)      | CCR06CG361(4)(1)(Z) |
| 390.0  | C06(6)G391(4)2G5C(1) | CC06CG391(4)      | CCR06CG391(4)(1)(Z) |
| 430.0  | C06(6)G431(4)2G5C(1) | CC06CG431(4)      | CCR06CG431(4)(1)(Z) |
| 470.0  | C06(6)G471(4)2G5C(1) | CC06CG471(4)      | CCR06CG471(4)(1)(Z) |
| 510.0  | C06(6)G511(4)2G5C(1) | CC06CG511(4)      | CCR06CG511(4)(1)(Z) |
| 560.0  | C06(6)G561(4)2G5C(1) | CC06CG561(4)      | CCR06CG561(4)(1)(Z) |
| 620.0  | C06(6)G621(4)2G5C(1) | CC06CG621(4)      | CCR06CG621(4)(1)(Z) |
| 680.0  | C06(6)G681(4)2G5C(1) | CC06CG681(4)      | CCR06CG681(4)(1)(Z) |
| 750.0  | C06(6)G751(4)2G5C(1) | CC06CG751(4)      | CCR06CG751(4)(1)(Z) |
| 820.0  | C06(6)G821(4)2G5C(1) | CC06CG821(4)      | CCR06CG821(4)(1)(Z) |
| 910.0  | C06(6)G911(4)2G5C(1) | CC06CG911(4)      | CCR06CG911(4)(1)(Z) |
| 1,000.0  | C06(6)G102(4)2G5C(1) | CC06CG102(4)      | CCR06CG102(4)(1)(Z) |
| 1,100.0  | C06(6)G112(4)2G5C(1) | CC06CG112(4)      | CCR06CG112(4)(1)(Z) |
| 1,200.0  | C06(6)G122(4)2G5C(1) | CC06CG122(4)      | CCR06CG122(4)(1)(Z) |
| 1,300.0  | C06(6)G132(4)2G5C(1) | CC06CG132(4)      | CCR06CG132(4)(1)(Z) |
| 1,500.0  | C06(6)G152(4)2G5C(1) | CC06CG152(4)      | CCR06CG152(4)(1)(Z) |
| 1,600.0  | C06(6)G162(4)2G5C(1) | CC06CG162(4)      | CCR06CG162(4)(1)(Z) |
| 1,800.0  | C06(6)G182(4)2G5C(1) | CC06CG182(4)      | CCR06CG182(4)(1)(Z) |
| <b>100 VOLT – C062/C066 SIZE (CC(R)06 PER MIL-PRF-20/36)</b> |                      |                   |                     |
| 2,000.0  | C06(6)G202(4)1G5C(1) | CC06CG202(4)      | CCR06CG202(4)(1)(Z) |
| 2,200.0  | C06(6)G222(4)1G5C(1) | CC06CG222(4)      | CCR06CG222(4)(1)(Z) |
| 2,400.0  | C06(6)G242(4)1G5C(1) | CC06CG242(4)      | CCR06CG242(4)(1)(Z) |
| 2,700.0  | C06(6)G272(4)1G5C(1) | CC06CG272(4)      | CCR06CG272(4)(1)(Z) |
| 3,000.0  | C06(6)G302(4)1G5C(1) | CC06CG302(4)      | CCR06CG302(4)(1)(Z) |
| 3,300.0  | C06(6)G332(4)1G5C(1) | CC06CG332(4)      | CCR06CG332(4)(1)(Z) |
| 3,600.0  | C06(6)G362(4)1G5C(1) | CC06CG362(4)      | CCR06CG362(4)(1)(Z) |
| 3,900.0  | C06(6)G392(4)1G5C(1) | CC06CG392(4)      | CCR06CG392(4)(1)(Z) |
| 4,300.0  | C06(6)G432(4)1G5C(1) | CC06CG432(4)      | CCR06CG432(4)(1)(Z) |
| 4,700.0  | C06(6)G472(4)1G5C(1) | CC06CG472(4)      | CCR06CG472(4)(1)(Z) |
| <b>50 VOLT – C062/C066 SIZE (CC(R)06 PER MIL-PRF-20/36)</b>  |                      |                   |                     |
| 5,100.0  | C06(6)G512(5)5G5C(1) | CC06CG512(5)      | CCR06CG512(5)(1)(Z) |
| 5,600.0  | C06(6)G562(5)5G5C(1) | CC06CG562(5)      | CCR06CG562(5)(1)(Z) |
| 6,200.0  | C06(6)G622(5)5G5C(1) | CC06CG622(5)      | CCR06CG622(5)(1)(Z) |
| 6,800.0  | C06(6)G682(5)5G5C(1) | CC06CG682(5)      | CCR06CG682(5)(1)(Z) |
| 7,500.0  | C06(6)G752(5)5G5C(1) | CC06CG752(5)      | CCR06CG752(5)(1)(Z) |

| CAP. pF   | KEMET PART NUMBER    | MILITARY STYLE CC | MILITARY STYLE CCR  |
|---|----------------------|-------------------|---------------------|
| <b>50 VOLT – C062/C066 SIZE (CC(R)06 PER MIL-PRF-20/36)</b> |                      |                   |                     |
| 8,200.0   | C06(6)G822(5)5G5C(1) | CC06CG822(5)      | CCR06CG822(5)(1)(Z) |
| 9,100.0   | C06(6)G912(5)5G5C(1) | CC06CG912(5)      | CCR06CG912(5)(1)(Z) |
| 10,000.0  | C06(6)G103(5)5G5C(1) | CC06CG103(5)      | CCR06CG103(5)(1)(Z) |
| 12,000.0  | C06(6)G123(5)5G5C(1) | CC06CG123(5)      | CCR06CG123(5)(1)(Z) |
| 15,000.0  | C06(6)G153(5)5G5C(1) | CC06CG153(5)      | CCR06CG153(5)(1)(Z) |
| 18,000.0  | C06(6)G183(5)5G5C(1) | CC06CG183(5)      | CCR06CG183(5)(1)(Z) |
| <b>200 VOLT – C512 SIZE (CC(R)07 PER MIL-PRF-20/37)</b>     |                      |                   |                     |
| 2,200.0   | C512G222(5)2G5C(1)   | CC07CG222(5)      | CCR07CG222(5)(1)    |
| 2,700.0   | C512G272(5)2G5C(1)   | CC07CG272(5)      | CCR07CG272(5)(1)    |
| 3,300.0   | C512G332(5)2G5C(1)   | CC07CG332(5)      | CCR07CG332(5)(1)    |
| 3,900.0   | C512G392(5)2G5C(1)   | CC07CG392(5)      | CCR07CG392(5)(1)    |
| 4,700.0   | C512G472(5)2G5C(1)   | CC07CG472(5)      | CCR07CG472(5)(1)    |
| <b>100 VOLT – C512 SIZE (CC(R)07 PER MIL-PRF-20/37)</b>     |                      |                   |                     |
| 5,600.0   | C512G562(5)1G5C(1)   | CC07CG562(5)      | CCR07CG562(5)(1)    |
| 6,800.0   | C512G682(5)1G5C(1)   | CC07CG682(5)      | CCR07CG682(5)(1)    |
| 8,200.0   | C512G822(5)1G5C(1)   | CC07CG822(5)      | CCR07CG822(5)(1)    |
| 10,000.0  | C512G103(5)1G5C(1)   | CC07CG103(5)      | CCR07CG103(5)(1)    |
| 12,000.0  | C512G123(5)1G5C(1)   | CC07CG123(5)      | CCR07CG123(5)(1)    |
| <b>50 VOLT – C512 SIZE (CC(R)07 PER MIL-PRF-20/37)</b>      |                      |                   |                     |
| 15,000.0  | C512G153(5)5G5C(1)   | CC07CG153(5)      | CCR07CG153(5)(1)    |
| 18,000.0  | C512G183(5)5G5C(1)   | CC07CG183(5)      | CCR07CG183(5)(1)    |
| 22,000.0  | C512G223(5)5G5C(1)   | CC07CG223(5)      | CCR07CG223(5)(1)    |
| 27,000.0  | C512G273(5)5G5C(1)   | CC07CG273(5)      | CCR07CG273(5)(1)    |
| 33,000.0  | C512G333(5)5G5C(1)   | CC07CG333(5)      | CCR07CG333(5)(1)    |
| 39,000.0  | C512G393(5)5G5C(1)   | CC07CG393(5)      | CCR07CG393(5)(1)    |
| 47,000.0  | C512G473(5)5G5C(1)   | CC07CG473(5)      | CCR07CG473(5)(1)    |
| 56,000.0  | C512G563(5)5G5C(1)   | CC07CG563(5)      | CCR07CG563(5)(1)    |
| 68,000.0  | C512G683(5)5G5C(1)   | CC07CG683(5)      | CCR07CG683(5)(1)    |
| 83,000.0  | C512G823(5)5G5C(1)   | CC07CG823(5)      | CCR07CG823(5)(1)    |
| 100,000.0   | C512G104(5)5G5C(1)   | CC07CG104(5)      | CCR07CG104(5)(1)    |
| <b>200 VOLT – C522 SIZE (CC(R)08 PER MIL-PRF-20/38)</b>     |                      |                   |                     |
| 3,900.0   | C522G392(8)2G5C(1)   | CC08CG392(8)      | CCR08CG392(8)(1)    |
| 4,700.0   | C522G472(8)2G5C(1)   | CC08CG472(8)      | CCR08CG472(8)(1)    |
| <b>100 VOLT – C522 SIZE (CC(R)08 PER MIL-PRF-20/38)</b>     |                      |                   |                     |
| 15,000.0  | C522G153(8)1G5C(1)   | CC08CG153(8)      | CCR08CG153(8)(1)    |
| 18,000.0  | C522G183(8)1G5C(1)   | CC08CG183(8)      | CCR08CG183(8)(1)    |
| <b>50 VOLT – C522 SIZE (CC(R)08 PER MIL-PRF-20/38)</b>      |                      |                   |                     |
| 56,000.0  | C522G563(8)5G5C(1)   | CC08CG563(8)      | CCR08CG563(8)(1)    |
| 68,000.0  | C522G683(8)5G5C(1)   | CC08CG683(8)      | CCR08CG683(8)(1)    |

- To complete Part Number, insert the following letters:
- (1) Available Failure Rates: A (CC styles only); M, P, R & S (CCR styles only).
  - (2) Available Capacitance Tolerances: B, C.
  - (3) Available Capacitance Tolerances: B, C, D.
  - (4) Available Capacitance Tolerances: F, G, J.
  - (5) Available Capacitance Tolerances: F, G, J, K.
  - (6) Insert "2" for standard design, Style C062G  
 Insert "6" for stand-off design, Style C066G } Stand-offs are available only as CCR's, not available as CC.
  - (7) Add "V" for stand-off design, Style C066G  
 And leave blank for the flat bottom design (C062G)
  - (8) Available Capacitance Tolerances: G, J, K


## CAPACITOR OUTLINE DRAWINGS (AXIAL LEADS)

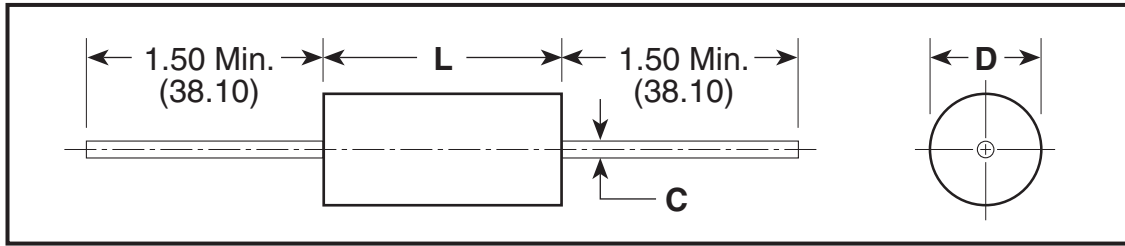

## DIMENSIONS – INCHES & (MILLIMETERS)

| CASE SIZE | MILITARY EQUIVALENT STYLES | L                         | D                        | C                                    |
|-----------|----------------------------|---------------------------|--------------------------|--------------------------------------|
| C114      | CK12, CKR11                | .160 ± .010 (4.06 ± .25)  | .090 ± .010 (2.29 ± .25) | .020, +.000, -.003 (.51, +.00, -.08) |
| C124      | CK13, CKR12                | .250 ± .010 (6.35 ± .25)  | .090 ± .010 (2.29 ± .25) | .020, +.000, -.003 (.51, +.00, -.08) |
| C192      | CK14, CKR14                | .390 ± .010 (9.91 ± .25)  | .140 ± .010 (3.56 ± .25) | .025, +.002, -.002 (.64, +.05, -.05) |
| C202      | CK15, CKR15                | .500 ± .020 (12.70 ± .51) | .250 ± .015 (6.35 ± .38) | .025, +.002, -.002 (.64, +.05, -.05) |
| C222      | CK16, CKR16                | .690 ± .030 (17.53 ± .76) | .350 ± .020 (8.89 ± .51) | .025, +.002, -.002 (.64, +.05, -.05) |

## CAPACITOR OUTLINE DRAWINGS (RADIAL LEADS)

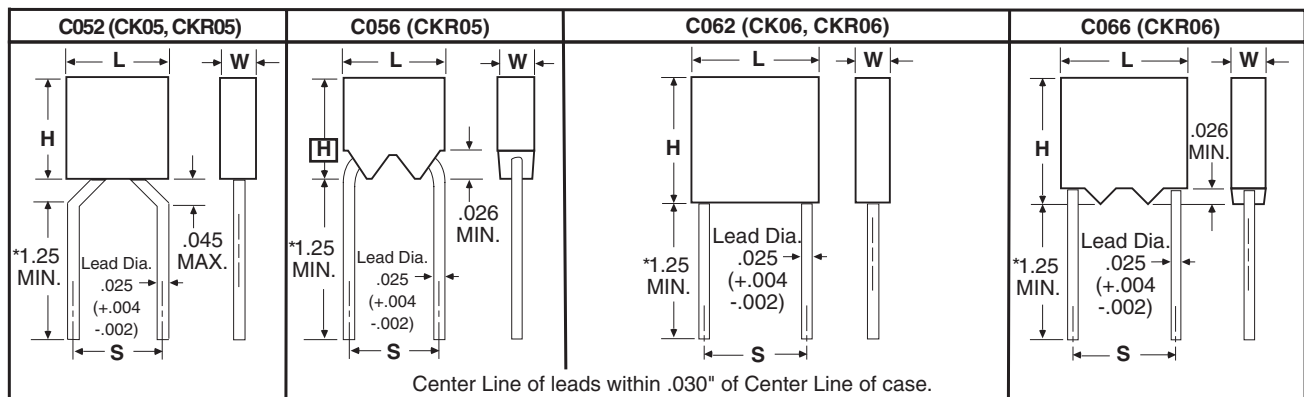


\* Leads are .625 minimum when tape and reel packaged.

## DIMENSIONS – INCHES & (MILLIMETERS)

| CASE SIZE     | MILITARY EQUIVALENT STYLES | H HEIGHT                 | L LENGTH                 | W WIDTH                  | S LEAD SPACING           |
|---------------|----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| C052/<br>C056 | CK05, CKR05                | .190 ± .010 (4.83 ± .25) | .190 ± .010 (4.83 ± .25) | .090 ± .010 (2.29 ± .25) | .200 ± .015 (5.08 ± .38) |
| C062/<br>C066 | CK06, CKR06                | .290 ± .010 (7.37 ± .25) | .290 ± .010 (7.37 ± .25) | .090 ± .010 (2.29 ± .25) | .200 ± .015 (5.08 ± .38) |

### ORDERING INFORMATION

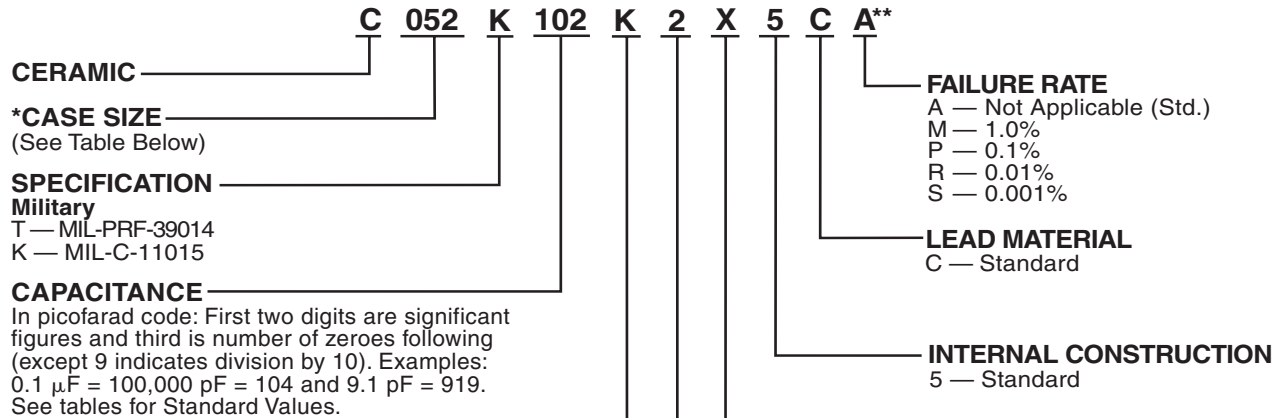

| TEMPERATURE CHARACTERISTIC |                     |                |                               |                                  |                                    |
|----------------------------|---------------------|----------------|-------------------------------|----------------------------------|------------------------------------|
| KEMET Designator           | Military Equivalent | EIA Equivalent | Capacitance Change With Temp. |                                  |                                    |
|                            |                     |                | Temp. Range, °C               | Measured Without DC Bias Voltage | Measured With Bias (Rated Voltage) |
| X (Stable)                 | BX                  | X7R            | -55 to +125                   | $\pm 15\%$                       | +15%<br>-25%                       |
| R (Stable)                 | BR                  | X7R            | -55 to +125                   | $\pm 15\%$                       | +15%<br>-40%                       |

Standard tolerances for each Series are shown in the repetitive parts lists.


| *CASE SIZES |       |
|-------------|-------|
| RADIAL      | AXIAL |
| C052        | C114  |
| C056        | C124  |
| C062        | C192  |
| C066        | C202  |
|             | C222  |

\*\*Part Number Example: C052K102K2X5CA (14 digits – no spaces)


### MARKING INFORMATION

#### C114T (CKR11) THROUGH C222T (CKR16) PER MIL-PRF-39014


##### C114T (CKR11)

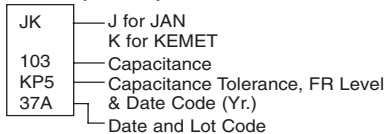


##### C124T (CKR12)

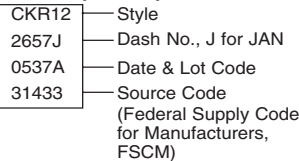


##### C192T (CKR14) C202T (CKR15) C222T (CKR16)

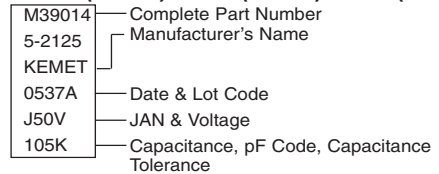

#### C052/56T (CKR05) PER MIL-PRF-39014/01

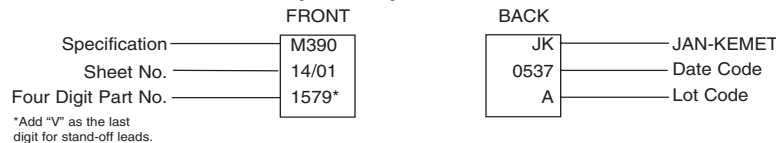


#### C062/66T (CKR06) PER MIL-PRF-39014/02

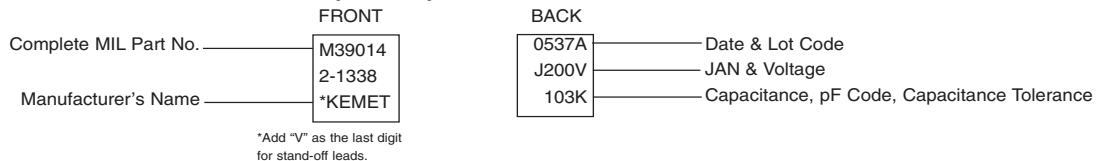


#### C114K (CK12) THROUGH C222K (CK16) PER MIL-C-11015


##### C114K (CK12) C124K (CK13)



##### C192K (CK14) C202K (CK15) C222K (CK16)



#### C052K (CK05) PER MIL-C-11015/18 & C062K (CK06) PER MIL-C-11015/19

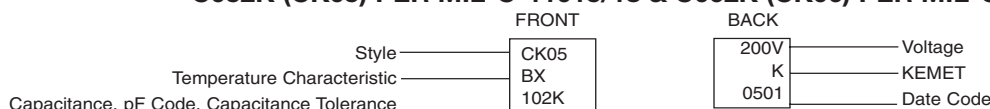





# CERAMIC MOLDED/AXIAL - MIL-C-11015 & MIL-PRF-39014 STABLE TEMPERATURE CHARACTERISTICS - BX & BR (EIA-X7R)

## RATINGS & PART NUMBER REFERENCE

| CAP.<br>pF   | TOL.<br>% | KEMET<br>PART NUMBER | MIL-C-11015/20 | MIL-PRF-39014/05 | MIL-PRF-39014/05 For Failure Rate Levels (2) |      |      |      |
|--|-----------|----------------------|----------------|------------------|--|------|------|------|
|  |           |                      |                |                  | M  | P    | R    | S    |
| <b>100 VOLT — C114 SIZE (MILITARY — CK12 or CKR11)</b> |           |                      |                |                  |  |      |      |      |
| 10   | 10        | C114(1)100K1X5C(2)   | CK12BX100K     | CKR11BX100K(2)   | 2601   | 2801 | 2001 | 2201 |
| 10   | 20        | C114(1)100M1X5C(2)   | CK12BX100M     | CKR11BX100M(2)   | 2602   | 2802 | 2002 | 2202 |
| 12   | 10        | C114(1)120K1X5C(2)   | CK12BX120K     | CKR11BX120K(2)   | 2603   | 2803 | 2003 | 2203 |
| 15   | 10        | C114(1)150K1X5C(2)   | CK12BX150K     | CKR11BX150K(2)   | 2604   | 2804 | 2004 | 2204 |
| 15   | 20        | C114(1)150M1X5C(2)   | CK12BX150M     | CKR11BX150M(2)   | 2605   | 2805 | 2005 | 2205 |
| 18   | 10        | C114(1)180K1X5C(2)   | CK12BX180K     | CKR11BX180K(2)   | 2606   | 2806 | 2006 | 2206 |
| 22   | 10        | C114(1)220K1X5C(2)   | CK12BX220K     | CKR11BX220K(2)   | 2607   | 2807 | 2007 | 2207 |
| 22   | 20        | C114(1)220M1X5C(2)   | CK12BX220M     | CKR11BX220M(2)   | 2608   | 2808 | 2008 | 2208 |
| 27   | 10        | C114(1)270K1X5C(2)   | CK12BX270K     | CKR11BX270K(2)   | 2609   | 2809 | 2009 | 2209 |
| 33   | 10        | C114(1)330K1X5C(2)   | CK12BX330K     | CKR11BX330K(2)   | 2610   | 2810 | 2010 | 2210 |
| 33   | 20        | C114(1)330M1X5C(2)   | CK12BX330M     | CKR11BX330M(2)   | 2611   | 2811 | 2011 | 2211 |
| 39   | 10        | C114(1)390K1X5C(2)   | CK12BX390K     | CKR11BX390K(2)   | 2612   | 2812 | 2012 | 2212 |
| 47   | 10        | C114(1)470K1X5C(2)   | CK12BX470K     | CKR11BX470K(2)   | 2613   | 2813 | 2013 | 2213 |
| 47   | 20        | C114(1)470M1X5C(2)   | CK12BX470M     | CKR11BX470M(2)   | 2614   | 2814 | 2014 | 2214 |
| 56   | 10        | C114(1)560K1X5C(2)   | CK12BX560K     | CKR11BX560K(2)   | 2615   | 2815 | 2015 | 2215 |
| 68   | 10        | C114(1)680K1X5C(2)   | CK12BX680K     | CKR11BX680K(2)   | 2616   | 2816 | 2016 | 2216 |
| 68   | 20        | C114(1)680M1X5C(2)   | CK12BX680M     | CKR11BX680M(2)   | 2617   | 2817 | 2017 | 2217 |
| 82   | 10        | C114(1)820K1X5C(2)   | CK12BX820K     | CKR11BX820K(2)   | 2618   | 2818 | 2018 | 2218 |
| 100  | 10        | C114(1)101K1X5C(2)   | CK12BX101K     | CKR11BX101K(2)   | 2619   | 2819 | 2019 | 2219 |
| 100  | 20        | C114(1)101M1X5C(2)   | CK12BX101M     | CKR11BX101M(2)   | 2620   | 2820 | 2020 | 2220 |
| 120  | 10        | C114(1)121K1X5C(2)   | CK12BX121K     | CKR11BX121K(2)   | 2621   | 2821 | 2021 | 2221 |
| 150  | 10        | C114(1)151K1X5C(2)   | CK12BX151K     | CKR11BX151K(2)   | 2622   | 2822 | 2022 | 2222 |
| 150  | 20        | C114(1)151M1X5C(2)   | CK12BX151M     | CKR11BX151M(2)   | 2623   | 2823 | 2023 | 2223 |
| 180  | 10        | C114(1)181K1X5C(2)   | CK12BX181K     | CKR11BX181K(2)   | 2624   | 2824 | 2024 | 2224 |
| 220  | 10        | C114(1)221K1X5C(2)   | CK12BX221K     | CKR11BX221K(2)   | 2625   | 2825 | 2025 | 2225 |
| 220  | 20        | C114(1)221M1X5C(2)   | CK12BX221M     | CKR11BX221M(2)   | 2626   | 2826 | 2026 | 2226 |
| 270  | 10        | C114(1)271K1X5C(2)   | CK12BX271K     | CKR11BX271K(2)   | 2627   | 2827 | 2027 | 2227 |
| 330  | 10        | C114(1)331K1X5C(2)   | CK12BX331K     | CKR11BX331K(2)   | 2628   | 2828 | 2028 | 2228 |
| 330  | 20        | C114(1)331M1X5C(2)   | CK12BX331M     | CKR11BX331M(2)   | 2629   | 2829 | 2029 | 2229 |
| 390  | 10        | C114(1)391K1X5C(2)   | CK12BX391K     | CKR11BX391K(2)   | 2630   | 2830 | 2030 | 2230 |
| 470  | 10        | C114(1)471K1X5C(2)   | CK12BX471K     | CKR11BX471K(2)   | 2631   | 2831 | 2031 | 2231 |
| 470  | 20        | C114(1)471M1X5C(2)   | CK12BX471M     | CKR11BX471M(2)   | 2632   | 2832 | 2032 | 2232 |
| 560  | 10        | C114(1)561K1X5C(2)   | CK12BX561K     | CKR11BX561K(2)   | 2633   | 2833 | 2033 | 2233 |
| 680  | 10        | C114(1)681K1X5C(2)   | CK12BX681K     | CKR11BX681K(2)   | 2634   | 2834 | 2034 | 2234 |
| 680  | 20        | C114(1)681M1X5C(2)   | CK12BX681M     | CKR11BX681M(2)   | 2635   | 2835 | 2035 | 2235 |
| 820  | 10        | C114(1)821K1X5C(2)   | CK12BX821K     | CKR11BX821K(2)   | 2636   | 2836 | 2036 | 2236 |
| 1,000  | 10        | C114(1)102K1X5C(2)   | CK12BX102K     | CKR11BX102K(2)   | 2637   | 2837 | 2037 | 2237 |
| 1,000  | 20        | C114(1)102M1X5C(2)   | CK12BX102M     | CKR11BX102M(2)   | 2638   | 2838 | 2038 | 2238 |
| 1,200  | 10        | C114(1)122K1X5C(2)   | CK12BX122K     | CKR11BX122K(2)   | 2639   | 2839 | 2039 | 2239 |
| 1,500  | 10        | C114(1)152K1X5C(2)   | CK12BX152K     | CKR11BX152K(2)   | 2640   | 2840 | 2040 | 2240 |
| 1,500  | 20        | C114(1)152M1X5C(2)   | CK12BX152M     | CKR11BX152M(2)   | 2641   | 2841 | 2041 | 2241 |
| 1,800  | 10        | C114(1)182K1X5C(2)   | CK12BX182K     | CKR11BX182K(2)   | 2642   | 2842 | 2042 | 2242 |
| 2,200  | 10        | C114(1)222K1X5C(2)   | CK12BX222K     | CKR11BX222K(2)   | 2643   | 2843 | 2043 | 2243 |
| 2,200  | 20        | C114(1)222M1X5C(2)   | CK12BX222M     | CKR11BX222M(2)   | 2644   | 2844 | 2044 | 2244 |
| 2,700  | 10        | C114(1)272K1X5C(2)   | CK12BX272K     | CKR11BX272K(2)   | 2645   | 2845 | 2045 | 2245 |
| 3,300  | 10        | C114(1)332K1X5C(2)   | CK12BX332K     | CKR11BX332K(2)   | 2646   | 2846 | 2046 | 2246 |
| 3,300  | 20        | C114(1)332M1X5C(2)   | CK12BX332M     | CKR11BX332M(2)   | 2647   | 2847 | 2047 | 2247 |
| 3,900  | 10        | C114(1)392K1X5C(2)   | CK12BX392K     | CKR11BX392K(2)   | 2648   | 2848 | 2048 | 2248 |
| 4,700  | 10        | C114(1)472K1X5C(2)   | CK12BX472K     | CKR11BX472K(2)   | 2649   | 2849 | 2049 | 2249 |
| 4,700  | 20        | C114(1)472M1X5C(2)   | CK12BX472M     | CKR11BX472M(2)   | 2650   | 2850 | 2050 | 2250 |
| <b>50 VOLT — C114 SIZE (MILITARY — CK12 or CKR11)</b>  |           |                      |                |                  |  |      |      |      |
| 5,600  | 10        | C114(1)562K5X5C(2)   | CK12BX562K     | CKR11BX562K(2)   | 2651   | 2851 | 2051 | 2251 |
| 6,800  | 10        | C114(1)682K5X5C(2)   | CK12BX682K     | CKR11BX682K(2)   | 2652   | 2852 | 2052 | 2252 |
| 6,800  | 20        | C114(1)682M5X5C(2)   | CK12BX682M     | CKR11BX682M(2)   | 2653   | 2853 | 2053 | 2253 |
| 8,200  | 10        | C114(1)822K5X5C(2)   | CK12BX822K     | CKR11BX822K(2)   | 2654   | 2854 | 2054 | 2254 |
| 10,000   | 10        | C114(1)103K5X5C(2)   | CK12BX103K     | CKR11BX103K(2)   | 2655   | 2855 | 2055 | 2255 |
| 10,000   | 20        | C114(1)103M5X5C(2)   | CK12BX103M     | CKR11BX103M(2)   | 2656   | 2856 | 2056 | 2256 |
| <b>100 VOLT — C124 SIZE (MILITARY — CK13 or CKR12)</b> |           |                      |                |                  |  |      |      |      |
| 5,600  | 10        | C124(1)562K1X5C(2)   | CK13BX562K     | CKR12BX562K(2)   | 2657   | 2857 | 2057 | 2257 |
| 6,800  | 10        | C124(1)682K1X5C(2)   | CK13BX682K     | CKR12BX682K(2)   | 2658   | 2858 | 2058 | 2258 |
| 6,800  | 20        | C124(1)682M1X5C(2)   | CK13BX682M     | CKR12BX682M(2)   | 2659   | 2859 | 2059 | 2259 |
| 8,200  | 10        | C124(1)822K1X5C(2)   | CK13BX822K     | CKR12BX822K(2)   | 2660   | 2860 | 2060 | 2260 |
| 10,000   | 10        | C124(1)103K1X5C(2)   | CK13BX103K     | CKR12BX103K(2)   | 2661   | 2861 | 2061 | 2261 |
| 10,000   | 20        | C124(1)103M1X5C(2)   | CK13BX103M     | CKR12BX103M(2)   | 2662   | 2862 | 2062 | 2262 |
| <b>50 VOLT — C124 SIZE (MILITARY — CK13 or CKR12)</b>  |           |                      |                |                  |  |      |      |      |
| 12,000   | 10        | C124(1)123K5X5C(2)   | CK13BX123K     | CKR12BX123K(2)   | 2663   | 2863 | 2063 | 2263 |
| 15,000   | 10        | C124(1)153K5X5C(2)   | CK13BX153K     | CKR12BX153K(2)   | 2664   | 2864 | 2064 | 2264 |
| 15,000   | 20        | C124(1)153M5X5C(2)   | CK13BX153M     | CKR12BX153M(2)   | 2665   | 2865 | 2065 | 2265 |
| 18,000   | 10        | C124(1)183K5X5C(2)   | CK13BX183K     | CKR12BX183K(2)   | 2666   | 2866 | 2066 | 2266 |
| 22,000   | 10        | C124(1)223K5X5C(2)   | CK13BX223K     | CKR12BX223K(2)   | 2667   | 2867 | 2067 | 2267 |
| 22,000   | 20        | C124(1)223M5X5C(2)   | CK13BX223M     | CKR12BX223M(2)   | 2668   | 2868 | 2068 | 2268 |
| 27,000   | 10        | C124K273K5R5CA       | CK13BR273K     |                  |  |      |      |      |
| 33,000   | 10        | C124K333K5R5CA       | CK13BR333K     |                  |  |      |      |      |
| 33,000   | 20        | C124K333M5R5CA       | CK13BR333M     |                  |  |      |      |      |
| 39,000   | 10        | C124K393K5R5CA       | CK13BR393K     |                  |  |      |      |      |
| 47,000   | 10        | C124K473K5R5CA       | CK13BR473K     |                  |  |      |      |      |
| 47,000   | 20        | C124K473M5R5CA       | CK13BR473M     |                  |  |      |      |      |

(1) Insert proper letter for specification: K — MIL-C-11015; T — MIL-PRF-39014 (2) Failure Rate Designator: A — Not applicable (MIL-C-11015); M — 1%/1000 Hours, P — .1%/1000 Hours, R — .01%/1000 Hours, S — .001%/1000 Hours (MIL-PRF-39014)



# CERAMIC MOLDED/AXIAL - MIL-C-11015 & MIL-PRF-39014 STABLE TEMPERATURE CHARACTERISTICS - BX & BR (EIA-X7R)

## RATINGS & PART NUMBER REFERENCE

| CAP. pF  | TOL. % | KEMET PART NUMBER  | MIL-C-11015/20 | MIL-PRF-39014/05 | MIL-PRF-39014/05 For Failure Rate Levels (2) |      |      |      |
|--|--------|--------------------|----------------|------------------|--|------|------|------|
|  |        |                    |                |                  | M  | P    | R    | S    |
| <b>50 VOLT — C124 SIZE (MILITARY — CK13 or CKR12) (Cont'd)</b> |        |                    |                |                  |  |      |      |      |
| 27,000   | 10     | C124T273K5X5C(2)   |                | CKR12BX273K(2)   | 2669   | 2869 | 2069 | 2269 |
| 33,000   | 10     | C124T333K5X5C(2)   |                | CKR12BX333K(2)   | 2670   | 2870 | 2070 | 2270 |
| 33,000   | 20     | C124T333M5X5C(2)   |                | CKR12BX333M(2)   | 2671   | 2871 | 2071 | 2271 |
| 39,000   | 10     | C124T393K5X5C(2)   |                | CKR12BX393K(2)   | 2672   | 2872 | 2072 | 2272 |
| 47,000   | 10     | C124T473K5X5C(2)   |                | CKR12BX473K(2)   | 2673   | 2873 | 2073 | 2273 |
| 47,000   | 20     | C124T473M5X5C(2)   |                | CKR12BX473M(2)   | 2674   | 2874 | 2074 | 2274 |
| <b>100 VOLT — C192 SIZE (MILITARY — CK14 or CKR14)</b>         |        |                    |                |                  |  |      |      |      |
| 12,000   | 10     | C192(1)123K1X5C(2) | CK14BX123K     | CKR14BX123K(2)   | 2675   | 2875 | 2075 | 2275 |
| 15,000   | 10     | C192(1)153K1X5C(2) | CK14BX153K     | CKR14BX153K(2)   | 2676   | 2876 | 2076 | 2276 |
| 15,000   | 20     | C192(1)153M1X5C(2) | CK14BX153M     | CKR14BX153M(2)   | 2677   | 2877 | 2077 | 2277 |
| 18,000   | 10     | C192(1)183K1X5C(2) | CK14BX183K     | CKR14BX183K(2)   | 2678   | 2878 | 2078 | 2278 |
| 22,000   | 10     | C192(1)223K1X5C(2) | CK14BX223K     | CKR14BX223K(2)   | 2679   | 2879 | 2079 | 2279 |
| 22,000   | 20     | C192(1)223M1X5C(2) | CK14BX223M     | CKR14BX223M(2)   | 2680   | 2880 | 2080 | 2280 |
| 27,000   | 10     | C192(1)273K1X5C(2) | CK14BX273K     | CKR14BX273K(2)   | 2681   | 2881 | 2081 | 2281 |
| 33,000   | 10     | C192(1)333K1X5C(2) | CK14BX333K     | CKR14BX333K(2)   | 2682   | 2882 | 2082 | 2282 |
| 33,000   | 20     | C192(1)333M1X5C(2) | CK14BX333M     | CKR14BX333M(2)   | 2683   | 2883 | 2083 | 2283 |
| 39,000   | 10     | C192(1)393K1X5C(2) | CK14BX393K     | CKR14BX393K(2)   | 2684   | 2884 | 2084 | 2284 |
| 47,000   | 10     | C192(1)473K1X5C(2) | CK14BX473K     | CKR14BX473K(2)   | 2685   | 2885 | 2085 | 2285 |
| 47,000   | 20     | C192(1)473M1X5C(2) | CK14BX473M     | CKR14BX473M(2)   | 2686   | 2886 | 2086 | 2286 |
| 56,000   | 10     | C192(1)563K1R5C(2) | CK14BR563K     | CKR14BR563K(2)   | 2693   | 2893 | 2093 | 2293 |
| 68,000   | 10     | C192(1)683K1R5C(2) | CK14BR683K     | CKR14BR683K(2)   | 2694   | 2894 | 2094 | 2294 |
| 68,000   | 20     | C192(1)683M1R5C(2) | CK14BR683M     | CKR14BR683M(2)   | 2695   | 2895 | 2095 | 2295 |
| 82,000   | 10     | C192(1)823K1R5C(2) | CK14BR823K     | CKR14BR823K(2)   | 2696   | 2896 | 2096 | 2296 |
| 100,000  | 10     | C192(1)104K1R5C(2) | CK14BR104K     | CKR14BR104K(2)   | 2697   | 2897 | 2097 | 2297 |
| 100,000  | 20     | C192(1)104M1R5C(2) | CK14BR104M     | CKR14BR104M(2)   | 2698   | 2898 | 2098 | 2298 |
| <b>50 VOLT — C192 SIZE (MILITARY — CK14 or CKR14)</b>          |        |                    |                |                  |  |      |      |      |
| 56,000   | 10     | C192T563K5X5C(2)   |                | CKR14BX563K(2)   | 2687   | 2887 | 2087 | 2287 |
| 68,000   | 10     | C192T683K5X5C(2)   |                | CKR14BX683K(2)   | 2688   | 2888 | 2088 | 2288 |
| 68,000   | 20     | C192T683M5X5C(2)   |                | CKR14BX683M(2)   | 2689   | 2889 | 2089 | 2289 |
| 82,000   | 10     | C192T823K5X5C(2)   |                | CKR14BX823K(2)   | 2690   | 2890 | 2090 | 2290 |
| 100,000  | 10     | C192T104K5X5C(2)   |                | CKR14BX104K(2)   | 2691   | 2891 | 2091 | 2291 |
| 100,000  | 20     | C192T104M5X5C(2)   |                | CKR14BX104M(2)   | 2692   | 2892 | 2092 | 2292 |
| 120,000  | 10     | C192(1)124K5R5C(2) | CK14BR124K     | CKR14BR124K(2)   | 2699   | 2899 | 2099 | 2299 |
| 150,000  | 10     | C192(1)154K5R5C(2) | CK14BR154K     | CKR14BR154K(2)   | 2700   | 2900 | 2100 | 2300 |
| 150,000  | 20     | C192(1)154M5R5C(2) | CK14BR154M     | CKR14BR154M(2)   | 2701   | 2901 | 2101 | 2301 |
| 180,000  | 10     | C192(1)184K5R5C(2) | CK14BR184K     | CKR14BR184K(2)   | 2702   | 2902 | 2102 | 2302 |
| 220,000  | 10     | C192(1)224K5R5C(2) | CK14BR224K     | CKR14BR224K(2)   | 2703   | 2903 | 2103 | 2303 |
| 220,000  | 20     | C192(1)224M5R5C(2) | CK14BR224M     | CKR14BR224M(2)   | 2704   | 2904 | 2104 | 2304 |
| 270,000  | 10     | C192(1)274K5R5C(2) | CK14BR274K     | CKR14BR274K(2)   | 2705   | 2905 | 2105 | 2305 |
| <b>100 VOLT — C202 SIZE (MILITARY — CK15 or CKR15)</b>         |        |                    |                |                  |  |      |      |      |
| 56,000   | 10     | C202T563K1X5C(2)   |                | CKR15BX563K(2)   | 2706   | 2906 | 2106 | 2306 |
| 68,000   | 10     | C202T683K1X5C(2)   |                | CKR15BX683K(2)   | 2707   | 2907 | 2107 | 2307 |
| 68,000   | 20     | C202T683M1X5C(2)   |                | CKR15BX683M(2)   | 2708   | 2908 | 2108 | 2308 |
| 82,000   | 10     | C202T823K1X5C(2)   |                | CKR15BX823K(2)   | 2709   | 2909 | 2109 | 2309 |
| 100,000  | 10     | C202(1)104K1X5C(2) | CK15BX104K     | CKR15BX104K(2)   | 2710   | 2910 | 2110 | 2310 |
| 100,000  | 20     | C202(1)104M1X5C(2) | CK15BX104M     | CKR15BX104M(2)   | 2711   | 2911 | 2111 | 2311 |
| 120,000  | 10     | C202(1)124K1R5C(2) | CK15BR124K     | CKR15BR124K(2)   | 2712   | 2912 | 2112 | 2312 |
| 150,000  | 10     | C202(1)154K1R5C(2) | CK15BR154K     | CKR15BR154K(2)   | 2713   | 2913 | 2113 | 2313 |
| 150,000  | 20     | C202(1)154M1R5C(2) | CK15BR154M     | CKR15BR154M(2)   | 2714   | 2914 | 2114 | 2314 |
| 180,000  | 10     | C202(1)184K1R5C(2) | CK15BR184K     | CKR15BR184K(2)   | 2715   | 2915 | 2115 | 2315 |
| 220,000  | 10     | C202(1)224K1R5C(2) | CK15BR224K     | CKR15BR224K(2)   | 2716   | 2916 | 2116 | 2316 |
| 220,000  | 20     | C202(1)224M1R5C(2) | CK15BR224M     | CKR15BR224M(2)   | 2717   | 2917 | 2117 | 2317 |
| 270,000  | 10     | C202(1)274K1R5C(2) | CK15BR274K     | CKR15BR274K(2)   | 2718   | 2918 | 2118 | 2318 |
| 330,000  | 10     | C202(1)334K1R5C(2) | CK15BR334K     | CKR15BR334K(2)   | 2719   | 2919 | 2119 | 2319 |
| 330,000  | 20     | C202(1)334M1R5C(2) | CK15BR334M     | CKR15BR334M(2)   | 2720   | 2920 | 2120 | 2320 |
| <b>50 VOLT — C202 SIZE (MILITARY — CK15 or CKR15)</b>          |        |                    |                |                  |  |      |      |      |
| 470,000  | 10     | C202(1)474K5R5C(2) | CK15BR474K     | CKR15BR474K(2)   | 2721   | 2921 | 2121 | 2321 |
| 470,000  | 20     | C202(1)474M5R5C(2) | CK15BR474M     | CKR15BR474M(2)   | 2722   | 2922 | 2122 | 2322 |
| 680,000  | 10     | C202T684K5R5C(2)   |                | CKR15BR684K(2)   | 2723   | 2923 | 2123 | 2323 |
| 680,000  | 20     | C202T684M5R5C(2)   |                | CKR15BR684M(2)   | 2724   | 2924 | 2124 | 2324 |
| 1,000,000  | 10     | C202(1)105K5R5C(2) | CK15BR105K     | CKR15BR105K(2)   | 2725   | 2925 | 2125 | 2325 |
| 1,000,000  | 20     | C202(1)105M5R5C(2) | CK15BR105M     | CKR15BR105M(2)   | 2726   | 2926 | 2126 | 2326 |
| <b>100 VOLT — C222 SIZE (MILITARY — CK16 or CKR16)</b>         |        |                    |                |                  |  |      |      |      |
| 470,000  | 10     | C222(1)474K1R5C(2) | CK16BR474K     | CKR16BR474K(2)   | 2727   | 2927 | 2127 | 2327 |
| 470,000  | 20     | C222(1)474M1R5C(2) | CK16BR474M     | CKR16BR474M(2)   | 2728   | 2928 | 2128 | 2328 |
| 680,000  | 10     | C222T684K1R5C(2)   |                | CKR16BR684K(2)   | 2729   | 2929 | 2129 | 2329 |
| 680,000  | 20     | C222T684M1R5C(2)   |                | CKR16BR684M(2)   | 2730   | 2930 | 2130 | 2330 |
| 1,000,000  | 10     | C222(1)105K1R5C(2) | CK16BR105K     | CKR16BR105K(2)   | 2731   | 2931 | 2131 | 2331 |
| 1,000,000  | 20     | C222(1)105M1R5C(2) | CK16BR105M     | CKR16BR105M(2)   | 2732   | 2932 | 2132 | 2332 |
| <b>50 VOLT — C222 SIZE (MILITARY — CK16 or CKR16)</b>          |        |                    |                |                  |  |      |      |      |
| 2,200,000  | 10     | C222(1)225K5R5C(2) | CK16BR225K     | CKR16BR225K(2)   | 2733   | 2933 | 2133 | 2333 |
| 2,200,000  | 20     | C222(1)225M5R5C(2) | CK16BR225M     | CKR16BR225M(2)   | 2734   | 2934 | 2134 | 2334 |
| 3,300,000  | 10     | C222(1)335K5R5C(2) | CK16BR335M     | CKR16BR335K(2)   | 2735   | 2935 | 2135 | 2335 |
| 3,300,000  | 20     | C222(1)335M5R5C(2) | CK16BR335M     | CKR16BR335M(2)   | 2736   | 2936 | 2136 | 2336 |

(1) Insert proper letter for specification: K — MIL-C-11015; T — MIL-PRF-39014 (2) Failure Rate Designator: A — Not applicable (MIL-C-11015); M — 1%/1000 Hours, P — .1%/1000 Hours, R — .01%/1000 Hours, S — .001%/1000 Hours (MIL-PRF-39014)



# CERAMIC MOLDED/RADIAL - MIL-C-11015 & MIL-PRF-39014 STABLE TEMPERATURE CHARACTERISTICS - BX & BR (EIA-X7R)

## RATINGS & PART NUMBER REFERENCE

| CAP. pF   | TOL. % | KEMET PART NUMBER    | MIL-C-11015/18 | MIL-PRF-39014/01  | MIL-PRF-39014/01 For Failure Rate Levels (2) |         |         |         |
|---|--------|----------------------|----------------|-------------------|--|---------|---------|---------|
|   |        |                      |                |                   | M  | P       | R       | S       |
| <b>200 VOLT — C052/C056 SIZE (MILITARY — CK05 or CKR05)</b> |        |                      |                |                   |  |         |         |         |
| 10  | 10     | C05(4)(1)100K2X5C(2) | CK05BX100K     | CKR05BX100K(2)(3) | 1201(3)                                      | 1241(3) | 1281(3) | 1321(3) |
| 10  | 20     | C05(4)(1)100M2X5C(2) | CK05BX100M     | CKR05BX100M(2)(3) | 1202(3)                                      | 1242(3) | 1282(3) | 1322(3) |
| 12  | 10     | C05(4)(1)120K2X5C(2) | CK05BX120K     | CKR05BX120K(2)(3) | 1203(3)                                      | 1243(3) | 1283(3) | 1323(3) |
| 15  | 10     | C05(4)(1)150K2X5C(2) | CK05BX150K     | CKR05BX150K(2)(3) | 1204(3)                                      | 1244(3) | 1284(3) | 1324(3) |
| 15  | 20     | C05(4)(1)150M2X5C(2) | CK05BX150M     | CKR05BX150M(2)(3) | 1205(3)                                      | 1245(3) | 1285(3) | 1325(3) |
| 18  | 10     | C05(4)(1)180K2X5C(2) | CK05BX180K     | CKR05BX180K(2)(3) | 1206(3)                                      | 1246(3) | 1286(3) | 1326(3) |
| 22  | 10     | C05(4)(1)220K2X5C(2) | CK05BX220K     | CKR05BX220K(2)(3) | 1207(3)                                      | 1247(3) | 1287(3) | 1327(3) |
| 22  | 20     | C05(4)(1)220M2X5C(2) | CK05BX220M     | CKR05BX220M(2)(3) | 1208(3)                                      | 1248(3) | 1288(3) | 1328(3) |
| 27  | 10     | C05(4)(1)270K2X5C(2) | CK05BX270K     | CKR05BX270K(2)(3) | 1209(3)                                      | 1249(3) | 1289(3) | 1329(3) |
| 33  | 10     | C05(4)(1)330K2X5C(2) | CK05BX330K     | CKR05BX330K(2)(3) | 1210(3)                                      | 1250(3) | 1290(3) | 1330(3) |
| 33  | 20     | C05(4)(1)330M2X5C(2) | CK05BX330M     | CKR05BX330M(2)(3) | 1211(3)                                      | 1251(3) | 1291(3) | 1331(3) |
| 39  | 10     | C05(4)(1)390K2X5C(2) | CK05BX390K     | CKR05BX390K(2)(3) | 1212(3)                                      | 1252(3) | 1292(3) | 1332(3) |
| 47  | 10     | C05(4)(1)470K2X5C(2) | CK05BX470K     | CKR05BX470K(2)(3) | 1213(3)                                      | 1253(3) | 1293(3) | 1333(3) |
| 47  | 20     | C05(4)(1)470M2X5C(2) | CK05BX470M     | CKR05BX470M(2)(3) | 1214(3)                                      | 1254(3) | 1294(3) | 1334(3) |
| 56  | 10     | C05(4)(1)560K2X5C(2) | CK05BX560K     | CKR05BX560K(2)(3) | 1215(3)                                      | 1255(3) | 1295(3) | 1335(3) |
| 68  | 10     | C05(4)(1)680K2X5C(2) | CK05BX680K     | CKR05BX680K(2)(3) | 1216(3)                                      | 1256(3) | 1296(3) | 1336(3) |
| 68  | 20     | C05(4)(1)680M2X5C(2) | CK05BX680M     | CKR05BX680M(2)(3) | 1217(3)                                      | 1257(3) | 1297(3) | 1337(3) |
| 82  | 10     | C05(4)(1)820K2X5C(2) | CK05BX820K     | CKR05BX820K(2)(3) | 1218(3)                                      | 1258(3) | 1298(3) | 1338(3) |
| 100   | 10     | C05(4)(1)101K2X5C(2) | CK05BX101K     | CKR05BX101K(2)(3) | 1219(3)                                      | 1259(3) | 1299(3) | 1339(3) |
| 100   | 20     | C05(4)(1)101M2X5C(2) | CK05BX101M     | CKR05BX101M(2)(3) | 1220(3)                                      | 1260(3) | 1300(3) | 1340(3) |
| 120   | 10     | C05(4)(1)121K2X5C(2) | CK05BX121K     | CKR05BX121K(2)(3) | 1221(3)                                      | 1261(3) | 1301(3) | 1341(3) |
| 150   | 10     | C05(4)(1)151K2X5C(2) | CK05BX151K     | CKR05BX151K(2)(3) | 1222(3)                                      | 1262(3) | 1302(3) | 1342(3) |
| 150   | 20     | C05(4)(1)151M2X5C(2) | CK05BX151M     | CKR05BX151M(2)(3) | 1223(3)                                      | 1263(3) | 1303(3) | 1343(3) |
| 180   | 10     | C05(4)(1)181K2X5C(2) | CK05BX181K     | CKR05BX181K(2)(3) | 1224(3)                                      | 1264(3) | 1304(3) | 1344(3) |
| 220   | 10     | C05(4)(1)221K2X5C(2) | CK05BX221K     | CKR05BX221K(2)(3) | 1225(3)                                      | 1265(3) | 1305(3) | 1345(3) |
| 220   | 20     | C05(4)(1)221M2X5C(2) | CK05BX221M     | CKR05BX221M(2)(3) | 1226(3)                                      | 1266(3) | 1306(3) | 1346(3) |
| 270   | 10     | C05(4)(1)271K2X5C(2) | CK05BX271K     | CKR05BX271K(2)(3) | 1227(3)                                      | 1267(3) | 1307(3) | 1347(3) |
| 330   | 10     | C05(4)(1)331K2X5C(2) | CK05BX331K     | CKR05BX331K(2)(3) | 1228(3)                                      | 1268(3) | 1308(3) | 1348(3) |
| 330   | 20     | C05(4)(1)331M2X5C(2) | CK05BX331M     | CKR05BX331M(2)(3) | 1229(3)                                      | 1269(3) | 1309(3) | 1349(3) |
| 390   | 10     | C05(4)(1)391K2X5C(2) | CK05BX391K     | CKR05BX391K(2)(3) | 1230(3)                                      | 1270(3) | 1310(3) | 1350(3) |
| 470   | 10     | C05(4)(1)471K2X5C(2) | CK05BX471K     | CKR05BX471K(2)(3) | 1231(3)                                      | 1271(3) | 1311(3) | 1351(3) |
| 470   | 20     | C05(4)(1)471M2X5C(2) | CK05BX471M     | CKR05BX471M(2)(3) | 1232(3)                                      | 1272(3) | 1312(3) | 1352(3) |
| 560   | 10     | C05(4)(1)561K2X5C(2) | CK05BX561K     | CKR05BX561K(2)(3) | 1233(3)                                      | 1273(3) | 1313(3) | 1353(3) |
| 680   | 10     | C05(4)(1)681K2X5C(2) | CK05BX681K     | CKR05BX681K(2)(3) | 1234(3)                                      | 1274(3) | 1314(3) | 1354(3) |
| 680   | 20     | C05(4)(1)681M2X5C(2) | CK05BX681M     | CKR05BX681M(2)(3) | 1235(3)                                      | 1275(3) | 1315(3) | 1355(3) |
| 820   | 10     | C05(4)(1)821K2X5C(2) | CK05BX821K     | CKR05BX821K(2)(3) | 1236(3)                                      | 1276(3) | 1316(3) | 1356(3) |
| 1,000   | 10     | C05(4)(1)102K2X5C(2) | CK05BX102K     | CKR05BX102K(2)(3) | 1237(3)                                      | 1277(3) | 1317(3) | 1357(3) |
| 1,000   | 20     | C05(4)(1)102M2X5C(2) | CK05BX102M     | CKR05BX102M(2)(3) | 1238(3)                                      | 1278(3) | 1318(3) | 1358(3) |
| <b>100 VOLT — C052/C056 SIZE (MILITARY — CK05 or CKR05)</b> |        |                      |                |                   |  |         |         |         |
| 1,200   | 10     | C05(4)(1)122K1X5C(2) | CK05BX122K     | CKR05BX122K(2)(3) | 1239(3)                                      | 1279(3) | 1319(3) | 1359(3) |
| 1,500   | 10     | C05(4)(1)152K1X5C(2) | CK05BX152K     | CKR05BX152K(2)(3) | 1240(3)                                      | 1280(3) | 1320(3) | 1360(3) |
| 1,500   | 20     | C05(4)(1)152M1X5C(2) | CK05BX152M     | CKR05BX152M(2)(3) | 1441(3)                                      | 1481(3) | 1521(3) | 1561(3) |
| 1,800   | 10     | C05(4)(1)182K1X5C(2) | CK05BX182K     | CKR05BX182K(2)(3) | 1442(3)                                      | 1482(3) | 1522(3) | 1562(3) |
| 2,200   | 10     | C05(4)(1)222K1X5C(2) | CK05BX222K     | CKR05BX222K(2)(3) | 1443(3)                                      | 1483(3) | 1523(3) | 1563(3) |
| 2,200   | 20     | C05(4)(1)222M1X5C(2) | CK05BX222M     | CKR05BX222M(2)(3) | 1444(3)                                      | 1484(3) | 1524(3) | 1564(3) |
| 2,700   | 10     | C05(4)(1)272K1X5C(2) | CK05BX272K     | CKR05BX272K(2)(3) | 1445(3)                                      | 1485(3) | 1525(3) | 1565(3) |
| 3,300   | 10     | C05(4)(1)332K1X5C(2) | CK05BX332K     | CKR05BX332K(2)(3) | 1446(3)                                      | 1486(3) | 1526(3) | 1566(3) |
| 3,300   | 20     | C05(4)(1)332M1X5C(2) | CK05BX332M     | CKR05BX332M(2)(3) | 1447(3)                                      | 1487(3) | 1527(3) | 1567(3) |
| 3,900   | 10     | C05(4)(1)392K1X5C(2) | CK05BX392K     | CKR05BX392K(2)(3) | 1448(3)                                      | 1488(3) | 1528(3) | 1568(3) |
| 4,700   | 10     | C05(4)(1)472K1X5C(2) | CK05BX472K     | CKR05BX472K(2)(3) | 1449(3)                                      | 1489(3) | 1529(3) | 1569(3) |
| 4,700   | 20     | C05(4)(1)472M1X5C(2) | CK05BX472M     | CKR05BX472M(2)(3) | 1450(3)                                      | 1490(3) | 1530(3) | 1570(3) |
| 5,600   | 10     | C05(4)(1)562K1X5C(2) | CK05BX562K     | CKR05BX562K(2)(3) | 1451(3)                                      | 1491(3) | 1531(3) | 1571(3) |
| 6,800   | 10     | C05(4)(1)682K1X5C(2) | CK05BX682K     | CKR05BX682K(2)(3) | 1452(3)                                      | 1492(3) | 1532(3) | 1572(3) |
| 6,800   | 20     | C05(4)(1)682M1X5C(2) | CK05BX682M     | CKR05BX682M(2)(3) | 1453(3)                                      | 1493(3) | 1533(3) | 1573(3) |
| 8,200   | 10     | C05(4)(1)822K1X5C(2) | CK05BX822K     | CKR05BX822K(2)(3) | 1454(3)                                      | 1494(3) | 1534(3) | 1574(3) |
| 10,000  | 10     | C05(4)(1)103K1X5C(2) | CK05BX103K     | CKR05BX103K(2)(3) | 1455(3)                                      | 1495(3) | 1535(3) | 1575(3) |
| 10,000  | 20     | C05(4)(1)103M1X5C(2) | CK05BX103M     | CKR05BX103M(2)(3) | 1456(3)                                      | 1496(3) | 1536(3) | 1576(3) |
| <b>50 VOLT — C052/C056 SIZE (MILITARY — CK05 or CKR05)</b>  |        |                      |                |                   |  |         |         |         |
| 12,000  | 10     | C05(4)(1)123K5X5C(2) | CK05BX123K     | CKR05BX123K(2)(3) | 1457(3)                                      | 1497(3) | 1537(3) | 1577(3) |
| 15,000  | 10     | C05(4)(1)153K5X5C(2) | CK05BX153K     | CKR05BX153K(2)(3) | 1458(3)                                      | 1498(3) | 1538(3) | 1578(3) |
| 15,000  | 20     | C05(4)(1)153M5X5C(2) | CK05BX153M     | CKR05BX153M(2)(3) | 1459(3)                                      | 1499(3) | 1539(3) | 1579(3) |
| 18,000  | 10     | C05(4)(1)183K5X5C(2) | CK05BX183K     | CKR05BX183K(2)(3) | 1460(3)                                      | 1500(3) | 1540(3) | 1580(3) |
| 22,000  | 10     | C05(4)(1)223K5X5C(2) | CK05BX223K     | CKR05BX223K(2)(3) | 1461(3)                                      | 1501(3) | 1541(3) | 1581(3) |
| 22,000  | 20     | C05(4)(1)223M5X5C(2) | CK05BX223M     | CKR05BX223M(2)(3) | 1462(3)                                      | 1502(3) | 1542(3) | 1582(3) |
| 27,000  | 10     | C05(4)(1)273K5X5C(2) | CK05BX273K     | CKR05BX273K(2)(3) | 1463(3)                                      | 1503(3) | 1543(3) | 1583(3) |
| 33,000  | 10     | C05(4)(1)333K5X5C(2) | CK05BX333K     | CKR05BX333K(2)(3) | 1464(3)                                      | 1504(3) | 1544(3) | 1584(3) |
| 33,000  | 20     | C05(4)(1)333M5X5C(2) | CK05BX333M     | CKR05BX333M(2)(3) | 1465(3)                                      | 1505(3) | 1545(3) | 1585(3) |
| 39,000  | 10     | C05(4)(1)393K5X5C(2) | CK05BX393K     | CKR05BX393K(2)(3) | 1466(3)                                      | 1506(3) | 1546(3) | 1586(3) |
| 47,000  | 10     | C05(4)(1)473K5X5C(2) | CK05BX473K     | CKR05BX473K(2)(3) | 1467(3)                                      | 1507(3) | 1547(3) | 1587(3) |
| 47,000  | 20     | C05(4)(1)473M5X5C(2) | CK05BX473M     | CKR05BX473M(2)(3) | 1468(3)                                      | 1508(3) | 1548(3) | 1588(3) |
| 56,000  | 10     | C05(4)(1)563K5X5C(2) | CK05BX563K     | CKR05BX563K(2)(3) | 1469(3)                                      | 1509(3) | 1549(3) | 1589(3) |
| 68,000  | 10     | C05(4)(1)683K5X5C(2) | CK05BX683K     | CKR05BX683K(2)(3) | 1470(3)                                      | 1510(3) | 1550(3) | 1590(3) |
| 68,000  | 20     | C05(4)(1)683M5X5C(2) | CK05BX683M     | CKR05BX683M(2)(3) | 1471(3)                                      | 1511(3) | 1551(3) | 1591(3) |
| 82,000  | 10     | C05(4)(1)823K5X5C(2) | CK05BX823K     | CKR05BX823K(2)(3) | 1472(3)                                      | 1512(3) | 1552(3) | 1592(3) |
| 100,000   | 10     | C05(4)(1)104K5X5C(2) | CK05BX104K     | CKR05BX104K(2)(3) | 1473(3)                                      | 1513(3) | 1553(3) | 1593(3) |
| 100,000   | 20     | C05(4)(1)104M5X5C(2) | CK05BX104M     | CKR05BX104M(2)(3) | 1474(3)                                      | 1514(3) | 1554(3) | 1594(3) |

(1) Insert proper letter for specification: K — MIL-C-11015; T — MIL-PRF-39014 (2) Failure Rate Designator: A — Not applicable (MIL-C-11015); M — 1%/1000 Hours, P — .1%/1000 Hours, R — .01%/1000 Hours, S — .001%/1000 Hours (MIL-PRF-39014)  
 (3) Insert "V" for standard design (C056). Leave blank for the flat bottom design (C052).  
 (4) Insert "2" for standard design (Style C052) } Note: Stand-offs are available only with the CKR, not the CK.  
 Insert "6" for stand-off design (Style C056)



# CERAMIC MOLDED/RADIAL - MIL-C-11015 & MIL-PRF-39014 STABLE TEMPERATURE CHARACTERISTICS - BX & BR (EIA-X7R)

## RATINGS & PART NUMBER REFERENCE

| CAP.<br>pF  | TOL.<br>% | KEMET<br>PART NUMBER | MIL-C-11015/19 | MIL-PRF-39014/02  | MIL-PRF-39014/02 For Failure Rate Levels (2) |         |         |         |
|---|-----------|----------------------|----------------|-------------------|--|---------|---------|---------|
|   |           |                      |                |                   | M  | P       | R       | S       |
| <b>200 VOLT — C062/C066 SIZE (MILITARY — CK06 or CKR06)</b> |           |                      |                |                   |  |         |         |         |
| 1,200   | 10        | C06(4)(1)122K2X5C(2) | CK06BX122K     | CKR06BX122K(2)(3) | 1201(3)                                      | 1241(3) | 1281(3) | 1321(3) |
| 1,500   | 10        | C06(4)(1)152K2X5C(2) | CK06BX152K     | CKR06BX152K(2)(3) | 1202(3)                                      | 1242(3) | 1282(3) | 1322(3) |
| 1,500   | 20        | C06(4)(1)152M2X5C(2) | CK06BX152M     | CKR06BX152M(2)(3) | 1203(3)                                      | 1243(3) | 1283(3) | 1323(3) |
| 1,800   | 10        | C06(4)(1)182K2X5C(2) | CK06BX182K     | CKR06BX182K(2)(3) | 1204(3)                                      | 1244(3) | 1284(3) | 1324(3) |
| 2,200   | 10        | C06(4)(1)222K2X5C(2) | CK06BX222K     | CKR06BX222K(2)(3) | 1206(3)                                      | 1246(3) | 1286(3) | 1326(3) |
| 2,200   | 20        | C06(4)(1)222M2X5C(2) | CK06BX222M     | CKR06BX222M(2)(3) | 1207(3)                                      | 1247(3) | 1287(3) | 1327(3) |
| 2,700   | 10        | C06(4)(1)272K2X5C(2) | CK06BX272K     | CKR06BX272K(2)(3) | 1208(3)                                      | 1248(3) | 1288(3) | 1328(3) |
| 3,300   | 10        | C06(4)(1)332K2X5C(2) | CK06BX332K     | CKR06BX332K(2)(3) | 1209(3)                                      | 1249(3) | 1289(3) | 1329(3) |
| 3,300   | 20        | C06(4)(1)332M2X5C(2) | CK06BX332M     | CKR06BX332M(2)(3) | 1210(3)                                      | 1250(3) | 1290(3) | 1330(3) |
| 3,900   | 10        | C06(4)(1)392K2X5C(2) | CK06BX392K     | CKR06BX392K(2)(3) | 1211(3)                                      | 1251(3) | 1291(3) | 1331(3) |
| 4,700   | 10        | C06(4)(1)472K2X5C(2) | CK06BX472K     | CKR06BX472K(2)(3) | 1212(3)                                      | 1252(3) | 1292(3) | 1332(3) |
| 4,700   | 20        | C06(4)(1)472M2X5C(2) | CK06BX472M     | CKR06BX472M(2)(3) | 1213(3)                                      | 1253(3) | 1293(3) | 1333(3) |
| 5,600   | 10        | C06(4)(1)562K2X5C(2) | CK06BX562K     | CKR06BX562K(2)(3) | 1214(3)                                      | 1254(3) | 1294(3) | 1334(3) |
| 6,800   | 10        | C06(4)(1)682K2X5C(2) | CK06BX682K     | CKR06BX682K(2)(3) | 1215(3)                                      | 1255(3) | 1295(3) | 1335(3) |
| 6,800   | 20        | C06(4)(1)682M2X5C(2) | CK06BX682M     | CKR06BX682M(2)(3) | 1216(3)                                      | 1256(3) | 1296(3) | 1336(3) |
| 8,200   | 10        | C06(4)(1)822K2X5C(2) | CK06BX822K     | CKR06BX822K(2)(3) | 1217(3)                                      | 1257(3) | 1297(3) | 1337(3) |
| 10,000  | 10        | C06(4)(1)103K2X5C(2) | CK06BX103K     | CKR06BX103K(2)(3) | 1218(3)                                      | 1258(3) | 1298(3) | 1338(3) |
| 10,000  | 20        | C06(4)(1)103M2X5C(2) | CK06BX103M     | CKR06BX103M(2)(3) | 1219(3)                                      | 1259(3) | 1299(3) | 1339(3) |
| <b>100 VOLT — C062/C066 SIZE (MILITARY — CK06 or CKR06)</b> |           |                      |                |                   |  |         |         |         |
| 12,000  | 10        | C06(4)(1)123K1X5C(2) | CK06BX123K     | CKR06BX123K(2)(3) | 1231(3)                                      | 1271(3) | 1311(3) | 1351(3) |
| 15,000  | 10        | C06(4)(1)153K1X5C(2) | CK06BX153K     | CKR06BX153K(2)(3) | 1220(3)                                      | 1260(3) | 1300(3) | 1340(3) |
| 15,000  | 20        | C062K153M1X5CA       | CK06BX153M     |                   |  |         |         |         |
| 18,000  | 10        | C06(4)(1)183K1X5C(2) | CK06BX183K     | CKR06BX183K(2)(3) | 1221(3)                                      | 1261(3) | 1301(3) | 1341(3) |
| 22,000  | 10        | C06(4)(1)223K1X5C(2) | CK06BX223K     | CKR06BX223K(2)(3) | 1222(3)                                      | 1262(3) | 1302(3) | 1342(3) |
| 22,000  | 20        | C062K223M1X5CA       | CK06BX223M     |                   |  |         |         |         |
| 27,000  | 10        | C06(4)(1)273K1X5C(2) | CK06BX273K     | CKR06BX273K(2)(3) | 1232(3)                                      | 1272(3) | 1312(3) | 1352(3) |
| 33,000  | 10        | C06(4)(1)333K1X5C(2) | CK06BX333K     | CKR06BX333K(2)(3) | 1223(3)                                      | 1263(3) | 1303(3) | 1343(3) |
| 33,000  | 20        | C062K333M1X5CA       | CK06BX333M     |                   |  |         |         |         |
| 39,000  | 10        | C06(4)(1)393K1X5C(2) | CK06BX393K     | CKR06BX393K(2)(3) | 1224(3)                                      | 1264(3) | 1304(3) | 1344(3) |
| 47,000  | 10        | C06(4)(1)473K1X5C(2) | CK06BX473K     | CKR06BX473K(2)(3) | 1225(3)                                      | 1265(3) | 1305(3) | 1345(3) |
| 47,000  | 20        | C062K473M1X5CA       | CK06BX473M     |                   |  |         |         |         |
| 56,000  | 10        | C06(4)(1)563K1X5C(2) | CK06BX563K     | CKR06BX563K(2)(3) | 1226(3)                                      | 1266(3) | 1306(3) | 1346(3) |
| 68,000  | 10        | C06(4)(1)683K1X5C(2) | CK06BX683K     | CKR06BX683K(2)(3) | 1227(3)                                      | 1267(3) | 1307(3) | 1347(3) |
| 68,000  | 20        | C062K683M1X5CA       | CK06BX683M     |                   |  |         |         |         |
| 82,000  | 10        | C06(4)(1)823K1X5C(2) | CK06BX823K     | CKR06BX823K(2)(3) | 1229(3)                                      | 1269(3) | 1309(3) | 1349(3) |
| 100,000   | 10        | C06(4)(1)104K1X5C(2) | CK06BX104K     | CKR06BX104K(2)(3) | 1230(3)                                      | 1270(3) | 1310(3) | 1350(3) |
| 100,000   | 20        | C062K104M1X5CA       | CK06BX104M     |                   |  |         |         |         |
| <b>50 VOLT — C062/C066 SIZE (MILITARY — CK06 or CKR06)</b>  |           |                      |                |                   |  |         |         |         |
| 120,000   | 10        | C06(4)(1)124K5X5C(2) | CK06BX124K     | CKR06BX124K(2)(3) | 1233(3)                                      | 1273(3) | 1313(3) | 1353(3) |
| 150,000   | 10        | C06(4)(1)154K5X5C(2) | CK06BX154K     | CKR06BX154K(2)(3) | 1234(3)                                      | 1274(3) | 1314(3) | 1354(3) |
| 150,000   | 20        | C062K154M5X5CA       | CK06BX154M     |                   |  |         |         |         |
| 180,000   | 10        | C06(4)(1)184K5X5C(2) | CK06BX184K     | CKR06BX184K(2)(3) | 1235(3)                                      | 1275(3) | 1315(3) | 1355(3) |
| 220,000   | 10        | C06(4)(1)224K5X5C(2) | CK06BX224K     | CKR06BX224K(2)(3) | 1236(3)                                      | 1276(3) | 1316(3) | 1356(3) |
| 220,000   | 20        | C062K224M5X5CA       | CK06BX224M     |                   |  |         |         |         |
| 270,000   | 10        | C06(4)(1)274K5X5C(2) | CK06BX274K     | CKR06BX274K(2)(3) | 1237(3)                                      | 1277(3) | 1317(3) | 1357(3) |
| 330,000   | 10        | C06(4)(1)334K5X5C(2) | CK06BX334K     | CKR06BX334K(2)(3) | 1238(3)                                      | 1278(3) | 1318(3) | 1358(3) |
| 330,000   | 20        | C062K334M5X5CA       | CK06BX334M     |                   |  |         |         |         |
| 390,000   | 10        | C06(4)(1)394K5X5C(2) | CK06BX394K     | CKR06BX394K(2)(3) | 1239(3)                                      | 1279(3) | 1319(3) | 1359(3) |
| 470,000   | 10        | C06(4)(1)474K5X5C(2) | CK06BX474K     | CKR06BX474K(2)(3) | 1240(3)                                      | 1280(3) | 1320(3) | 1360(3) |
| 470,000   | 20        | C062K474M5X5CA       | CK06BX474M     |                   |  |         |         |         |
| 560,000   | 10        | C06(4)(1)564K5X5C(2) | CK06BX564K     | CKR06BX564K(2)(3) | 1404(3)                                      | 1408(3) | 1412(3) | 1416(3) |
| 680,000   | 10        | C06(4)(1)684K5X5C(2) | CK06BX684K     | CKR06BX684K(2)(3) | 1405(3)                                      | 1409(3) | 1413(3) | 1417(3) |
| 680,000   | 20        | C062K684M5X5CA       | CK06BX684M     |                   |  |         |         |         |
| 820,000   | 10        | C06(4)(1)824K5X5C(2) | CK06BX824K     | CKR06BX824K(2)(3) | 1406(3)                                      | 1410(3) | 1414(3) | 1418(3) |
| 1,000,000   | 10        | C06(4)(1)105K5X5C(2) | CK06BX105K     | CKR06BX105K(2)(3) | 1407(3)                                      | 1411(3) | 1415(3) | 1419(3) |
| 1,000,000   | 20        | C062K105M5X5CA       | CK06BX105M     |                   |  |         |         |         |

(1) Insert proper letter for specification: K — MIL-C-11015; T — MIL-PRF-39014.  
 (2) Failure Rate Designator: A — Not applicable (MIL-C-11015); M — .1%/1000 Hours, P — .1%/1000 Hours, R — .01%/1000 Hours, S — .001%/1000 Hours (MIL-PRF-39014)  
 (3) Add "V" for stand-off design (C066). Leave blank for the flat bottom design (C062).  
 (4) Insert "2" for standard design (Style C062). Insert "6" for stand-off design (Style C066). Note: Stand-offs are available only with the CKR, not the CK.

**Ceramic Axial**  
Lead Tape and Reel Packaging

KEMET offers standard reeling of Molded and Conformally Coated Axial Leaded Ceramic Capacitors for automatic insertion or lead forming machines per EIA specification RS-296. KEMET'S internal specification four-digit suffix, 7200, is placed at the end of the part number to designate tape and reel packaging, ie: C114T103K5X5CR7200.

Paper (50 lb.) test minimum is inserted between the layers of capacitors wound on reels for component pitch  $\leq 0.400"$ . Capacitor lead length may extend only a maximum of  $.0625"$  (1.59mm) beyond the tapes' edges. Capacitors are centered in a row between the two tapes and will deviate only  $\pm 0.031$  (0.79mm) from the row center. A minimum of 36" (91.5 cm) leader tape is provided at each end of the reel capacitors. Universal splicing clips are used to connect the tape. Standard reel quantities are shown on page 21.

Figure 1

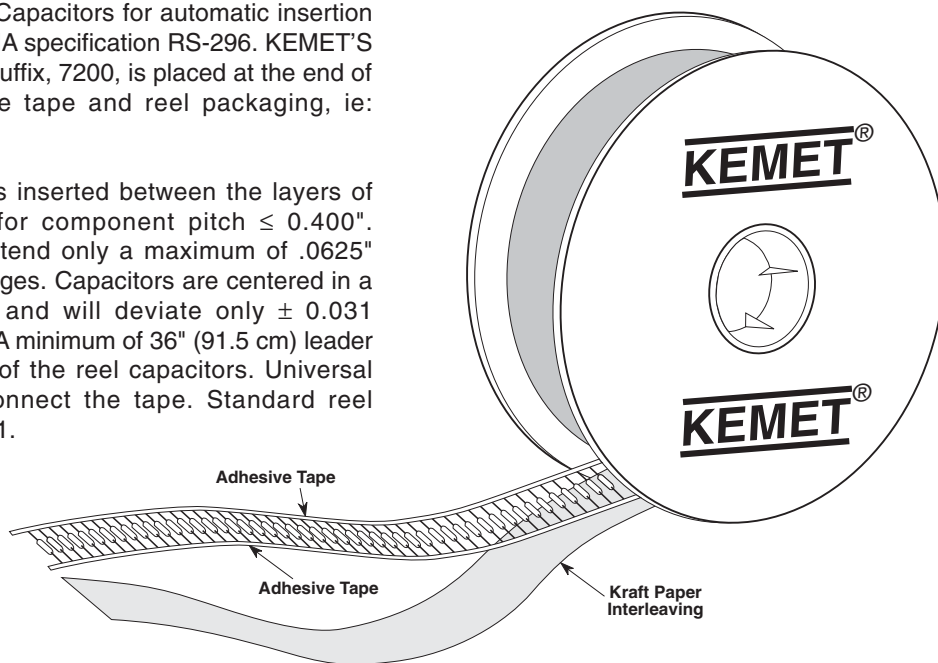


Figure 2

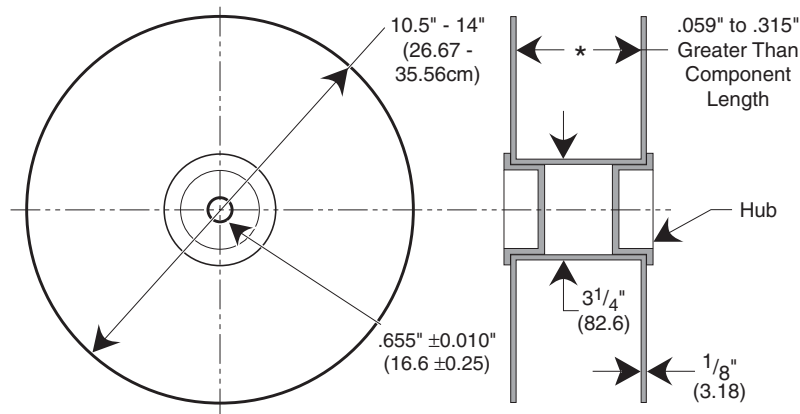


Figure 3


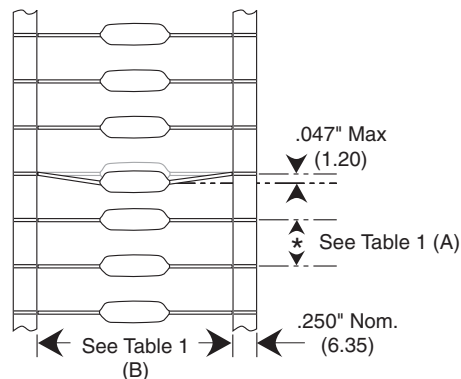


Table 1 Dimensions in Inches & (Millimeters)


| Component Body Diameter          | Component Pitch "A" | Inside Tape Spacing "B" $\pm 1.5\text{mm}$ (0.059") |               |
|----------------------------------|---------------------|---|---------------|
|                                  |                     | I   | III*          |
| 0" (0mm) to 0.197" (5mm)         | 0.197" or (5mm)     | 2.062" (52.4mm)                                     | 2.874" (73mm) |
| 0.197" (5.01mm) to 0.394" (10mm) | 0.394" or (10mm)    |   |               |

**Ceramic Radial  
Lead Tape and Reel Packaging**


KEMET offers standard reeling of Molded and Conformally Coated Radial Leaded Ceramic Capacitors for automatic insertion per EIA specification RS-468. Parts are taped to a tagboard carrier strip, and wound on a reel as shown in Figure 1. Kraft paper interleaving is inserted between the layers of capacitors on the reel. Ammopack is also available, with the same lead tape configuration and package quantities.

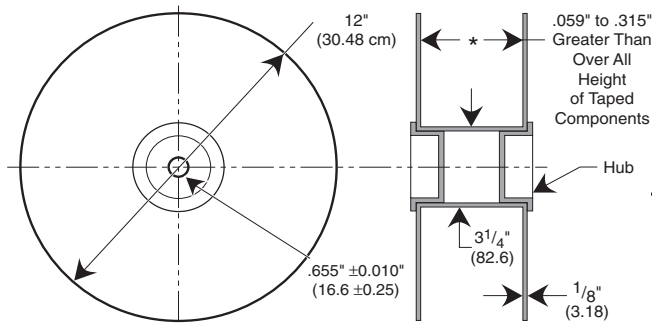

**Figure 3: Standard Reel**

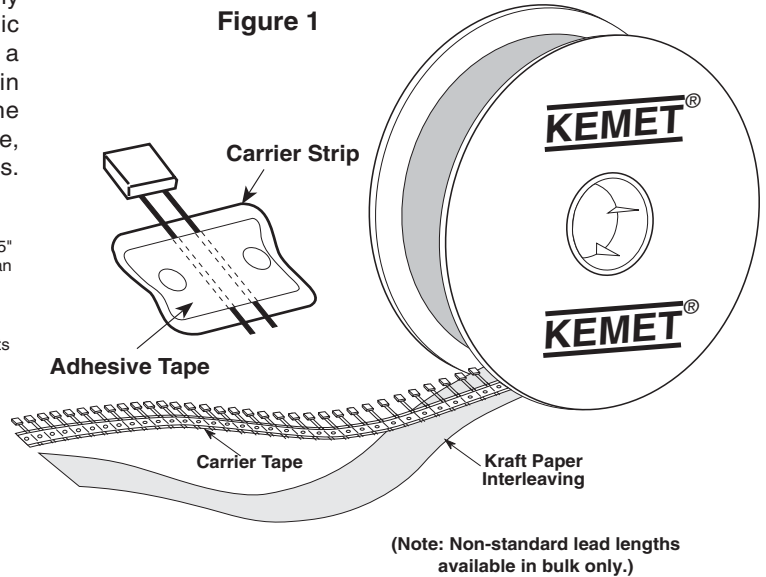

(Note: Non-standard lead lengths available in bulk only.)

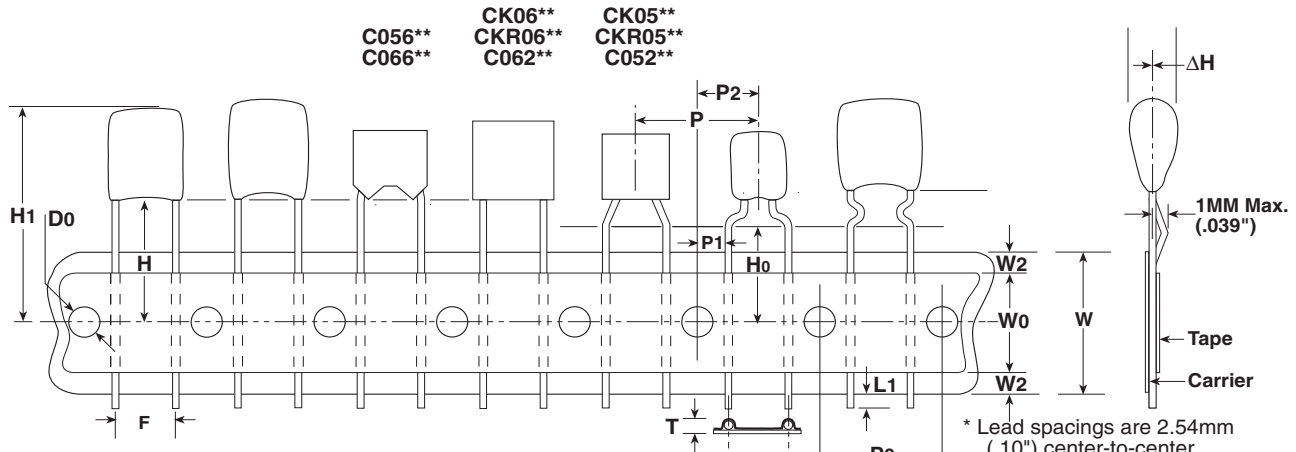

**Figure 2: Lead Tape Configuration (See Table Below)**

\* Lead spacings are 2.54mm (.10") center-to-center.  
\*\* Lead spacings are 5.08mm (.20") center-to-center.  
# See page 15 for exact lead configuration for Series.

**Ceramic Radial Tape and Reel Dimensions in Millimeters & (Inches)**

| Dimension                                    | Symbol | Nominal mm (inch)                    | Tolerance mm (inch)              | Dimension                                  | Symbol | Nominal mm (inch)                    | Tolerance mm (inch)              |
|--|--------|--------------------------------------|----------------------------------|--|--------|--------------------------------------|----------------------------------|
| Sprocket Hole Diameter                       | Do     | 4.0 (.157)                           | ± 0.2 (.008)                     | Height to Seating Plane (formed leads) (2) | H0     | 7301 7303<br>16.0 (.630) 18.0 (.709) | 7301 7303<br>±0.5 (.020) Minimum |
| Sprocket Hole Pitch                          | P0     | 12.7 (.500)                          | ± 0.3 (.012)                     | Component Alignment                        | Δh     | 4.0 (.157)                           | ±0.2 (.008)                      |
| Component Pitch                              | P      | 12.7 (.500)                          | ± 0.3 (.012)                     | Lead Protrusion                            | L1     | 1.0 (.039)                           | Maximum                          |
| Lead Spacing (1)                             | F      | 5.08 (.20) 2.54 (.10)                | +0.6 -0.2 (+.024 -.008)          | Composite Tape Thickness                   | t      | 0.7 (.051)                           | ±0.2 (.008)                      |
| Sprocket Hole Center to Lead Center (1)      | P1     | 3.81 (.150) 5.08 (.200)              | ± 0.7 (.028)                     | Overall Tape and Lead Thickness            | T      | 1.5 (.059)                           | Maximum                          |
| Sprocket Hole Center to Component Center     | P2     | 6.35 (.250)                          | ± 1.3 (.051)                     | Carrier Tape Width                         | W      | 18.0 (.709)                          | +1.0 - 0.5 (+.039 -.020)         |
| Height to Seating Plane (straight leads) (2) | H      | 7301 7303<br>16.0 (.630) 18.0 (.709) | 7301 7303<br>±0.5 (.020) Minimum | Hold-Down Tape Width                       | W0     | 5.0 (.197)                           | Minimum                          |
| Component Height Above Tape Center           | H1     | 32.2 (1.27)                          | Maximum                          | Hold-Down Tape Location                    | W2     | 3.0 (.118)                           | Maximum                          |

(1) Measured at the egress from the carrier tape, on the component side.  
(2) Determined by a 4 digit suffix placed at the end of the part number, as follows:  
7301 = Recommended for parts with formed leads.  
7303 = Recommended for parts with straight leads.

| <b>CERAMIC PACKAGING</b> |                       |                               |                                   |                           |                               |                  |
|--------------------------|-----------------------|-------------------------------|-----------------------------------|---------------------------|-------------------------------|------------------|
| <b>KEMET Series</b>      | <b>Military Style</b> | <b>Military Specification</b> | <b>Standard (1) Bulk Quantity</b> | <b>Ammo Pack Quantity</b> | <b>Standard Reel Quantity</b> | <b>Reel Size</b> |
| C114C-K-G                | CK12, CC75            | MIL-C-11015/                  | 200/Box                           |                           | 5000                          | 12"              |
| C124C-K-G                | CK13, CC76            | MIL-PRF-20                    | 200/Box                           |                           | 5000                          | 12"              |
| C192C-K-G                | CK14, CC77            |                               | 100/Box                           |                           | 3000                          | 12"              |
| C202C-K                  | CK15                  |                               | 25/Box                            |                           | 500                           | 12"              |
| C222C-K                  | CK16                  |                               | 10/Tray                           |                           | 300                           | 12"              |
| C052C-K-G                | CK05, CC05            |                               | 100/Bag                           | 2000                      | 2000                          | 12"              |
| C062C-K-G                | CK06, CC06            |                               | 100/Bag                           | 1500                      | 1500                          | 12"              |
| C114G                    | CCR75                 | MIL-PRF-20                    | 200/Box                           |                           | 5000                          | 12"              |
| C124G                    | CCR76                 |                               | 200/Box                           |                           | 5000                          | 12"              |
| C192G                    | CCR77                 |                               | 100/Box                           |                           | 3000                          | 12"              |
| C202G                    | CC78-CCR78            |                               | 25/Box                            |                           | 500                           | 12"              |
| C222G                    | CC79-CCR79            |                               | 10/Tray                           |                           | 300                           | 12"              |
| C052/56G                 | CCR05                 |                               | 100/Bag                           |                           | 1700                          | 12"              |
| C062/66G                 | CCR06                 |                               | 100/Bag                           |                           | 1500                          | 12"              |
| C512G                    | CC07-CCR07            |                               | Footnote (2)                      |                           | N/A                           | N/A              |
| C522G                    | CC08-CCR08            |                               | Footnote (2)                      |                           | N/A                           | N/A              |
| C114T                    | CKR11                 | MIL-PRF-39014                 | 200/Box                           |                           | 5000                          | 12"              |
| C124T                    | CKR12                 |                               | 200/Box                           |                           | 5000                          | 12"              |
| C192T                    | CKR14                 |                               | 100/Box                           |                           | 3000                          | 12"              |
| C202T                    | CKR15                 |                               | 25/Box                            |                           | 500                           | 12"              |
| C222T                    | CKR16                 |                               | 10/Tray                           |                           | 300                           | 12"              |
| C052/56T                 | CKR05                 |                               | 100/Bag                           |                           | 1700                          | 12"              |
| C062/66T                 | CKR06                 |                               | 100/Bag                           |                           | 1500                          | 12"              |

NOTE: (1) Standard packaging refers to number of pieces per bag, tray or vial.

(2) Quantity varies. For further details, please consult the factory.