MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3-22
CK-A2201

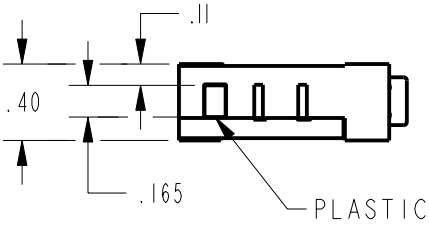

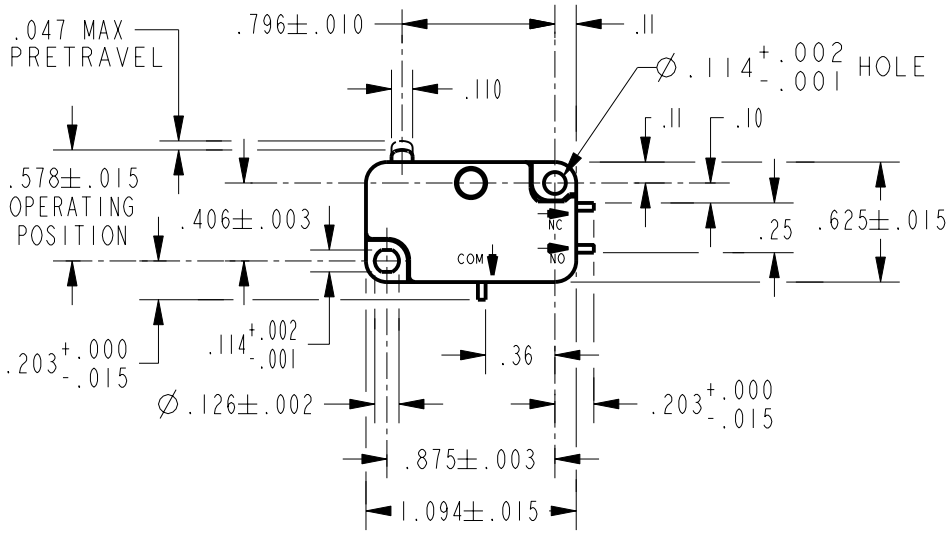

NOTES
1 - **NO HOLES IN TERMINALS**
2 - TERMINALS ARE PLATED
3 - SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 300°F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING FORCE	6-14 OZ
RELEASE FORCE	4 OZ MIN
DIFFERENTIAL TRAVEL	.006-.016
OVERTRAVEL	.040 MIN
FREE POSITION	.625 MAX
RELEASE TRAVEL	.007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L83 15.1A 1/2HP 125, 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .015 LB

REVISIONS
A CO95160 TSM 17JUN99

CATALOG LISTING V3-22 PAGE 1 OF 1
ISSUE 2
REPLACES X99284-V3
RELEASE NO. PR-21675
CHECK
CHECK
CHECK 17JUN99 JAF
CHECK
DRAWN 17JUN99 TSM
PTC/CAD 2D