

Agilent T-1³/₄ (5 mm), T-1 (3 mm), High Intensity, Double Heterojunction AlGaAs Red LED Lamps Data Sheet

HLMP-D101/D105, HLMP-K101/K105

Description

These solid state LED lamps utilize newly developed double heterojunction (DH) AlGaAs/GaAs material technology. This LED material has outstanding light output efficiency over a wide range

of drive currents. The color is deep red at the dominant wavelength of 637 nanometres. These lamps may be DC or pulse driven to achieve desired light output.


Features

- Exceptional brightness
- Wide viewing angle
- Outstanding material efficiency
- Low forward voltage
- CMOS/MOS compatible
- TTL compatible
- Deep red color

Applications

- Bright ambient lighting conditions
- Moving message panels
- Portable equipment
- General use

Package Dimensions

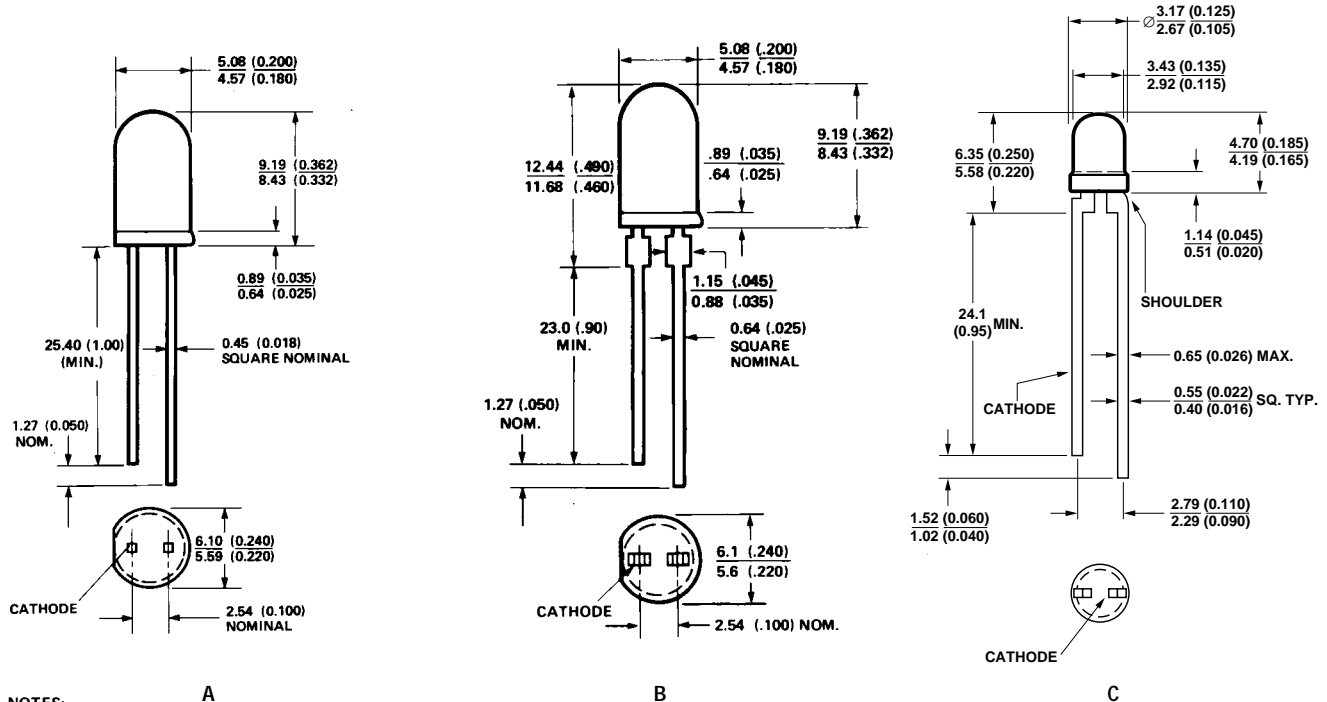

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES (INCHES).
2. AN EPOXY MINUSCUS MAY EXTEND ABOUT 1 mm (0.040") DOWN THE LEADS.

Selection Guide


| Package Description | Device HLMP- | Luminous Intensity Iv (mcd) at 20 mA | | | 2 $\theta_{1/2}$ ^[1] Degree | Package Outline |
|-----------------------------------|--------------|---|-------|-------|---|--------------------|
| | | Min. | Typ. | Max. | | |
| T-1 3/4 Red Tinted Diffused | D101 | 35.2 | 70.0 | – | 65 | A |
| | D101-J00xx | 35.2 | 70.0 | – | 65 | A |
| | D101-JK0xx | 35.2 | 70.0 | 112.8 | 65 | A |
| T-1 3/4 Red Untinted Non-diffused | D105 | 138.0 | 240.0 | – | 24 | B |
| | D105-M00xx | 138.0 | 240.0 | – | 24 | B |
| | D105-N00xx | 200.0 | 290.0 | 580.0 | 24 | B |
| T-1 Red Tinted Diffused | K101 | 22.0 | 45.0 | – | 60 | C |
| | K101-100xx | 22.0 | 45.0 | – | 60 | C |
| | K101-IJ0xx | 22.0 | 45.0 | 70.4 | 60 | C |
| T-1 Red Untinted Non-diffused | K105 | 35.2 | 65.0 | – | 45 | C |
| | K105-J00xx | 35.2 | 65.0 | – | 45 | C |
| | K105-KL0xx | 56.4 | 110.0 | 180.4 | 45 | C |

Note:

1. $\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 the on-axis value.

Part Numbering System

HLMP - x x xx - x x x xx

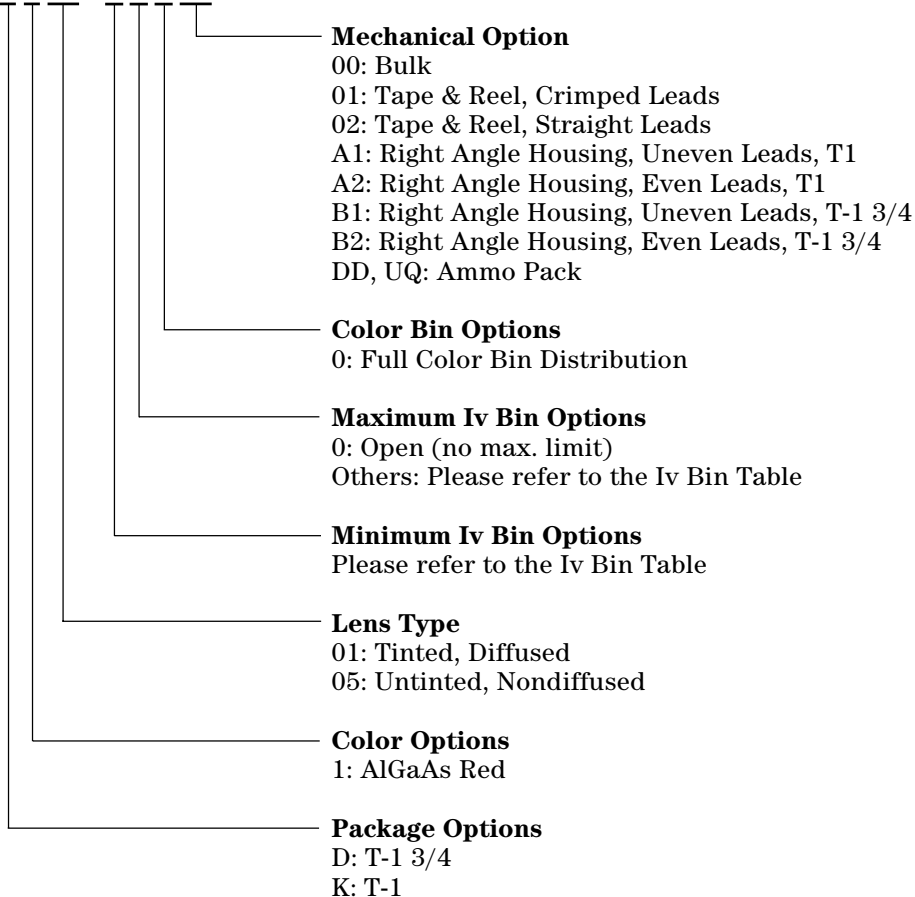

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

| Parameter | Value |
|---|---------------------|
| Peak Forward Current ^[1,2] | 300 mA |
| Average Forward Current ^[2] | 20 mA |
| DC Current ^[3] | 30 mA |
| Power Dissipation | 87 mW |
| Reverse Voltage ($I_R = 100 \mu\text{A}$) | 5 V |
| Transient Forward Current (10 μs Pulse) ^[4] | 500 mA |
| LED Junction Temperature | 110°C |
| Operating Temperature Range | -20 to +100°C |
| Storage Temperature Range | -55 to +100°C |
| Wave Soldering Temperature [1.59 mm (0.063 in.) from body] | 250°C for 3 seconds |
| Lead Solder Dipping Temperature [1.59 mm (0.063 in.) from body] | 260°C for 5 seconds |

Notes:

1. Maximum I_{PEAK} at $f = 1 \text{ kHz}$, $DF = 6.7\%$.
2. Refer to Figure 6 to establish pulsed operating conditions.
3. Derate linearly as shown in Figure 5.
4. The transient peak current is the maximum non-recurring peak current the device can withstand without damaging the LED die and wire bonds. It is not recommended that the device be operated at peak currents beyond the Absolute Maximum Peak Forward Current.

Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

| Symbol | Description | Min. | Typ. | Max. | Unit | Test Condition |
|-----------------------|---------------------------|------|--|------|------|---|
| V_F | Forward Voltage | | 1.8 | 2.2 | V | $I_F = 20 \text{ mA}$ |
| V_R | Reverse Breakdown Voltage | 5.0 | 15.0 | | V | $I_R = 100 \mu\text{A}$ |
| λ_p | Peak Wavelength | | 645 | | nm | Measurement at Peak |
| λ_d | Dominant Wavelength | | 637 | | nm | Note 1 |
| $\Delta\lambda^{1/2}$ | Spectral Line Halfwidth | | 20 | | nm | |
| τ_s | Speed of Response | | 30 | | ns | Exponential Time Constant, e^{-1}/T_s |
| C | Capacitance | | 30 | | pF | $V_F = 0$, $f = 1 \text{ MHz}$ |
| $R\theta_{J-PIN}$ | Thermal Resistance | | 260 ^[3] 210 ^[4] 290 ^[5] | | °C/W | Junction to Cathode Lead |
| η_V | Luminous Efficacy | | 80 | | lm/W | Note 2 |

Notes:

1. The dominant wavelength, λ_d , is derived from the CIE chromaticity diagram and represents the color of the device.
2. The radiant intensity, I_e , in watts per steradian, may be found from the equation $I_e = I_V/\eta_V$, where I_V is the luminous intensity in candelas and η_V is luminous efficacy in lumens/watt.
3. HLMP-D101.
4. HLMP-D105.
5. HLMP-K101/-K105.

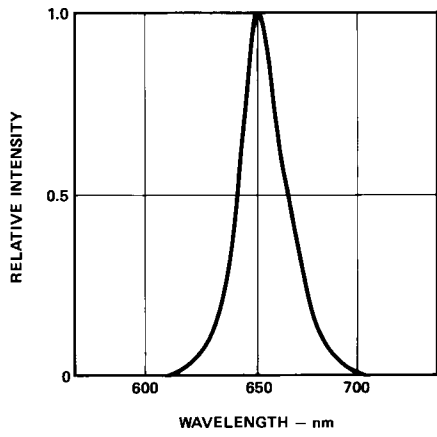


Figure 1. Relative intensity vs. wavelength.

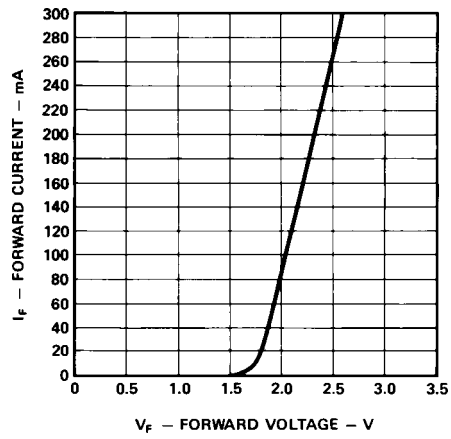


Figure 2. Forward current vs. forward voltage.

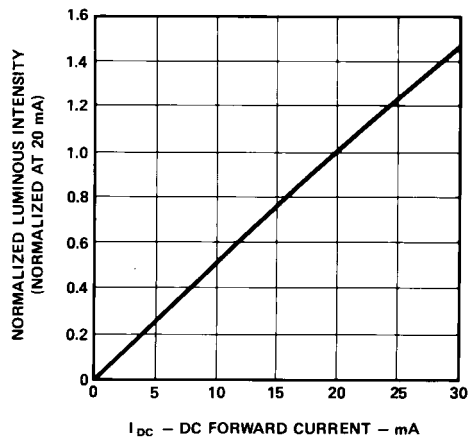


Figure 3. Relative luminous intensity vs. dc forward current.

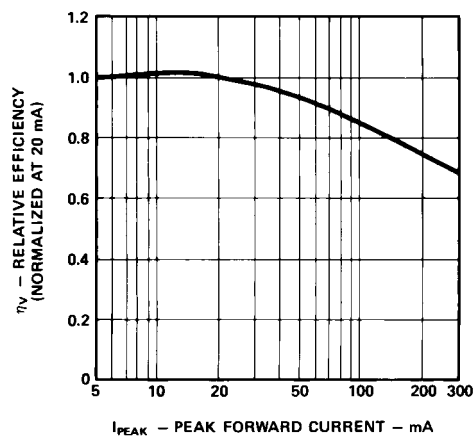


Figure 4. Relative efficiency vs. peak forward current.

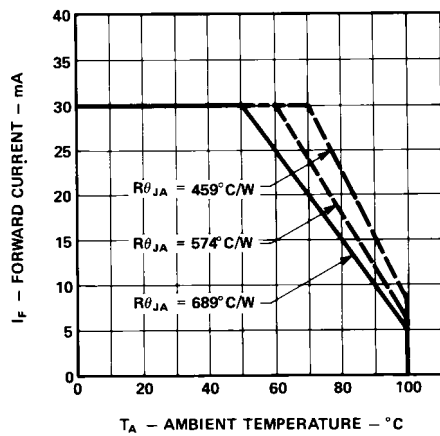


Figure 5. Maximum forward dc current vs. ambient temperature. Derating based on $T_J \text{ MAX.} = 110^\circ\text{C}$.

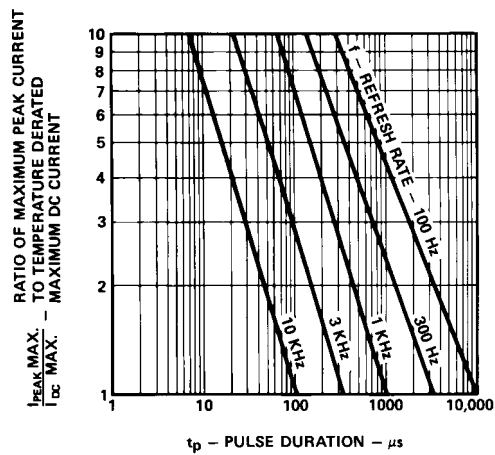


Figure 6. Maximum tolerable peak current vs. peak duration ($I_{\text{PEAK MAX.}}$ determined from temperature derated $I_{\text{DC MAX.}}$).

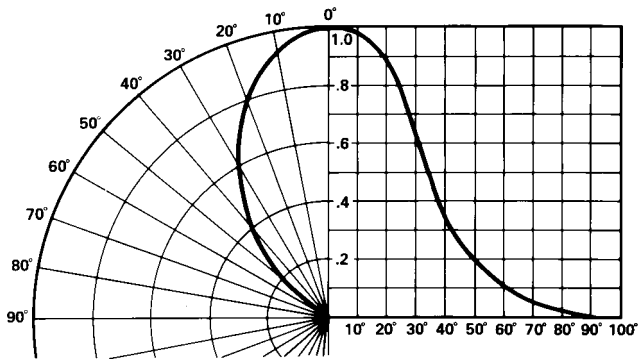


Figure 7. Relative luminous intensity vs. angular displacement.
HLMP-D101.

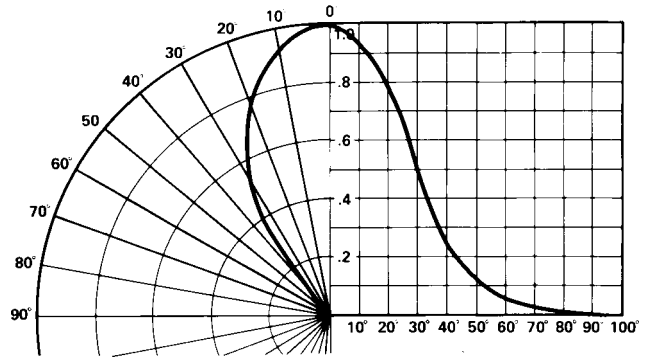


Figure 8. Relative luminous intensity vs. angular displacement.
HLMP-K101.

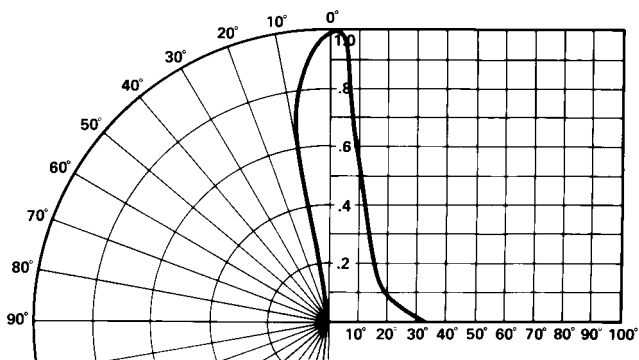


Figure 9. Relative luminous intensity vs. angular displacement.
HLMP-D105.

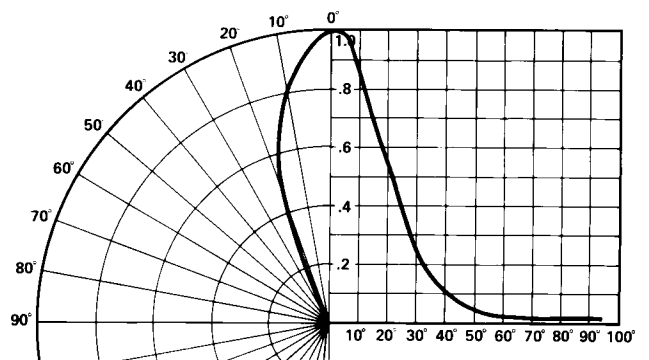


Figure 10. Relative luminous intensity vs. angular displacement.
HLMP-K105.

Intensity Bin Limits

| Color | Bin | Intensity Range (mcd) | |
|-------|---------|-----------------------|---------|
| | | Min. | Max. |
| Red | I | 24.8 | 39.6 |
| | J | 39.6 | 63.4 |
| | K | 63.4 | 101.5 |
| | L | 101.5 | 162.4 |
| | M | 162.4 | 234.6 |
| | N | 234.6 | 340.0 |
| | O | 340.0 | 540.0 |
| | P | 540.0 | 850.0 |
| | Q | 850.0 | 1200.0 |
| | R | 1200.0 | 1700.0 |
| | S | 1700.0 | 2400.0 |
| | T | 2400.0 | 3400.0 |
| | U | 3400.0 | 4900.0 |
| | V | 4900.0 | 7100.0 |
| | W | 7100.0 | 10200.0 |
| | X | 10200.0 | 14800.0 |
| Y | 14800.0 | 21400.0 | |
| Z | 21400.0 | 30900.0 | |

Maximum tolerance for each bin limit is $\pm 18\%$.

Mechanical Option Matrix

| Mechanical Option Code | Definition |
|------------------------|--|
| 00 | Bulk Packaging, minimum increment 500 pcs/bag |
| 01 | Tape & Reel, crimped leads, minimum increment 1300 pcs (T-1 3/4)/1800 pcs (T-1) |
| 02 | Tape & Reel, straight leads, minimum increment 1300 pcs (T-1 3/4)/1800 pcs (T-1) |
| A1 | Right Angle Housing, uneven leads, minimum increment 500 pcs/bag |
| A2 | Right Angle Housing, even leads, minimum increment 500 pcs/bag |
| B1 | Right Angle Housing, uneven leads, minimum increment 500 pcs/bag |
| B2 | Right Angle Housing, even leads, minimum increment 500 pcs/bag |
| DD | Ammo Pack, straight leads in 2K increment |
| UQ | Ammo Pack, horizontal leads in 2K increment |

Note:

All categories are established for classification of products. Products may not be available in all categories. Please contact your local Agilent representative for further clarification/information.

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or (916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152 (Domestic/International), or 0120-61-1280 (Domestic Only)

Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2004 Agilent Technologies, Inc.

Obsoletes 5968-1440E

November 12, 2004

5988-2230EN



Agilent Technologies