



Micro Commercial Components

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

**MLV1005 Series**  
**MLV1608 Series**  
**MLV2012 Series**  
**MLV3216 Series**  
**MLV3225 Series**


## Features

- Monolithic Multilayer Construction with 1005, 1608, 2012, 3216 and 3225 Model Sizes
- Wide Operating Voltage Range  $V_{DC}=3.3V$  to 48V
- Excellent Nonlinear Voltage-Current Characteristics with Low Clamping Voltage and Large Surge Current/Energy Handling Capabilities at Small Size
- Available in Tape and Reel or Bulk Pack

## Maximum Ratings

- Operating Ambient Temperature Range:  $-55^{\circ}C$  to  $+125^{\circ}C$
- Leakage Current: 1.  $< 50 \mu A$  at ambient temp.  
 2.  $< 100 \mu A$  for 3.3V<sub>DC</sub>  
 (Test Conditions: The current measured with  $V_{DC}$  applied)
- Maximum Surge Energy (WS):  $\Delta V_{1mA} / V_{1mA} \cong \pm 10\%$   
 Test Conditions: On standard circumstance Impulse the 10/1000  $\mu s$  specified current wave 1 time ,  
 Measure the variation of  $V_{1mA}$
- Maximum Surge Current ( $I_S$ ):  $\Delta V_{1mA} / V_{1mA} \cong \pm 10\%$   
 Test Conditions: 1 At room temperature and humidity  
 2. 8/20  $\mu s$  waveform  
 3. Impulse of +/- polarity  
 4. Measure the variation of  $V_{1mA}$

## Normal Type Multilayer Varistor

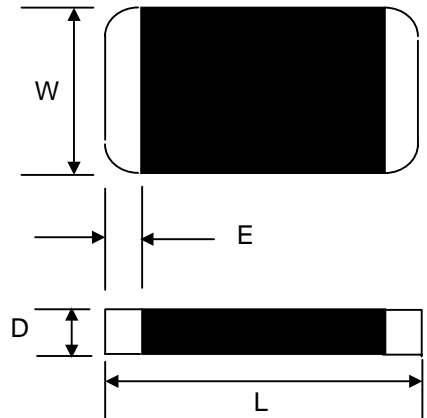

Size	DIM	INCHES		MM	
		MIN	MAX	MIN	MAX
1005 (0402)	L	0.036	0.044	0.90	1.00
	W	0.016	0.024	0.40	0.60
	D	---	0.024	---	0.60
	E	0.004	0.016	0.10	0.40
1608 (0603)	L	0.057	0.069	1.50	1.80
	W	0.026	0.038	0.65	0.95
	D	---	0.350	---	0.90
	E	0.007	0.023	0.20	0.60
2012 (0805)	L	0.071	0.087	1.80	2.20
	W	0.041	0.057	1.05	1.45
	D	---	0.510	---	1.30
	E	0.007	0.023	0.20	0.60
3216 (1206)	L	0.116	0.136	2.95	3.45
	W	0.036	0.044	1.40	1.80
	D	---	0.067	---	1.70
	E	0.010	0.030	0.25	0.75
3225 (1210)	L	0.116	0.136	2.95	3.45
	W	0.088	0.108	2.25	2.75
	D	---	0.067	---	1.70
	E	0.010	0.030	0.25	0.75

**Electrical Characteristics**

Part Number	Working Voltage		Breakdown Voltage	Maximum Transient			Typical Capacitance
	V <sub>RMS</sub>	V <sub>DC</sub>		Clamping Voltage <sup>1</sup>	Surge Current	Surge Energy	
Symbol	V <sub>RMS</sub>	V <sub>DC</sub>	V <sub>B</sub>	V <sub>C</sub>	I <sub>S</sub>	W <sub>S</sub>	C
Units	Volts(max.)	Volts(max.)	Volts	Volts(max.)	Amps(max.)	Joules(max)	PF(typ.)
Test Condition			1mA DC	8/20 μ s (1A)	8/20 μ s	10/1000 μ s	0.5V <sub>rms</sub>
							1KHz
MLV1005N030	2.5	3.3	5(4.4-6.0)	10	20	0.05	390
MLV1005N050	4	5.5	8(6.4-9.6)	16	20	0.05	295
MLV1005N090	6	9	12(9.6-14.4)	20	20	0.05	190
MLV1005N110	8	11	15(12.75-17.25)	25	20	0.05	160
MLV1005N140	11	14	18(16.5-20.3)	30	20	0.05	135
MLV1005N160	12	16.5	22(19.8-24.2)	36	20	0.05	105
MLV1005N180	14	18	24(21.6-27)	40	20	0.05	93
MLV1005N220	17	22	27(24.3-29.8)	45	20	0.05	75
MLV1005N260	20	26	33(29.7-36.3)	54	20	0.05	54
MLV1005N300	25	30	39(35.1-42.9)	65	20	0.05	45
MLV1005N380	30	38	47(42.3-51.7)	77	20	0.05	27
MLV1608N030	2.5	3.3	5(4.4-6.0)	10	30	0.1	1250
MLV1608N050	4	5.5	8(6.4-9.6)	16	30	0.1	800
MLV1608N090	6	9	12(9.6-14.4)	20	30	0.1	680
MLV1608N110	8	11	15(12.75-17.25)	25	30	0.1	460
MLV1608N140	11	14	18(16.5-20.3)	30	30	0.1	350
MLV1608N160	12	16.5	22(19.8-24.2)	36	30	0.1	300
MLV1608N180	14	18	24(21.6-27)	39	30	0.1	270
MLV1608N220	17	22	27(24.3-29.8)	44	30	0.1	235
MLV1608N260	20	26	33(29.7-36.3)	54	30	0.1	200
MLV1608N300	25	30	39(35.1-42.9)	65	30	0.1	120
MLV1608N380	30	38	47(42.3-51.7)	77	30	0.1	100
MLV1608N450	35	45	56(50.4-61.6)	90	30	0.1	80

**Electrical Characteristics**

Part Number	Working Voltage		Breakdown Voltage	Maximum Transient			Typical Capacitance
				Clamping Voltage <sup>†</sup>	Surge Current	Surge Energy	
Symbol	V <sub>RMS</sub>	V <sub>DC</sub>	V <sub>B</sub>	V <sub>C</sub>	I <sub>S</sub>	W <sub>S</sub>	C
Units	Volts(max.)	Volts(max.)	Volts	Volts(max.)	Amps(max.)	Joules(max)	PF(typ.)
Test Condition			1mA DC	8/20 μ s (1A)	8/20 μ s	10/1000 μ s	0.5V <sub>rms</sub> 1KHz
MLV2012N030	2.5	3.3	5(4.4-6.0)	10	40	0.1	2450
MLV2012N050	4	5.5	8(6.4-9.6)	16	80	0.1	1600
MLV2012N090	6	9	12(9.6-14.4)	20	80	0.1	1180
MLV2012N110	8	11	15(12.75-17.25)	25	100	0.1	1050
MLV2012N140	11	14	18(16.5-20.3)	30	100	0.1	750
MLV2012N160	12	16.5	22(19.8-24.2)	36	100	0.2	680
MLV2012N180	14	18	24(21.6-27)	39	100	0.2	550
MLV2012N220	17	22	27(24.3-29.8)	44	100	0.3	400
MLV2012N260	20	26	33(29.7-36.3)	54	100	0.3	350
MLV2012N300	25	30	39(35.1-42.9)	65	100	0.3	310
MLV2012N380	30	38	47(42.3-51.7)	77	100	0.3	280
MLV2012N450	35	45	56(50.4-61.6)	90	80	0.3	195
MLV2012N560	40	56	68(61.2-74.8)	110	80	0.3	145
MLV2012N650	50	65	82(73.8-90.2)	135	60	0.3	85
MLV3216N030	2.5	3.3	5(4.4-6.0)	10	60	0.1	3850
MLV3216N050	4	5.5	8(6.4-9.6)	16	100	0.2	3200
MLV3216N090	6	9	12(9.6-14.4)	20	100	0.2	2200
MLV3216N110	8	11	15(12.75-17.25)	25	100	0.2	1300
MLV3216N140	11	14	18(16.5-20.3)	30	100	0.3	1150
MLV3216N160	12	16.5	22(19.8-24.2)	36	100	0.3	1000
MLV3216N180	14	18	24(21.6-27)	38	100	0.3	900
MLV3216N220	17	22	27(24.3-29.8)	44	100	0.4	840
MLV3216N260	20	26	33(29.7-36.3)	54	100	0.5	490
MLV3216N300	25	30	39(35.1-42.9)	65	100	0.6	440
MLV3216N380	30	38	47(42.3-51.7)	77	100	0.7	400
MLV3216N450	35	45	56(50.4-61.6)	90	100	0.8	310
MLV3216N560	40	56	68(61.2-74.8)	110	100	1.0	280
MLV3216N650	50	65	82(73.8-90.2)	135	100	0.5	240
MLV3216N850	60	85	100(90-110)	165	100	0.6	160
MLV3216N900	70	90	110(99-121)	180	100	0.6	120

**Electrical Characteristics**

Part Number	Working Voltage		Breakdown Voltage	Maximum Transient			Typical Capacitance
				Clamping Voltage <sup>†</sup>	Surge Current	Surge Energy	
Symbol	V <sub>RMS</sub>	V <sub>DC</sub>	V <sub>B</sub>	V <sub>C</sub>	I <sub>S</sub>	W <sub>S</sub>	C
Units	Volts(max.)	Volts(max.)	Volts	Volts(max.)	Amps(max.)	Joules(max)	PF(typ.)
Test Condition			1mA DC	8/20 μ s (1A)	8/20 μ s	10/1000 μ s	0.5V <sub>rms</sub> 1KHz
MLV3225N050	4	5.5	8(6.4-9.6)	16	250	0.4	6200
MLV3225N090	6	9	12(9.6-14.4)	20	250	0.5	4400
MLV3225N110	8	11	15(12.75-17.25)	25	250	0.6	3520
MLV3225N140	11	14	18(16.5-20.3)	30	250	0.7	3260
MLV3225N160	12	16.5	22(19.8-24.2)	36	250	0.8	2100
MLV3225N180	14	18	24(21.6-27)	38	250	0.8	1950
MLV3225N220	17	22	27(24.3-29.8)	44	250	1.0	1720
MLV3225N260	20	26	33(29.7-36.3)	54	250	1.2	1090
MLV3225N300	25	30	39(35.1-42.9)	65	250	1.4	920
MLV3225N380	30	38	47(42.3-51.7)	77	250	1.6	780
MLV3225N450	35	45	56(50.4-61.6)	90	250	2.0	470
MLV3225N560	40	56	68(61.2-74.8)	110	250	2.3	390
MLV3225N650	50	65	82(73.8-90.2)	135	250	1.2	320
MLV3225N850	60	85	100(90-110)	165	200	1.4	220
MLV3225N900	70	90	110(99-121)	180	200	1.4	200

<sup>†</sup> MLV3225 maximum clamping voltage testing current 2.5A



TM

Micro Commercial Components

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.