

**Tyco/Electronics**  
**Raychem Circuit Protection**  
 308 Constitution Drive  
 Menlo Park, CA 94025-1164  
 Phone: 800-227-4856  
 Fax: 800-227-4866

**PolySwitch®**  
**PTC Devices**  
 Overcurrent Protection Device

**PRODUCT: RXE025**

DOCUMENT: SCD 21860  
 PCN: 310635  
 REV LETTER: H  
 REV DATE: AUGUST 20, 2001  
 PAGE NO.: 1 OF 1

**Specification Status: RELEASED**

**Electrical Rating**


**Voltage: 72V MAX**  
**Current: 40A MAX**

Insulating Material:  
 Cured, Flame Retarded Epoxy Polymer  
 meets UL94 V-0 Requirements

Lead Material:  
 24 AWG Tin Lead Plated Copper Clad Steel

**Marking:**

- Raychem Logo and Voltage
- ⊗ 72 — Part Identification
- X 025 — Part Identification
- □ □ □ — Lot Identification (can be on back)

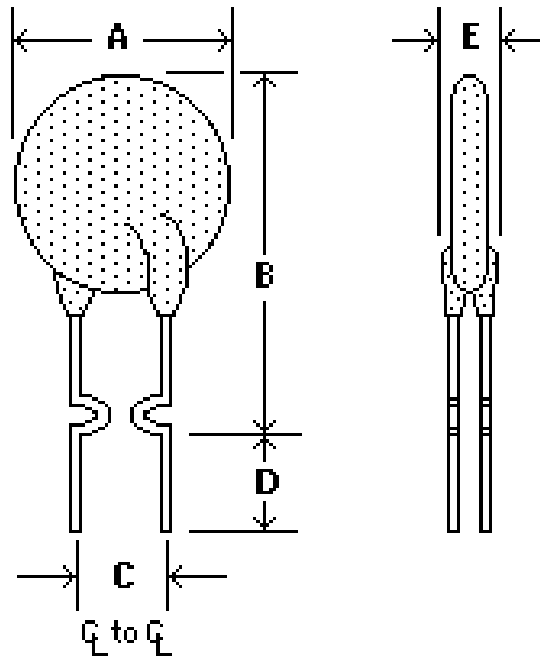

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.4	--	12.7	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.29)	--	(0.50)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I <sub>H</sub> RATED CURRENT	CURRENT RATINGS						TIME TO TRIP	INITIAL RESISTANCE VALUES		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES AT 0°C		AMPERES AT 20°C		AMPERES AT 60°C			OHMS AT 20°C			
AMPERES 20°C HOLD	AMPERES AT 0°C HOLD	AMPERES AT 0°C TRIP	AMPERES AT 20°C HOLD	AMPERES AT 20°C TRIP	AMPERES AT 60°C HOLD	AMPERES AT 60°C TRIP	SECONDS AT 20°C, 1.25A MAX	OHMS MIN	OHMS MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
.25	.30	.60	.25	.50	.16	.32	2.5	1.25	1.95	3.00	.45

**Recognitions:**

UL, CSA and TUV approved.

**Reference Documents:**

Approved by UL as a current limiting impedance, per the 1996 NEC, Tables 11 (c) and 11 (b).  
 PS300

**Precedence:**

This specification takes precedence over documents referenced herein.

**Effectivity:**

Reference documents shall be the issue in effect on the date of invitation for bid.

**CAUTION:**

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.