

# NTC Thermistors

## SMD Thermistors



TSM Series

MERITEK

UL E223037

### Features


1. EIA size 0402, 0603, 0805, 1206
2. Highly reliable monolithic structure
3. Wide resistance range
4. Cost effective
5. Agency recognition: UL



### PART NUMBERING SYSTEM

	TSM	2	A	104	H	39	H	2	R
<b>Meritek Series</b>									
<b>Size</b>									
CODE	1	2							
	0603	0805							
<b>Beta Value</b>									
CODE	A	B							
	B <sub>25/85</sub>	B <sub>25/50</sub>							
<b>Part No. (R25)</b>									
CODE	102	103							
	1K	10K							
<b>Tolerance of Resistor</b>									
CODE	F	G	H	J	K				
(%)	±1	±2	±3	±5	±10				
<b>Beta Value—first 2 digits</b>									
CODE	30	31	...	39	40	41	...		
	30	31	...	39	40	41	...		
<b>Beta Value—last 2 digits</b>									
CODE	0	A	1	2	D	...	5	F	...
	00	05	10	...	20	35	...	50	55
									H
									75
									75
<b>Tolerance of Beta Value</b>									
CODE	1	2	3	...					
(%)	±1	±2	±3	...					
<b>Standard Packaging</b>									
CODE	R	B							
	Reel	Bulk							

### Dimensions

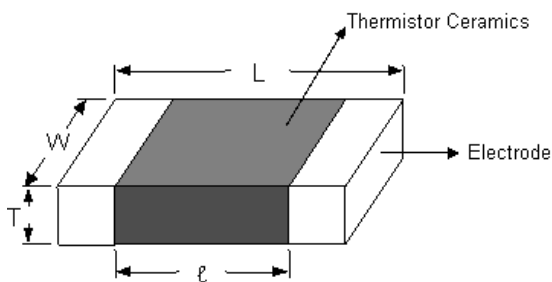

Part no.	Size	L nor.	W nor.	T max.	ℓ min.
TSM0	0402	1.00±0.15	0.50±0.10	0.60	0.2
TSM1	0603	1.60±0.15	0.80±0.15	0.95	0.3
TSM2	0805	2.00±0.20	1.25±0.20	1.20	0.4
TSM3	1206	3.20±0.30	1.60±0.20	1.50	0.5

# NTC Thermistors

## SMD Thermistors



TSM Series

MERITEK

### Electrical Characteristics

Part No.	Zero Power Resistance at 25°C	Tolerance of R <sub>25</sub>	B Value		Tolerance of B value	Max. Power Rating at 25°C	Dissipation Factor	Thermal Time Constant	Operating Temperature Range	Safety Approvals		
	R <sub>25</sub> (KΩ)	(±%)	(K)		(±%)	P <sub>max</sub> (mW)	δ(mW/°C)	τ(Sec.)	T <sub>L</sub> ~T <sub>U</sub> (°C)	UL		
TSM0A103^34D*	10	1、2、3 5、10	25/85	3435	1、2、3	170	Approx. 1.7	Approx. 2	-40 ~ +125			
TSM0A103^391*	10			3910								
TSM0A223^393*	22			3930								
TSM0A333^393*	33			3930								
TSM0A473^393*	47			3930								
TSM0A503^395*	50			3950								
TSM0A683^405*	68			4050								
TSM0A104^39H*	100			3975								
TSM0A224^405*	220			4050								
TSM0A474^409*	470			4090								
TSM0B474^470*	470	5、10	25/50	4700	2、3							
TSM1A202^340*	2	1、2、3、 5、10	25/85	3400	1、2、3	210	Approx 2.1	Approx 3.1	-40~+125			
TSM1A222^34D*	2.2	5、10	25/85	3435								
TSM1B222^395*	2.2	5、10	25/50	3950								
TSM1A472^34D*	4.7	1、2、3、 5、10	25/85	3435								
TSM1A472^367*	4.7			3670								
TSM1A502^34D*	5			3435								
TSM1A682^34D*	6.8	5、10	25/85	3435								
TSM1A682^430*	6.8			4300								
TSM1A103^34D*	10	1、2、3、 5、10	25/85	3435								
TSM1A103^39H*	10			3975								
TSM1B103^425*	10			25/50						4250		
TSM1A123^380*	12			25/85						25/85	3800	
TSM1A153^395*	15										3950	
TSM1A223^39H*	22										3975	
TSM1A333^39H*	33										3975	
TSM1A473^39H*	47										3975	
TSM1A503^39H*	50										3975	
TSM1A683^39H*	68										3975	
TSM1A104^405*	100	4050										
TSM1B104^425*	100	25/50	4250									
TSM1A104^436*	100	25/85	25/85	4360								
TSM1A154^406*	150			4060								
TSM1A204^410*	200			4100								
TSM1A224^410*	220			4100								
TSM1A334^415*	330			4150								
TSM1A474^410*	470			4100								
TSM1B474^446*	470			25/50						4460		

Note 1: ^ = Tolerance of R<sub>25</sub>

Note 2: \* = Tolerance of B value

\*Special specification are available upon request

# NTC Thermistors

## SMD Thermistors



TSM Series

MERITEK

### Electrical Characteristics

Part No.	Zero Power Resistance at 25°C	Tolerance of R <sub>25</sub>	B Value	Tolerance of B value	Max. Power Rating at 25°C	Dissipation Factor	Thermal Time Constant	Operating Temperature Range	Safety Approvals		
	R <sub>25</sub> (KΩ)	(±%)	(K)	(±%)	P <sub>max</sub> (mW)	δ(mW/°C)	τ(Sec.)	T <sub>L</sub> ~T <sub>U</sub> (°C)	UL		
TSM2A102^320*	1	1、2、3、5、10	25/85	3200	1、2、3	240	Approx 3.2	Approx 5.4	-40~+125	√	
TSM2A472^34D*	4.7			3435							
TSM2A502^34D*	5			3435							
TSM2A682^34D*	6.8			3435							
TSM2A103^34D*	10			3435							
TSM2A103^380*	10			3800							√
TSM2A103^39H*	10			3975							√
TSM2A153^395*	15			3950							
TSM2A203^395*	20			3950							
TSM2A223^380*	22			3800							
TSM2A223^39H*	22			3975							
TSM2A303^39H*	30			3975							
TSM2A473^39H*	47			3975							√
TSM2A503^39H*	50			3975							√
TSM2A683^39H*	68			3975							
TSM2A104^405*	100	4050		√							
TSM2A204^410*	200	4100	1、2、3	240	Approx 3.2	Approx 5.4	-40~+125	√			
TSM2A224^410*	220	4100						√			
TSM3A472^34D*	4.7	1、2、3、5、10	25/85	3435	1、2、3	320	Approx 3.2	Approx 6.7	-40~+125		
TSM3A502^34D*	5			3435							
TSM3A103^34D*	10			3435							
TSM3A103^39H*	10			3975							
TSM3A223^39H*	22			3975							
TSM3A473^39H*	47			3975							
TSM3A503^39H*	50			3975							
TSM3A683^39H*	68			3975							
TSM3A104^405*	100			4050							
TSM3A204^410*	200			4100							
TSM3A224^410*	220			4100							
TSM3A474^425*	470			4250							

Note 1: ^ = Tolerance of R<sub>25</sub>

Note 2: \* = Tolerance of B value

\*Special specification are available upon request