


## HCMOS 7 x 5 x 2.5mm SMD, MHz Range

- Miniature 7 x 5 x 2.5mm SMD package
- Wide frequency range: 1.25MHz to 156.0MHz
- Supply voltage 2.8, 3.0, 3.3 or 5.0 Volts
- Frequency stability from  $\pm 1$ ppm over  $-30$  to  $+75^\circ\text{C}$
- RoHS compliant




### DESCRIPTION

EM57T series TCXOs are packaged in a miniature 4 pad ceramic SMD package. With squarewave (CMOS) output, tolerances are available from  $\pm 1.0$ ppm over  $-30^\circ$  to  $+75^\circ\text{C}$ . The part has a  $0.01\mu\text{F}$  decoupling capacitor built in.

### SPECIFICATION

Product Series Code	TCXO: EM57T VCTCXO: VEM57T
Frequency Range:	1.25MHz to 156.0MHz
Output Waveform:	Squarewave, HCMOS
Initial Calibration Tolerance:	$< \pm 2.0$ ppm at $+25^\circ \pm 2^\circ\text{C}$
Standard Frequencies:	10.0, 12.8, 13.0, 14.4, 15.36, 16.384, 19.2, 19.440, 19.68, 25.0, 20.0, 27.0, 38.880, 40.0, 77.760, 125.0, 155.520 (Partial list)
Operating Temperature Range:	See table
Frequency Stability	
vs. Ageing:	$\pm 1.0$ ppm max. first year
vs. Voltage Change:	$\pm 0.3$ ppm max. $\pm 5\%$ change
vs. Load Change:	$\pm 0.3$ ppm max. $\pm 10\%$ change
vs. Reflow (SMD type):	$\pm 1.0$ ppm max. for one reflow (Measured after 24 hours)
Supply Voltage:	+2.8, +3.0, +3.3 or +5.0V (See table)
Output Logic Levels:	Logic High: 90% Vdd min. Logic Low: 10% Vdd max.
Rise and Fall Times:	10ns max.
Duty Cycle:	50% $\pm 10\%$ standard, 50% $\pm 5\%$ option
Start-up Time:	5ms typical, 10ms max.
Current Consumption:	See table below
Output Load:	15pF
Storage Temperature:	$-55 \sim +125^\circ\text{C}$

### EM57T - OUTLINES AND DIMENSIONS

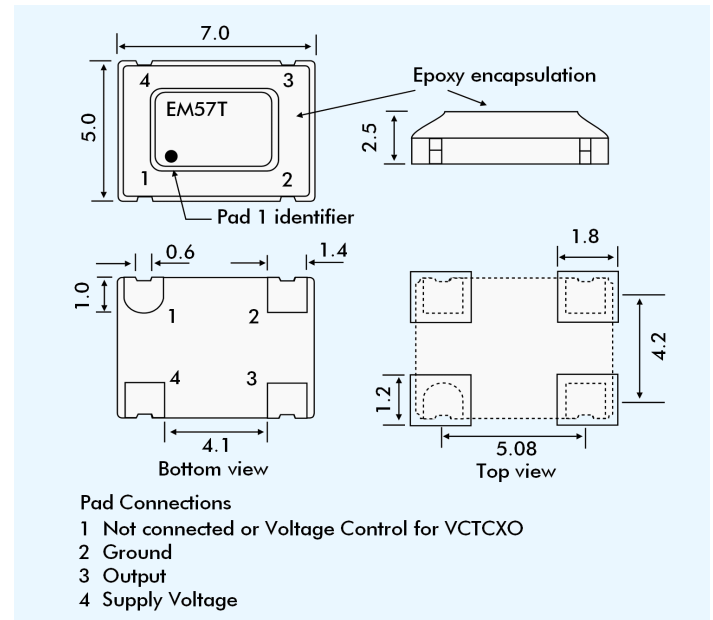

### VEM57T VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Standard = $+1.5 \pm 1.0$ Volts for all input voltages. (Contact technical sales if $+2.5 \pm 2.0$ Volts is required.)
Frequency Deviation:	$\pm 6.0$ ppm min. ( $V_{con} = +4.5V \pm 1.0V$ )
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Input Impedance:	50k $\Omega$ minimum
Modulation Bandwidth:	20kHz minimum
Linearity:	$\pm 10\%$ maximum

### FREQUENCY STABILITY

Frequency Stability (ppm)		$\pm 0.5$	$\pm 1.0$	$\pm 1.5$	$\pm 2.0$	$\pm 2.5$
Temperature Range ( $^\circ\text{C}$ )	0 ~ +50	ASK	✓	✓	✓	✓
	-10 ~ +60	x	✓	✓	✓	✓
	-20 ~ +70	x	x	✓	✓	✓
	-30 ~ +75	x	x	x	✓	✓
	-40 ~ +85	x	x	x	x	✓

✓ = available, x = not available, ASK = call Technical Sales

### INPUT VOLTAGE & CURRENT CONSUMPTION

Input Voltage/ Frequency	+2.8V	+3.0	+3.3V	+5.0 V
8.192MHz	2mA	2mA	2mA	5mA
10.0MHz	3mA	4mA	4mA	7mA
77.760MHz	14mA	17mA	17mA	32mA
155.520MHz	26mA	35mA	35mA	50mA

### SSB PHASE NOISE at $25^\circ\text{C}$

Offset		10Hz	100Hz	1kHz	10kHz	100kHz
Part = M57T33	at 10.0Mhz (dBc/Hz)	-115	-135	-148	-152	-155
	at 155.250Mhz (dBc/Hz)	-72	-110	-125	-132	-125

### PART NUMBERING PROCEDURE

Example: **EM57T33-38.880-2.5/-30+75**

Series Description: TCXO = EM57T, VCTCXO = VEM57T

Supply Voltage: 28 = 2.8VDC, 3 = 3.0VDC, 33 = 3.3 VDC, 5 = 5.0 VDC

Frequency (MHz): 38.880

Stability over OTR ( $\pm$ ppm): 2.5

Operating Temperature Range (OTR) ( $^\circ\text{C}$ ): -30 to +75

Lower and upper limits.