


Crystal Oscillators (XO's)

XO-400

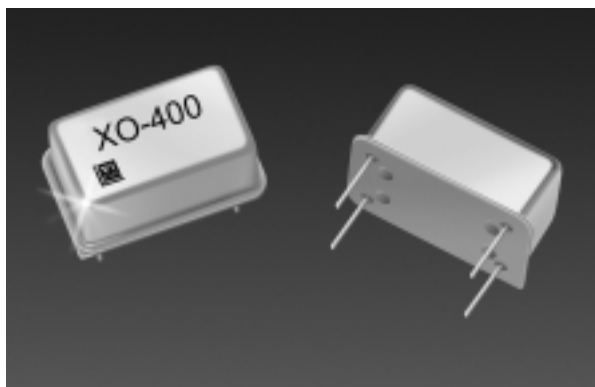

Description:

Vectron International has introduced a series of low cost complementary PECL Crystal Oscillators (XO's) available in frequencies from 15 MHz to 250 MHz in a standard 4 pin DIP package. This series offers ultra low jitter of <0.5 ps rms from 12 kHz to 20 MHz bandwidth.

Features:

- Ultra low jitter
- 3.3 Vdc or 5 Vdc operation
- Complementary PECL output
- Standard 4 pin DIP package

Performance Characteristics

Parameter	Characteristics
Frequencies:	15 MHz to 250 MHz
Package Size:	20.32 x 12.70 x 10.29 mm (0.8" x 0.5" x 0.405")
Supply Voltage:	C = 5 Vdc \pm 5% D = 3.3 Vdc \pm 5%
Supply Current:	<80 mA
Output Type:	Complementary PECL
Output Level: @ +25°C	V_{OH} ("1") = $V_{CC} - 1.02V$ min. V_{OL} ("0") = $V_{CC} - 1.63V$ max
Rise/Fall Time t_r/t_f :	<1.5 ns (20% to 80%)
Symmetry (Duty Cycle):	50/50 \pm 5% @ $V_{CC} - 1.3V$ for "D"; $V_{CC} - 3V$ for "C"
Internal Load:	274 ohm internal load for each output for 3.3 Vdc, 510 ohms for 5Vdc
Temperature Stability:	C-C = \pm 20 ppm All Causes over 0°C to +70°C C-F = \pm 32 ppm All Causes over 0°C to +70°C C-G = \pm 50 ppm All Causes over 0°C to +70°C F-G = \pm 50 ppm All Causes over -40°C to +85°C All Causes = Entire Temperature Range, Aging for 10 years Initial Accuracy and Supply variation.
Jitter:	<0.5 ps rms from 12 kHz to 20 MHz BW @ 155.52 MHz

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com