



**NOTES:**

- 1 4 DIGIT DATE CODE, AND CATALOG No. LOCATED APPROXIMATELY AS SHOWN.
- 2 STEP 5 DOES NOT APPLY TO 84 & 88 SERIES. OMIT STEP 5 ON CATALOG No..
- 3 STEP 6  $\bullet$  = 2 DOES NOT APPLY TO 166 SERIES.
- 4 SERIES:  
84 SERIES FOR SMALL C PRESS® WITH  $\phi 0.032 \pm .003 / 0.81 \pm 0.08$  P.T.H  
88 SERIES FOR STANDARD C PRESS® WITH  $\phi 0.040 \pm .003 / 1.02 \pm 0.08$  P.T.H  
166 SERIES FOR SOLDER TAIL WITH  $\phi 0.040 \pm .003 / 1.02 \pm 0.08$  P.T.H
- 5 166 SERIES TAILS ARE .1010/0.254 X .017/0.432 IN LENGTHS OF .125/3.17 AND .170/4.32.
- 6 INSULATOR AVAILABLE IN BLACK WHEN UTILIZING 166 SERIES DEVIATION 4338.
- 7 AVAILABLE FOR 84 SERIES RECEPTACLE ONLY.
- 8 CUSTOMER TOOLING:

TOOLS		
84R SERIES TOOLING		
DESCRIPTION	CATALOG No.	
INSERTION TOOL	14 POSITION	107-43604-01
	24 POSITION	107-43604-02
	36 POSITION	107-43604-03
	50 POSITION	107-43604-04
CONTACT REMOVAL TOOL	N/A	107-43929
SINGLE CONTACT KNOCK-OUT	N/A	107-42456
INSULATOR REMOVAL	14 & 24 POSITION	107-25875
	36 & 50 POSITION	107-25876

- 9 ADD DEVIATION No. 5422 TO CATALOG No. IF YOU WANT TO HAVE DUST COVERS BULK PACKAGED.
- 10 FOR PLATED THRU HOLE SPECIFICATION SEE DRAWING 27331 FOR  $\phi 0.040 / 1.02$  P.T.H. & DRAWING 27367 FOR  $\phi 0.032 / 0.81$  P.T.H.

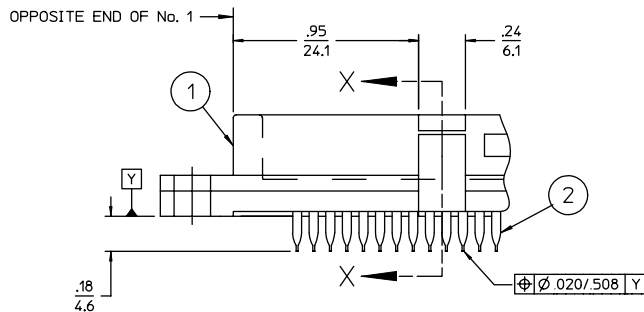

PARTIAL SECTION X-X  
RECEPTACLE WITH VIBRATION LOCKS SHOWN 7 8

**ORDERING CHART**

SPECIFY COMPLETE CONNECTOR BY FOLLOWING INDICATED STEPS

4 STEP 1 CODE

84 SERIES
88 SERIES
166 SERIES

STEP 2 GRID

INSULATORS FOR .085/2.16 X .160/4.06 GRID ARE BLACK IN COLOR

CODE	DESCRIPTION
11	.085/2.16 X .151/3.83 (PLUG) .085/2.16 X .169/4.29 (RECEPTACLE)
12	.085/2.16 X .160/4.06 (P & R)

STEP 3 No. OF CONTACT PAIRS

14	24
36	50

STEP 4 INSULATOR

CODE	DESCRIPTION
P	PLUG
R	RECEPTACLE
V	RECEPTACLE WITH VIBRATION LOCKS 7

STEP 7 CONTACT PLATING

PLATING CODE	DESCRIPTION	DESCRIPTION
D	30 MICROINCHES GOLD OVER 50 MICROINCHES NICKEL ON CONTACT AREA WITH BRIGHT TIN ON THE C-SECTION	NON- RoHS
C	30 MICROINCHES GOLD OVER 50 MICROINCHES NICKEL ON CONTACT AREA WITH GOLD FLASH ON THE C-SECTION	RoHS
H	30 MICROINCHES GOLD OVER 50 MICROINCHES NICKEL ON CONTACT AREA WITH PURE TIN ON THE C-SECTION	RoHS

STEP 6 INSERTS

CODE	DESCRIPTION
0	NO INSERT
1	#4-40 FLUSH INSERT
2	#4-40 STANDOFF
3	#4-40 TAPPED HOLES 7

STEP 5 CONTACT TAIL LENGTH (A) 2 5

FOR 166 SERIES ONLY. NOT FOR 84 & 88 SERIES.

CODE	DESCRIPTION
1	.125/3.17 (FOR .062/1.57 P.C.BOARDS)
2	.170/4.32 (FOR .093/2.36 & .125/3.17 P.C.BOARDS)

SPECIFICATIONS

MATERIALS

- 6 1 Insulator ————— Thermoplastic Polyester, glass reinforced Rated UL 94V-0. Color: .085/2.16 X .151/3.83 grid, White .085/2.16 X .169/4.29 grid, White .085/2.16 X .160/4.06 grid, Black
- 2 Standard Contacts ————— Copper Alloy 725 Plating: Consult Sales Department for Options.
- 3 Dust Cover/Insertion Cap 9 ————— Thermoplastic Polycarbonate Rated UL 94V-0. Color: Blue (Plug) Red (Receptacle) Not Available For 166 Series & 8412\*\*V3Δ Connectors 8 If Need Consult Sales Department, Cover To Be Used For One Connector Insertion Only.
- 4 Insert & Stand Off ————— Brass Qty. 2

PERFORMANCE CHARACTERISTICS


Insulation resistance ————— 5,000 megohms minimum  
 Dielectric withstanding voltage (at sea level) — 1000 VAC RMS  
 Current rating ————— 1 amp @ 70°C  
 3 amp @ 20°C  
 Operating temperature range ————— -55°C to +105°C  
 Daughter Card ————— .054/1.37 TO .071/1.80

Compliant Contact 88 & 166 SERIES


Max. Insertion Force (per contact) ————— 40 lbs./178 N  
 Min. Retention Force (per contact) ————— 10 lbs./44 N

Compliant Contact 84 SERIES


Max. Insertion Force (per contact) ————— 20 lbs./89 N  
 Min. Retention Force (per contact) ————— 5 lbs./22 N



INSERT OPTION  
FOR 84, 88 & 166 SERIES  
 $\bullet$  = 1




STANDOFF OPTION 3  
FOR 84 & 88 SERIES  
 $\bullet$  = 1




AFTER ASSEMBLY INTO P.C.B. INSULATOR TO BE FLUSH TO .015/.381 MAX ABOVE P.C.B. SURFACE

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES OR INCHES/MM TOLERANCES: DECIMALS .XX ± .02/0.51 .XXX ± .005/0.127 ANGLES ± SCALE: 1:1		<p>Winchester Electronics Corporation 62 Barnes Industrial Road North Wallington, Connecticut 06492</p>
<b>CUSTOMER DRAWING</b>		
DRAWN J.T.G. 5/3/83 APPROVED J.A.D. 5/10/83	DATE 5/10/83 APPROVED J.A.D. 5/10/83	TITLE C - TEL CONNECTOR PLUG & RECEPTACLE FOR 84, 88, & 166 SERIES
A 23917		SHT. 1 OF 2 REV. N


REV	DESCRIPTION	BY DATE	APPD
N	REVISED PER ER8145	CMB 05/20/08	CMB

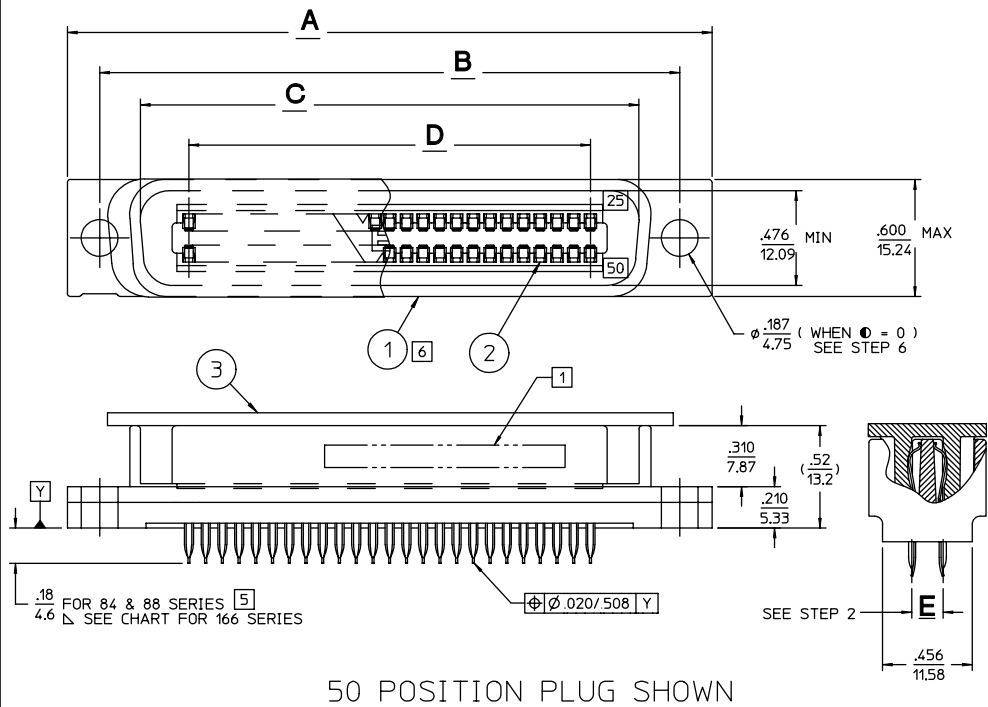


50 POSITION PLUG SHOWN

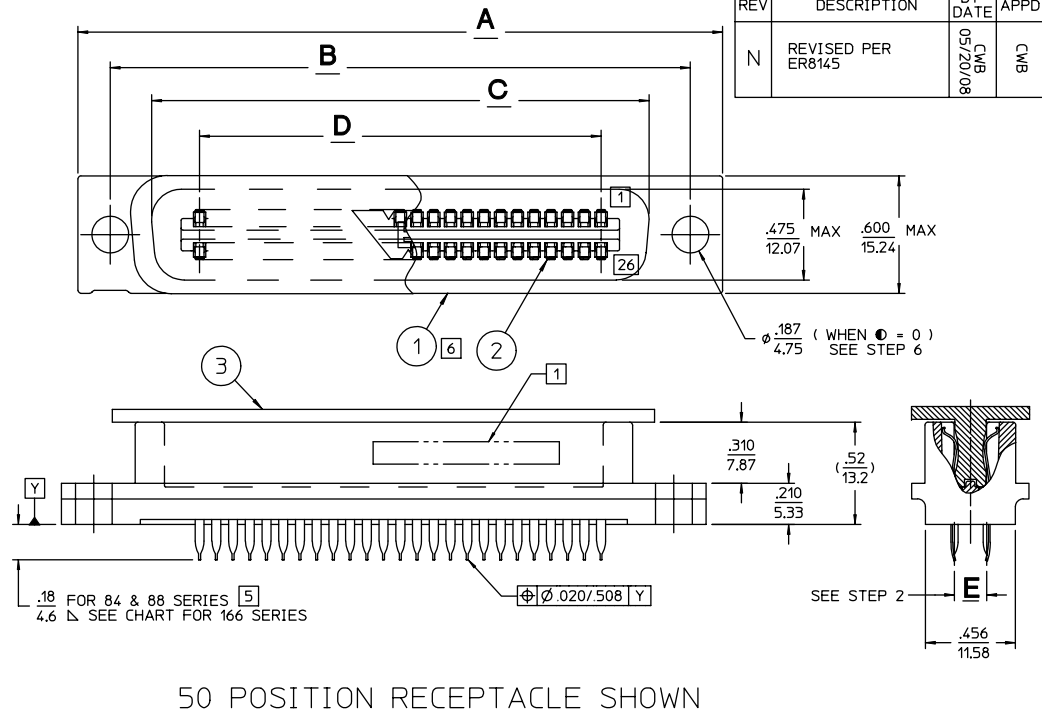

50 POSITION RECEPTACLE SHOWN

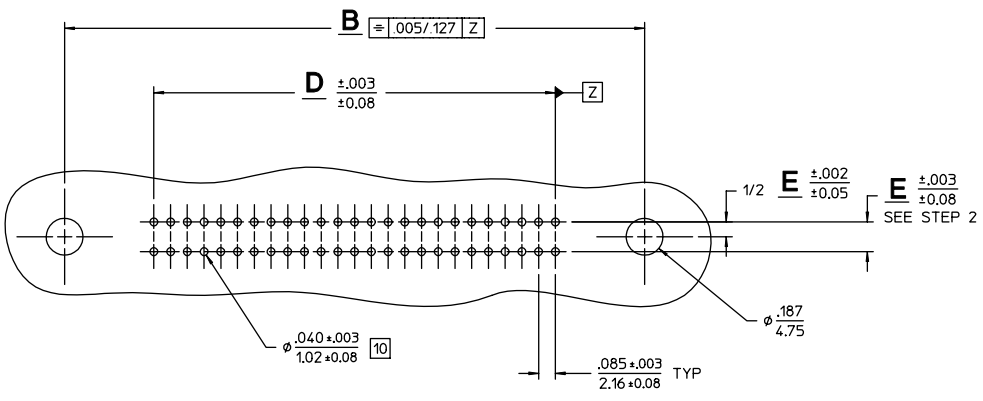

P. C. BOARD HOLE PATTERN  
84 & 166 SERIES

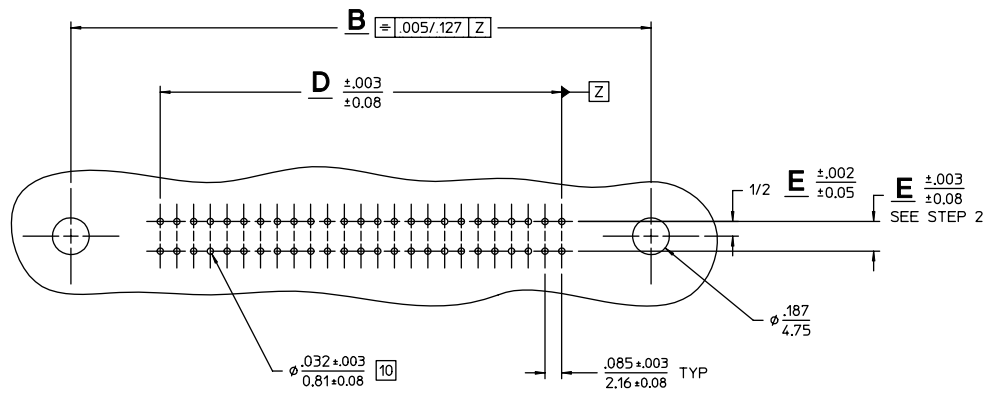

P. C. BOARD HOLE PATTERN  
84 SERIES

50	3.275/83.18	2.947/74.85	2.534/64.36	2.527/64.19	2.040/51.82
36	2.680/68.07	2.352/59.74	1.939/49.25	1.932/49.07	1.445/36.70
24	2.170/55.12	1.842/46.79	1.429/36.30	1.422/36.12	.935/23.75
14	1.745/44.32	1.417/35.99	1.004/25.50	.997/25.32	.510/12.95
No. OF CONTACTS	A	B $\pm 0.003 / \pm 0.08$	C $\pm 0.002 / \pm 0.05$ PLUG	C $\pm 0.002 / \pm 0.05$ RECEPT	D $\pm 0.003 / \pm 0.08$

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES OR INCHES/MM TOLERANCES: DECIMALS .XX ± .02/0.51 .XXX ± .005/0.127 ANGLES ± SCALE: 1:1		 Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492
<b>CUSTOMER DRAWING</b>		
DRAWN J.M.G. 10/10/98 APPROVED DATE	DATE 10/28/98 L.A.W. APPROVED DATE	TITLE C - TEL CONNECTOR PLUG & RECEPTACLE FOR 84, 88, & 166 SERIES
A		23917
SHT.2 OF 2		REV. M