


NOTES:

1 A COMBINATION OF STEP 1 AND STEP 2 EQUALS THE CONNECTOR SIZE USED IN STEP 7.  
EXAMPLE: 208, 330

| REV | DESCRIPTION          | BY DATE            | APPD |
|-----|----------------------|--------------------|------|
| A   | RELEASED PER ECR7264 | C.M.B.<br>04/05/02 | LMD  |

**POWER CONNECTOR SYSTEM CODE ORDER CHART**

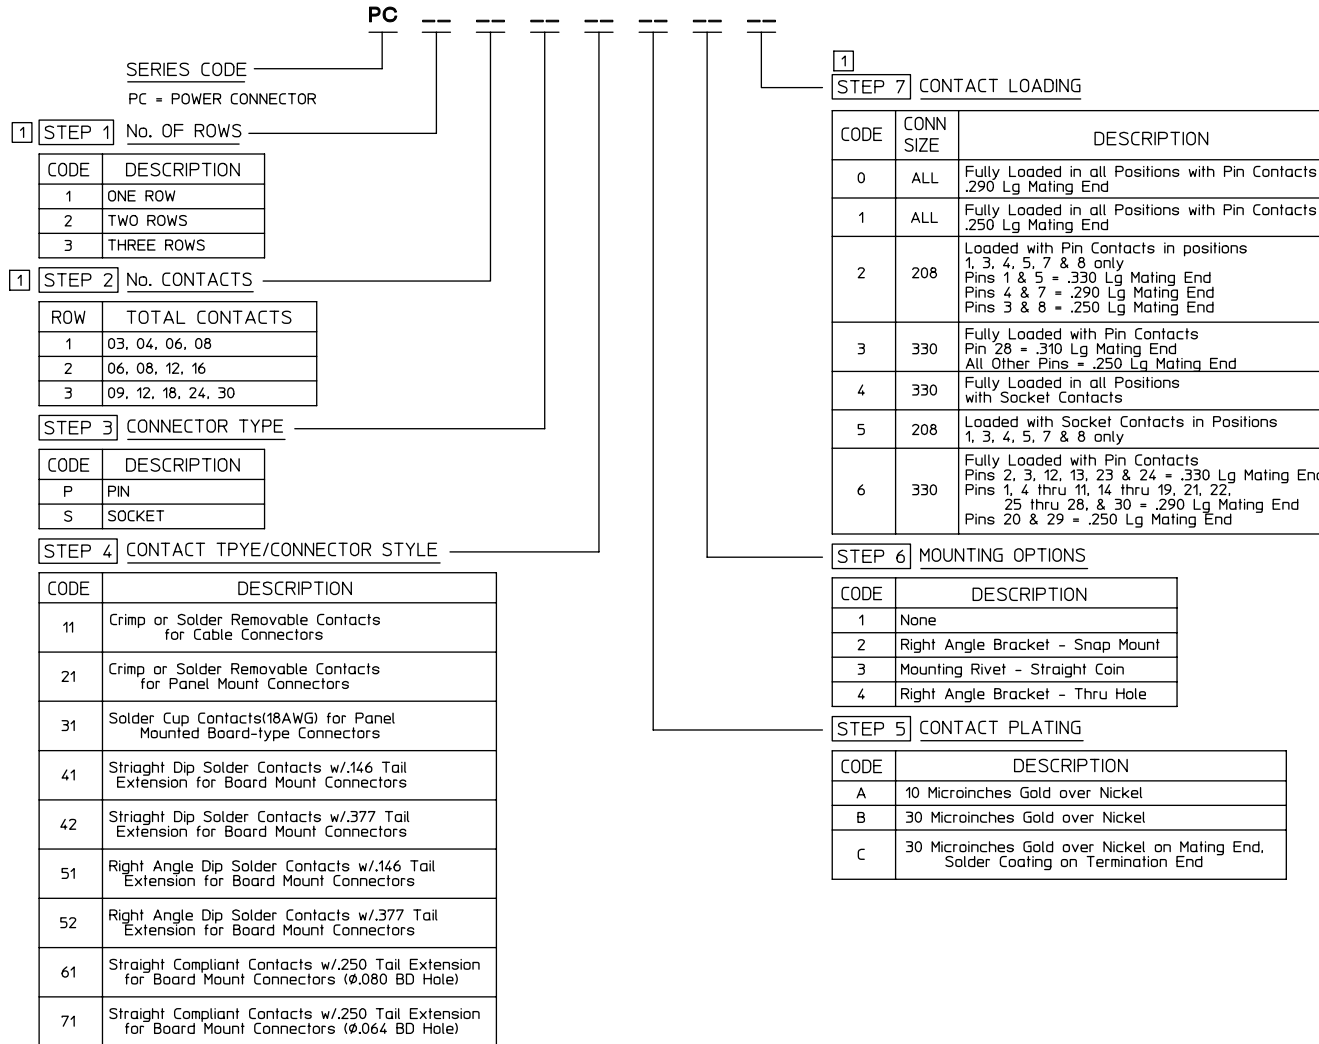

PER ASME Y14.5M-1994  
UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES OR INCHES/MM

TOLERANCES:  
DECIMALS .XX ± N/A  
.XXX ± N/A

ANGLES ±N/A SCALE: N/A

**CUSTOMER DRAWING**

|       |          |          |          |
|-------|----------|----------|----------|
| DRAWN | DATE     | APPROVED | DATE     |
| BAS   | 03/20/00 | LMD      | 04/05/02 |

**NORTHROP GRUMMAN**

Winchester Electronics  
400 Park Road  
Waterbury, CT 06796

TITLE  
**POWER CONNECTOR CODE ORDER CHART**

|      |   |       |             |      |   |
|------|---|-------|-------------|------|---|
| REV. | A | 26450 | SHT. 1 OF 1 | REV. | A |
|------|---|-------|-------------|------|---|