


Preliminary Data Sheet

Type Number:	55960
System:	Nickel Metal Hydride / KOH Electrolyte
UL Recognition:	
Nominal Voltage [V]:	1,2
Typical Capacity C [mAh]:	600
Nominal Capacity C [mAh]:	580
at 0.2 CA / 1.00 V	
Weight, approx [g]:	14,5
Coding:	Manufacturing 5 digit code (123= day/4= year/5= vers)
Temperature Ranges [°C]:	min. max.
Storage:	-20 45
Discharge:	-20 65
Charge:	0 65
Dimensions [mm]:	min. max.
Length [l]:	23,9 24,1
Width Facing [w]:	33,9 34,1
Height [h]:	6,3 6,6
Charging Method:	
Normal Charging:	58 mA for 14-16 h
Accelerated Charging (20° C): ..	175 mA for 4 h
Fast Charging :	580 mA for h *
Trickle Charging :	17,5 mA
Overcharge (20° C):	mA continuous mA 1 year
Charge Retention [%] at 20° C:	80 Capacity available after 1 month storage
Internal Resistance [Ohm]:	0,1 at charged cells, 20 °C, DC: 0.5 CA/5 CA, (IEC 285)
Impedance [Ohm]:	0,015 at charged cells
Typical Capacities [mAh]:	
at 1 CA / 0.90 V	540
at 3 CA / 0.90 V	510
at 5 CA / 0,90 V	470
Max. Discharge Current (cont.)[mA]:	3000
Life Expectancy (typical):	
IEC Cycle:	1000 Cycles
Trickle Charge:	(20° C)
Trickle Charge:	(45° C)

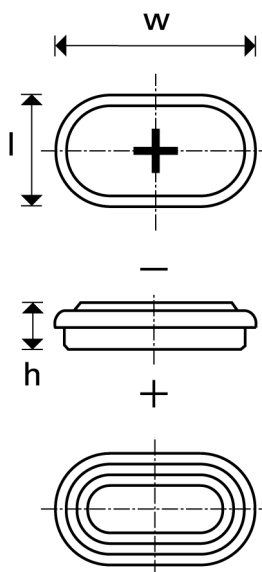

* (-dV= 5-10 mV/cell)